


CONTA-CON

PCB terminals and connectors

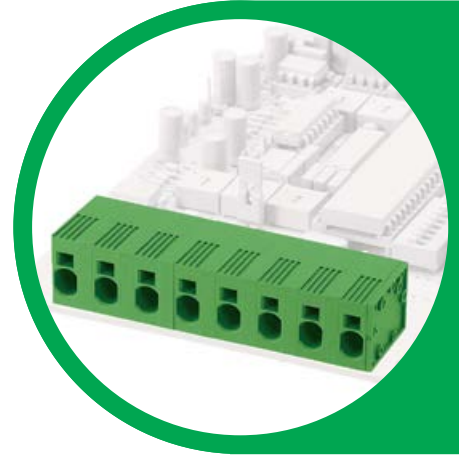

Catalogue 10

CONTACLIP

Contents

Our company	3	PCB plug-in connectors	84
The advantages online	4	Push-in female socket blocks	
Globally available for you	5	Pitch 3.50	88
Catalogues	6	Pitch 3.50	97
PCB terminals	10	Pitch 3.81	91
Push-in terminals		Pitch 5.00	93
Pitch 2.50	12	Pitch 5.08	94
Pitch 2.54	13	Pitch 7.62	95
Pitch 3.50	14	PCB plug-in connectors	
Pitch 3.81	15	Tension-spring female socket blocks	
Pitch 4.00	22	Pitch 5.00	98
Pitch 5.00	16	PCB plug-in connectors	
Pitch 5.08	18	Clamping yoke female socket blocks	
Pitch 7.50	19	Pitch 3.50	102
Pitch 11.50	21	Pitch 3.81	105
Tension-spring terminals		Pitch 5.00	108
Pitch 2.50	24	Pitch 5.08	112
Pitch 2.54	25	Pitch 7.62	118
Pitch 5.00 / 5.08	26	PCB plug-in connectors	
Pitch 7.50 / 7.62	33	Eccentric top female socket blocks	
Pitch 10.00 / 10.16	35	Pitch 5.00	120
Clamping yoke terminals		Pitch 5.08	121
Pitch 2.54	38	PCB plug-in connectors	
Pitch 3.50	39	Wire protection female socket blocks	
Pitch 3.81	40	Pitch 3.50	122
Pitch 5.00	41	Pitch 5.00	123
Pitch 5.08	48	Pitch 5.08	124
Pitch 6.35	53	Pitch 10.00	125
Pitch 7.50	54	Pitch 10.16	126
Pitch 7.62	56	PCB plug-in connectors	128
Pitch 9.52	57	Male headers in pitch	
Pitch 10.00	58	3.50 to 10.16	
Pitch 10.16	59	Plug-in connectors for DIN rail	170
Pitch 15.00	61	Feed-through terminals SDK	
Eccentric top terminals		4 mm ²	176
Pitch 5.00	62	10 mm ²	178
Pitch 7.50	63	16 mm ²	180
Pitch 10.00	64	CONTA-CON accessories	
Wire protection terminals		Coding system K	184
Pitch 3.50	66	Covers AD/ PK	185
Pitch 5.00	67	Dummy/partition plugs BLS-STL	185
Pitch 5.08	73	Labelling BK	187
Pitch 7.00	75	Locking-base system RS-SP	191
Pitch 7.50	76		
Pitch 10.00	78		
Pitch 10.16	82		



CONTA-CLIP – Thinking ahead with connection technology

CONTA-CLIP was founded in 1978. We operate globally as an owner-operated medium-sized company.

Users of electrical and electronic connection systems trust our reliable products and our many years of industrial and global market expertise.

Our company is now one of the most important manufacturers in the field.

For over 40 years, our components and solutions have been used in process and industrial automation applications, including: railway technology, materials handling, building automation, air conditioning, mechanical and facility engineering, measurement and control technology, control panel construction, shipbuilding, transformer construction and environmental technology.

Over the years, we have evolved into an innovator that sets the tone with new ideas and creative impulses.

Our employees come from a wide variety of industries and are true connectivity specialists. They understand the specific problems, requirements and challenges of our customers. This results in communication among equals.

The profits then flow into the development of new products and into modern, efficient manufacturing processes.

High quality standards throughout all departments are our top priority.

Our top-class products are supported by this interplay between top-class men and machinery. We have also designed our range of services to align with customer needs.

Our products are divided into six categories: CONTA-CONNECT for terminal blocks and accessories, CONTA-CABLE cable management systems, CONTA-ELECTRONICS for electrical and electronic switchgear cabinet components, CONTA-LABEL for marking systems, CONTA-BOX for housings, and CONTA-CON for PCB terminal blocks and connectors.

We design customer-specific solutions for electronics, provide completely assembled housings and assemblies as needed, assemble terminal blocks for series production, and quickly handle component labelling tasks.

We greet these challenges with passion and enthusiasm, because we see each customer as our partner.

CONTA-CLIP customer representatives are always ready to offer their support to the customer, because service and helpfulness are rooted deeply in our corporate philosophy.

Advantage online: the CONTA-CLIP Online Catalogue

No matter where you are, as long as you're online you can access our digital catalogue to look at our services and quickly identify suitable solutions for your requirements.

Fast results Use the full-text search, enter an order number or use the convenient "step-by-step" feature search function.

Project planning at a glance: After you've selected the products, all the master data for the materials (sales data, technical data, drawings, connection diagrams, classifications and approvals) are made available as a data sheet or export file.

Detailed inquiries about components can be sent via the shopping cart directly to our headquarters. Upon request, you will receive an e-mailed copy of your inquiry.


Application films: Complex functions be explained easily and clearly with sounds and images.

Printed catalogue: Would you like an offline overview? Please ask for our free printed catalogues.

Industry-specific: You will find the solutions that are relevant for your industry, according to your expertise.

Newsletter: Do you want to stay up to date? Subscribe to our newsletter! Simply register, confirm our authentication e-mail, and you'll be regularly informed about all CONTA-CLIP news.

Discover how the world of CONTA-CLIP and our website can deliver added value for you and your projects!

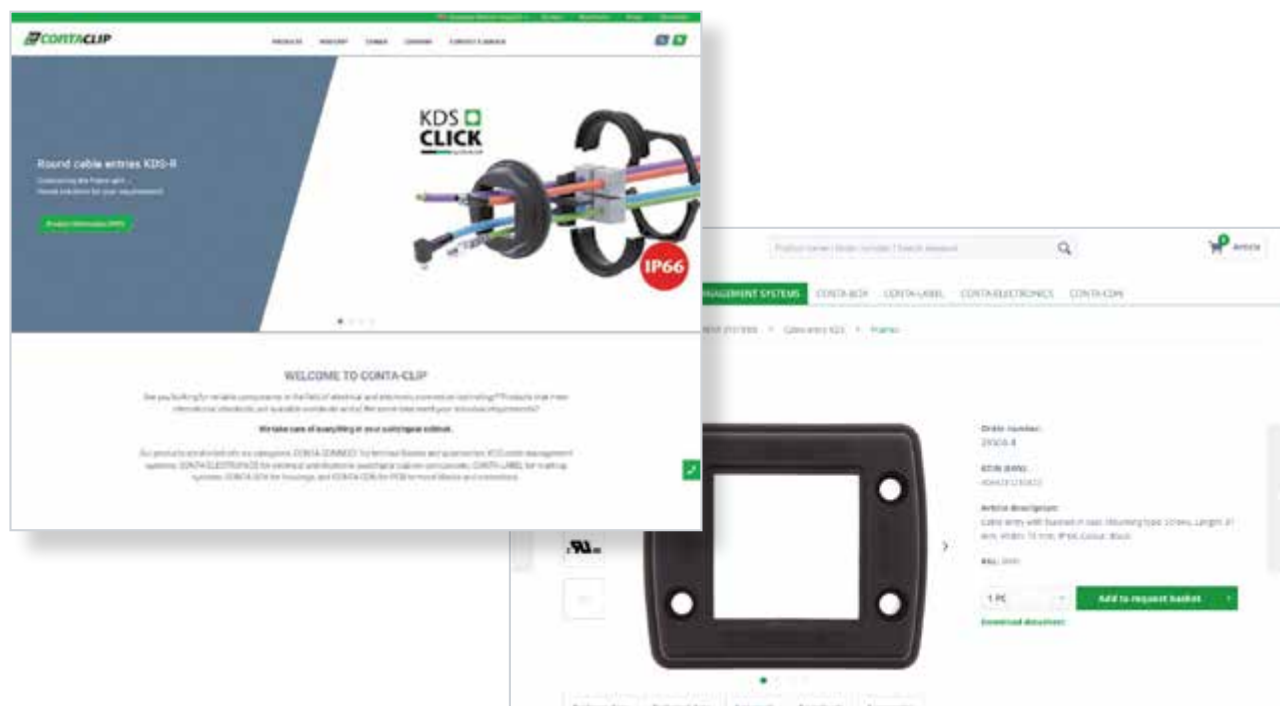

Globally available for you

Are you working abroad? No problem. Our worldwide sales and distribution partners help us to be globally networked and provide on-time reliable deliveries. Simply scan the QR code shown and you'll learn on our website about the sales partner responsible for your country.



Our locations in Africa

Algeria
Morocco
South Africa

Our locations in Asia

Bahrain
China
Hong Kong
India
Israel
Jordan
Malaysia
Oman
Pakistan
Qatar
Saudi Arabia
Singapore
South Korea
Taiwan
Turkey
United Arab Emirates

Our locations in Oceania

Australia
New Zealand

Our locations in Europe

Austria
Belarus
Belgium
Bulgaria
Croatia
Czech Republic
Denmark
Finland
France
Germany
Great Britain
Greece
Hungary
Iceland
Ireland
Italy
Latvia
Netherlands
Norway

Poland
Portugal
Romania
Russia
Serbia
Slovakia
Slovenia
Spain
Sweden
Switzerland
Ukraine

Our locations in North America


Canada
Mexico
United States

Our locations in South America

Bolivia
Brazil
Chile
Ecuador
Columbia

A complete line of products to meet your demands

The CONTA-CLIP Catalogues




01 CONTA-CONNECT

Terminal blocks with push-in connection system

Our wide range of innovative PRK and FRK terminal blocks with the Push-in connection system include feed-through terminals, PE terminals, disconnect terminals, fused terminals, multi-level terminals, installation terminals and initiator terminals, for conductor cross-sections from 0.2 mm² to 25 mm².



Cat. no. 98070.2




02 CONTA-CONNECT

Terminal blocks with screw connection system and special purpose terminals

Everything for classic wiring with screw connection system, also for high currents: SRK feed-through and PE terminals, RK high-temperature variants, TK transformer terminals, HSK high-power stud terminals and the SVB series screw distributor blocks.



Cat. no. 98071.2




03 CONTA-CONNECT

Terminal blocks with tension-spring connection system

Our versatile line of terminals with tension spring connections for conductor cross-sections from 0.2 mm² to 16 mm² includes: the ZRK/ZSL series of feed-through and PE terminals, the double-level ZRKD/ZSLD, the ZIKD three-level terminal blocks, motor-connection terminals, (blade-) disconnect terminals, fused terminals, direct-mount terminals, and initiator/actuator terminals for transmitting positioning, encoder and alert signals.



Cat. no. 98072.2




04 CONTA-CONNECT

Installation materials and other accessories for terminal blocks

Our installation products include cabling ducts, assembly tools, cable glands with metric or PG threads, DIN rails, rail holders, rail cutters and punching tools. The terminal block accessories include different versions of end stops, wire-end ferrules, and connectors.



Cat. no. 98073.2



05 CONTA-LABEL


Marking components for thermal-transfer marking systems

CONTA-CLIP provides the TTPCard thermal-transfer printer and a large selection of PC, PVC and PVCF markers or labels in card format: for professional, permanent labelling of terminals, devices, conductors, cables, facilities and switchgear cabinets.



Cat. no. 98074.2


Our catalogues are available in many languages!




06 CONTA-LABEL

Marking components for ink-based marking systems

The CONTA-LABEL products provide polyamide markers for labelling conductors, cables, devices and facilities with ink print. These markers are available in many shapes and colours: in the classic MC Maxi-Card format for self-printing with the EMS plotter system EMS or other ink-jet systems, or ready-to-use customized printed in the PMC Pocket-Maxi-Card format.



Cat. no. 98075.2




07 CONTA-BOX

Housings

Our wide variety of housings made of polystyrene, polycarbonate, polyester, ABS and aluminium deliver solutions for protecting electronic circuits, integrated devices and terminal blocks. On request, the housings can be custom-processed and assembled with our CONTA-CONNECT, CONTA-ELECTRONICS and CONTA-CON product lines.



Cat. no. 98076.2




08 CONTA-CABLE

KDS cable entries, KES cable entries, SAB|SSAB|SABK shielding solutions

The KDS and KES cable entries enable a tool-free, IP66-sealed feed-through for unassembled and assembled cables and hoses. The feed-through openings can be adapted at any time to meet your requirements. The SAB shield-connection clips can be used to provide a reliable shield contact with conductor diameters from 3 mm to 35 mm.



Cat. no. 98077.2




09 CONTA-ELECTRONICS

Electrical and electronic cabinet components

Our CONTA-ELECTRONICS products provide active and passive components for the transfer and conversion of analogue and digital signals at the coupling level. This product line includes power supplies, multi-function timing relays, coupling relays, digital switching modules, interface modules, opto-couplers, signal converters, GSM communication modules and much more.




Cat. no. 98078.2



10 CONTA-CON

PCB terminals and connectors

This catalogue presents our wide variety of CONTA-CON PCB terminal blocks and connector systems. The modular components can be configured for any required number of poles. They are available in the wire connection types: wire protection, eccentric, clamping yoke, and (for demanding operating conditions) with tension-spring or Push-in wire terminations. This product range is supplemented by the modular feed-through terminals of the SDK series.



Cat. no. 98079.2

Wire connection types



Screw wire-connect system
Wire-protected design

The wire-protected design is a user-based, cost-effective alternative to the clamping yoke design. The wire guard prevents the wire from shearing and being pushed away.



Screw wire-connect system
Clamping yoke design

The rising clamp design applies indirect pressure on the wire via the screw and clamping yoke, thus pressing the wire against the busbar (soldering lug). The required contact force is generated by the torque applied to the screw. This system provides a gas-tight vibration-proof connection between the conductor and the internal busbar. This creates increasing thread friction and results automatically in a stronger grip on the conductor. The increased torque is generated by an elastic distortion of the terminal body.



Eccentric top wire-connect system
Eccentric top design

In the eccentric top design, the wire is guided into the clamping point parallel to the screwdriver in the viewing direction. For certain mounting conditions (e.g. with minimal lateral gaps in mounting frames), this system offers the operator very good access to the wire connection level. This wire connection system normally comes with two soldering lugs.

Ordering information for standard PCB terminals

PK	100/ 12 / 5,08	V	F	Colour name	
Series name	No. of poles	Pitch in mm	Direction of wire connection	Additional information	Colour code
PK PKZ PKD PKDR PKDL PKZK PKT PBK PBKZ PKB PKBZ IPKBZ PZB PBT STL PK-TS PFB PFBZ ISTLZ STLZ			V =vertical screw / plug-in direction H =horizontal screw / plug-in direction	F =with flange G =With side wall KD =with blade pusher FD =with finger pusher WD=with angle pusher VP =with staggered pins BL =block design BR =with internal bridging HC =high-current version	Will be mentioned whenever the colour de- viates from the standard colour green.

Pitch dimensions



Tension-spring connection

The tension-spring design

The tension spring functions in a manner similar to the conventional clamping yoke. The tension spring also separates the mechanical and electrical functions. The tension spring is made of high-quality, rust- and acid-resistant steel. It pulls the wire against the galvanized copper busbar. Low contact resistance and high corrosion resistance are enabled by the tin surface of the busbar. These are maintained over a long duration due to the compensatory effect.



Push-in wire connection


Push-in termination

Using the Push-in design, it is possible to insert solid conductors or finely stranded wires with wire-end ferrules directly into the clamping point. The Push-in spring contacts the wire against the busbar. The pusher must be actuated when connecting finely stranded wires without ferrules or when disconnecting the wires.

metric



2.50 mm



3.50 mm



4.00 mm



5.00 mm




7.00 mm




7.50 mm



10.00 mm



11.50 mm



15.00 mm

Inches



2.54 mm



3.81 mm



5.08 mm




6.35 mm



7.62 mm



9.52 mm



10.16 mm

Approvals



EN 60998
EN 61984



UL 1059
CSA 22.2 No. 158

When developing terminal blocks and plug-in connectors, CONTA-CLIP considers all relevant up-to-date standards and regulations.

Three standards are used for VDE approval:

- Screw and screwless terminal standards: EN 60998-1, EN 60998-2-1, EN 60998-2-2
- Screw and screwless plug-in connector standard: EN 60947-7-4
- Screw and screwless plug-in connector standard: EN 61984


For cURus approval, the following standards have been applied for both terminal blocks and plug-in connectors: UL 1059, UL 1977 and CSA 22.2 No. 158. The cURus symbol indicates that the safety requirements have been met for both the Canadian and the US market.

In addition, EN 60664-1/VDE 0110-1 is the foundation for the insulation coordination for equipment in low-voltage systems. This generally applies to equipment used up to an altitude of 2,000 metres above sea level; at an altitude above 2,000 metres above sea level, altitude correction factors must be applied.

PCB terminals


Solder-on PCB terminals or terminal blocks are used to connect stranded wires to components or circuits on the printed circuit board. Our large range of PCB terminal blocks covers all types of wire connections. It includes spring termination based on tension spring or Push-in design, as well as screw terminal, wire protection, eccentric top and clamping yoke designs. The choice of the appropriate type of wire termination depends on the environmental conditions to which the printed circuit board will be exposed in the end application. The Push-in or tension-spring design is particularly suitable for reliable contacting where there are vibrations, corrosive influences and strong temperature fluctuations. Depending on the variant, the springs can be actuated using

a screwdriver, actuating tool or actuating lever. Our terminal block series are distinguished by either an expandable or fixed block design. The modular design of the PCB terminal blocks enables dovetail connections. These can be made up of 2-pole and 3-pole individual terminal blocks according to your requirements and application. Thus, you can assemble higher pole-count terminals which provide a clear advantage for reduced inventory. Alternatively, we offer product series in fixed-block (up to 12-pole block) design, which simplifies the configuration of more extensive applications. The materials we use guarantee a permanently high clamping force and good electrical values.


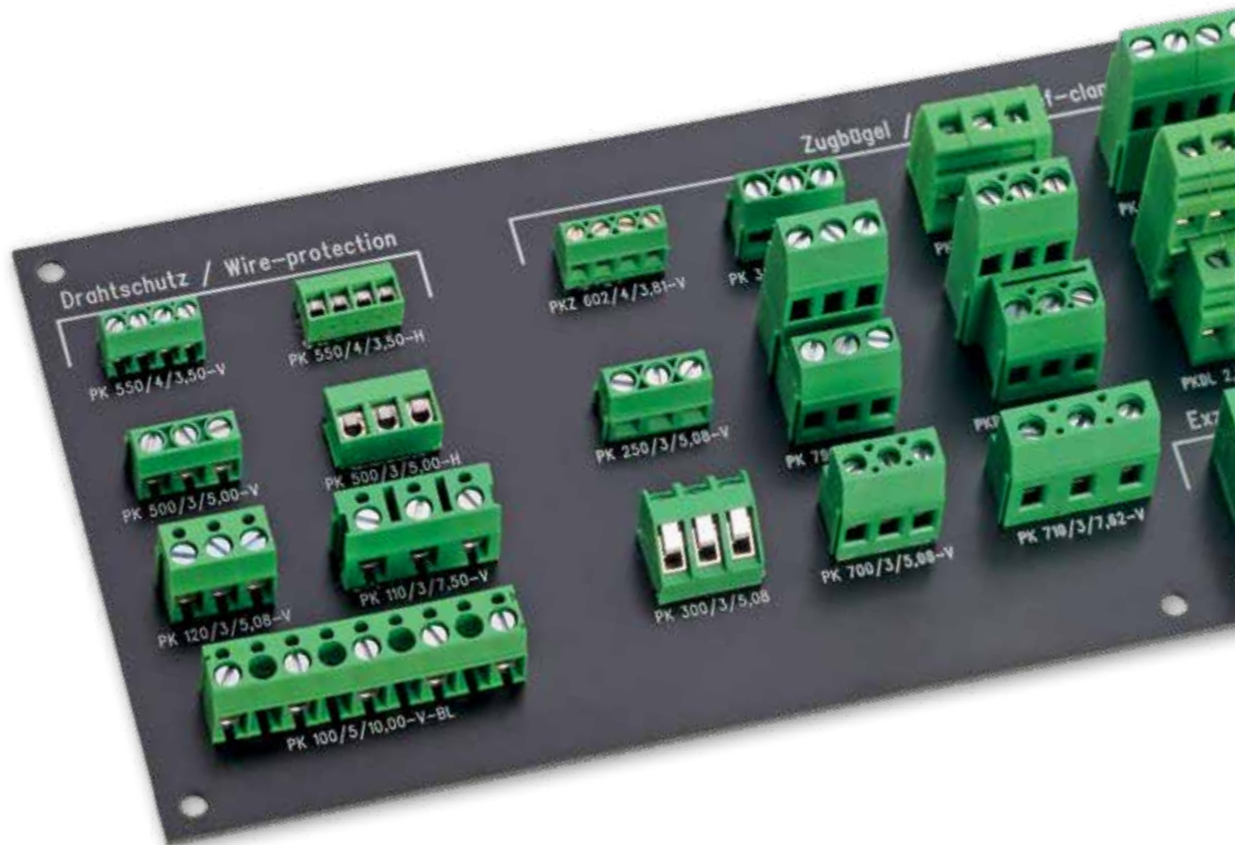


Features

- Push-in, tension-spring or screw-connection wire termination systems
- Wire cross-section up to 6 mm²
- Material: PA 6.6 UL 94 V-0
- Up to 24 poles
- Good electrical and mechanical characteristics

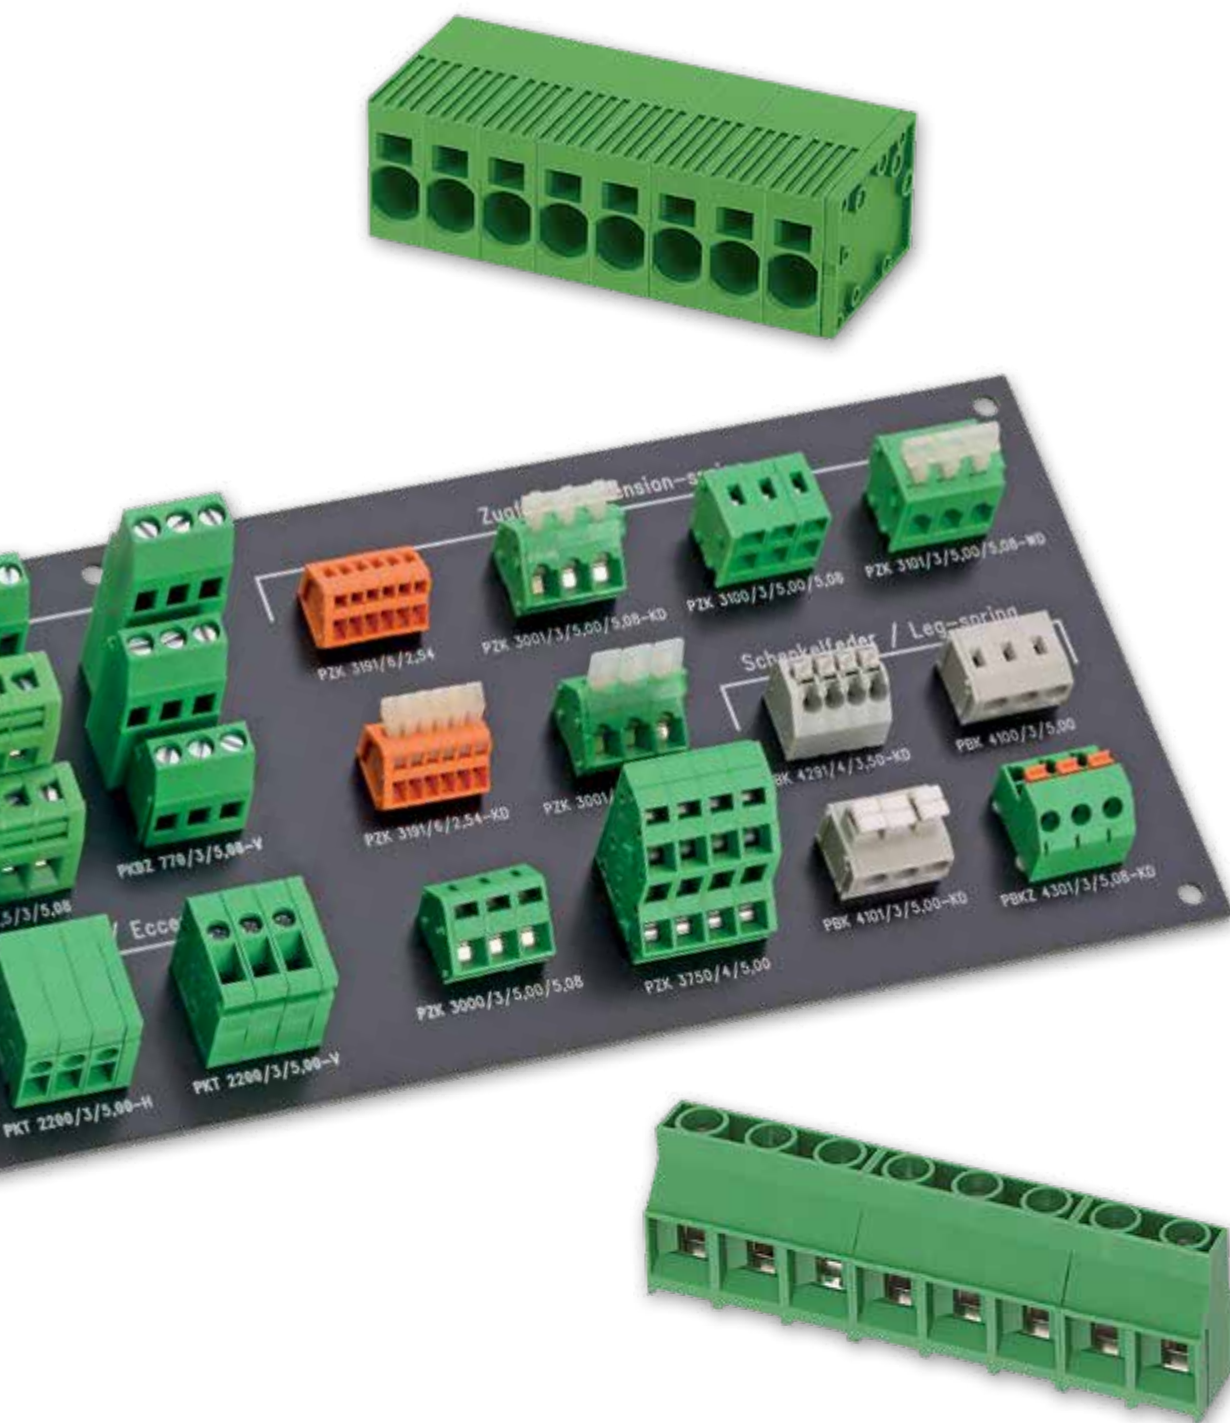

Push-in terminals

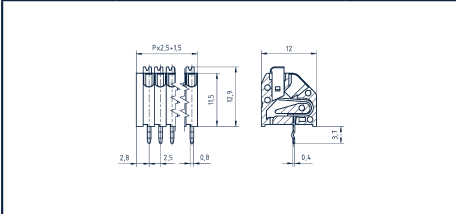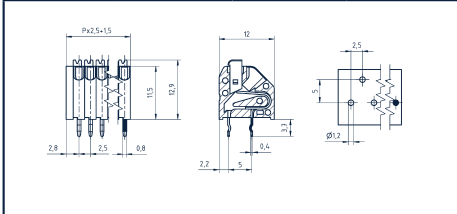Terminals	PBK 4191/.../2.50-KD	PBK 4191/.../2.50-KDVP
		
Diagrams		
Connection type	Push-in	Push-in
Dimensions		
Pitch, mm	2.50	2.50
Stripping length, mm	9.00	9.00
Drill hole diameter, mm	1.20	1.20
Cross-section		
Solid (rigid) mm ²	0.14-0.75	0.14-0.75
Finely stranded (flexible) mm ²	0.14-0.75	0.14-0.75
Flexible (with wire-end ferrule) mm ²	0.14-0.34	0.14-0.34
Ratings		
User group	cULus*	cULus*
Rated voltage (V)	B 150	B 150
Rated current (A)	C 2	C 2
Overvoltage category	D 150	D 150
Max. cross-section AWG / mm ²	26-20	26-20
Rated surge voltage (kV)	1.30	1.30
Torque NM / Screw size	1.30	1.30
Contamination degree	3	3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Contact pin	Bronze	Bronze
Spring		
Soldering lug	Copper alloy	Copper alloy
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information		
	No. of poles	No. of poles
	Cat. no.	Cat. no.
	Qty.	Qty.
	● (RAL 7032)	● (RAL 7032)
	2 14552.0 50	2 14572.0 50
	3 14553.0 50	3 14573.0 50
	4 14554.0 50	4 14574.0 50
	5 14555.0 50	5 14575.0 50
	6 14556.0 50	6 14576.0 50
	7 14557.0 50	7 14577.0 50
	8 14558.0 50	8 14578.0 50
	9 14559.0 50	9 14579.0 50
	10 14560.0 50	10 14580.0 50
	11 14561.0 50	11 14581.0 50
	12 14562.0 50	12 14582.0 50
Accessories		
Labelling	Refer to page 186.	Refer to page 186.

* Approvals applied for

Terminals





PBKZ 4791/.../2.54-V-KD



PBKZ 4791/.../2.54-H-KD



Diagrams

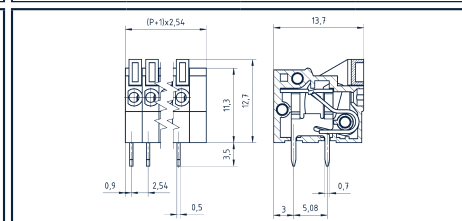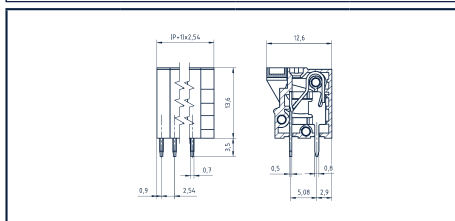

Connection type

Push-in

Push-in

Dimensions

Pitch mm

2.54

2.54

Stripping length mm

10.00

10.00

Drill hole diameter mm

2 x 1.20

2 x 1.20

Cross-section

Solid (rigid) mm²

0.14-0.75

0.14-0.75

Finely stranded (flexible) mm²

0.14-0.75

0.14-0.75

Finely stranded (with wire-end ferrule) mm²

0.14

0.14

Ratings

User group

cULus* cULus* 

Rated voltage (V)

B 150

C

D 130

B 150

C

D 130

Rated current (A)

6

9

III

6

9

III

Overvoltage category

Max. cross-section AWG / mm²

26-18

0.20-0.75

26-18

0.20-0.75

Rated surge voltage (kV)

1.30

1.25

1.30

1.25

Torque NM / Screw size

Contamination degree

3

3

Material

Insulation material / Flammability class

PBT / UL 94 V-0

PBT / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Contact pin

Spring

Stainless steel

Stainless steel

Soldering lug

Copper alloy

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

3 / 4 s

Order information

Standard colour(s)

No. of poles Cat. no. Qty.

● (RAL 6018)

No. of poles Cat. no. Qty.

● (RAL 6018)

Other colours on request.

2 14592.1 50

2 14612.1 50

Terminal without end plate

3 14593.1 50

3 14613.1 50

Terminal with end plate

4 14594.1 50

4 14614.1 50

5 14595.1 50

5 14615.1 50

6 14596.1 50

6 14616.1 50

7 14597.1 50

7 14617.1 50

8 14598.1 50

8 14618.1 50

9 14599.1 50

9 14619.1 50

10 14600.1 50

10 14620.1 50

11 14601.1 50

11 14621.1 50

12 14602.1 50

12 14622.1 50



Accessories



Labelling

Refer to page 186.



Refer to page 186.

Push-in terminals

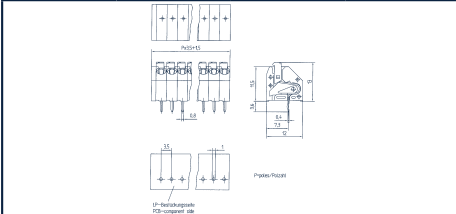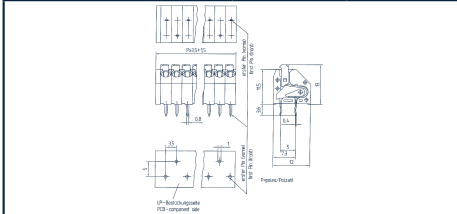Terminals	PBK 4291/.../3.50-KD	PBK 4291/.../3.50-KDVP
		
Diagrams		
Connection type	Push-in	Push-in
Dimensions		
Pitch, mm	3.50	3.50
Stripping length, mm	9.00	9.00
Drill hole diameter, mm	1.00	1.00
Cross-section		
Solid (rigid) mm ²	0.08-1.50	0.08-1.50
Finely stranded (flexible) mm ²	0.14-1.00	0.14-1.00
Finely stranded (with wire-end ferrule) mm ²	0.14-0.50	0.14-0.50
Ratings		
User group	cULus 	cULus 
Rated voltage (V)	B 300	B 300
Rated current (A)	C 6	C 6
Overvoltage category	D III	D III
Max. cross-section AWG / mm ²	22-16 0.75	22-16 0.75
Rated surge voltage (kV)	1.60 2.00	1.60 2.00
Contamination degree	3	3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Contact pin		
Soldering lug	Copper alloy	Copper alloy
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information		
Standard colour(s)	No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
Other colours on request.	● (RAL 7032)	● (RAL 7032)
	2 13286.0 50	2 13310.0 50
	3 13287.0 50	3 13311.0 50
	4 13288.0 50	4 13312.0 50
	5 13289.0 50	5 13313.0 50
	6 13290.0 50	6 13314.0 50
	7 13291.0 50	7 13315.0 50
	8 13292.0 50	8 13316.0 50
	9 13293.0 50	9 13317.0 50
	10 13294.0 50	10 13318.0 50
	11 13295.0 50	11 13319.0 50
	12 13296.0 50	12 13320.0 50
	13 13297.0 50	13 13321.0 50
	14 13298.0 50	14 13322.0 50
	15 13299.0 50	15 13323.0 50
	16 13300.0 50	16 13324.0 50
	17 13301.0 50	17 13325.0 50
	18 13302.0 50	18 13326.0 50
	19 13303.0 50	19 13327.0 50
	20 13304.0 50	20 13328.0 50
	21 13305.0 50	21 13329.0 50
	22 13306.0 50	22 13330.0 50
	23 13307.0 50	23 13331.0 50
	24 13308.0 50	24 13332.0 50
Accessories		
Labelling	Refer to page 186.	Refer to page 186.

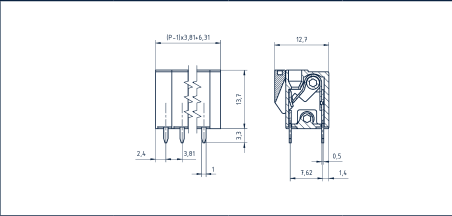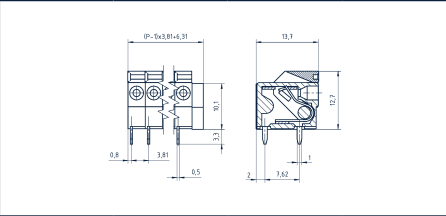Terminals	PBKZ 4701/.../3.81-V-KD	PBKZ 4701/.../3.81-H-KD
		
Diagrams		
Connection type	Push-in	Push-in
Dimensions		
Pitch, mm	3.81	3.81
Stripping length, mm	10.00	10.00
Drill hole diameter, mm	2 x 1.40	2 x 1.40
Cross-section		
Solid (rigid) mm²	0.14-1.50	0.14-1.50
Finely stranded (flexible) mm²	0.14-1.50	0.14-1.50
Finely stranded (with wire-end ferrule) mm²	0.14-0.34	0.14-0.34
Ratings		
User group	cULus* 	cULus* 
Rated voltage (V)	B 300	B 300
Rated current (A)	C 6	C 6
Overvoltage category	D 3	D 3
Max. cross-section AWG / mm²	26-16	26-16
Rated surge voltage (kV)	1.60	1.60
Contamination degree	3	3
Material		
Insulation material / Flammability class	PBT / UL 94 V-0	PBT / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Spring	Stainless steel	Stainless steel
Soldering lug	Brass	Brass
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information		
Standard colour(s)	No. of poles Cat. no. Qty. ● (RAL 6018)	No. of poles Cat. no. Qty. ● (RAL 6018)
Other colours on request.	2 14632.1 50	2 14652.1 50
	3 14633.1 50	3 14653.1 50
	4 14634.1 50	4 14654.1 50
	5 14635.1 50	5 14655.1 50
	6 14636.1 50	6 14656.1 50
	7 14637.1 50	7 14657.1 50
	8 14638.1 50	8 14658.1 50
	9 14639.1 50	9 14659.1 50
	10 14640.1 50	10 14660.1 50
	11 14641.1 50	11 14661.1 50
	12 14642.1 50	12 14662.1 50
Accessories		
Labelling	Refer to page 186.	Refer to page 186.

Push-in terminals

Terminals	PBK 4100/.../5.00	PBK 4101/.../5.00																																																																																																																																																						
5.00 mm																																																																																																																																																								
Diagrams																																																																																																																																																								
Connection type	Push-in	Push-in																																																																																																																																																						
Dimensions																																																																																																																																																								
Pitch, mm	5.00	5.00																																																																																																																																																						
Stripping length, mm	9.00	9.00																																																																																																																																																						
Drill hole diameter, mm	2 x 1.00	2 x 1.00																																																																																																																																																						
Cross-section																																																																																																																																																								
Solid (rigid) mm²	0.08-2.50	0.08-2.50																																																																																																																																																						
Finely stranded (flexible) mm²	0.08-1.50	0.08-1.50																																																																																																																																																						
Finely stranded (with wire-end ferrule) mm²	0.14-1.00	0.14-1.00																																																																																																																																																						
Ratings																																																																																																																																																								
User group	<table><tr><th>B</th><th>C</th><th>D</th><th>cULus</th><th>VDE</th></tr><tr><td>300</td><td></td><td>300</td><td></td><td>250</td></tr><tr><td>10</td><td></td><td>10</td><td></td><td>17.5</td></tr><tr><td></td><td></td><td></td><td></td><td>III</td></tr><tr><td>20-14</td><td></td><td>20-14</td><td></td><td>2.50</td></tr><tr><td>1.60</td><td></td><td>1.60</td><td></td><td>2.00</td></tr><tr><td></td><td></td><td></td><td></td><td>3</td></tr></table>	B	C	D	cULus	VDE	300		300		250	10		10		17.5					III	20-14		20-14		2.50	1.60		1.60		2.00					3	<table><tr><th>B</th><th>C</th><th>D</th><th>cULus</th><th>VDE</th></tr><tr><td>300</td><td></td><td>300</td><td></td><td>250</td></tr><tr><td>10</td><td></td><td>10</td><td></td><td>17.5</td></tr><tr><td></td><td></td><td></td><td></td><td>III</td></tr><tr><td>20-14</td><td></td><td>20-14</td><td></td><td>2.50</td></tr><tr><td>1.60</td><td></td><td>1.60</td><td></td><td>2.00</td></tr><tr><td></td><td></td><td></td><td></td><td>3</td></tr></table>	B	C	D	cULus	VDE	300		300		250	10		10		17.5					III	20-14		20-14		2.50	1.60		1.60		2.00					3																																																																																
B	C	D	cULus	VDE																																																																																																																																																				
300		300		250																																																																																																																																																				
10		10		17.5																																																																																																																																																				
				III																																																																																																																																																				
20-14		20-14		2.50																																																																																																																																																				
1.60		1.60		2.00																																																																																																																																																				
				3																																																																																																																																																				
B	C	D	cULus	VDE																																																																																																																																																				
300		300		250																																																																																																																																																				
10		10		17.5																																																																																																																																																				
				III																																																																																																																																																				
20-14		20-14		2.50																																																																																																																																																				
1.60		1.60		2.00																																																																																																																																																				
				3																																																																																																																																																				
Rated voltage (V)																																																																																																																																																								
Rated current (A)																																																																																																																																																								
Overtoltage category																																																																																																																																																								
Max. cross-section AWG / mm²																																																																																																																																																								
Rated surge voltage (kV)																																																																																																																																																								
Contamination degree																																																																																																																																																								
Material																																																																																																																																																								
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0																																																																																																																																																						
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C																																																																																																																																																						
Spring	Stainless steel	Stainless steel																																																																																																																																																						
Soldering lug	Copper alloy	Copper alloy																																																																																																																																																						
Wave soldering process																																																																																																																																																								
Recommended wave soldering temperature	260 °C	260 °C																																																																																																																																																						
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s																																																																																																																																																						
Order information																																																																																																																																																								
Standard colour(s)	<table><tr><th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr><tr><td></td><td>● (RAL 7032)</td><td></td></tr><tr><td>2</td><td>13085.0</td><td>50</td></tr><tr><td>3</td><td>13086.0</td><td>50</td></tr><tr><td>4</td><td>13087.0</td><td>50</td></tr><tr><td>5</td><td>13088.0</td><td>50</td></tr><tr><td>6</td><td>13089.0</td><td>50</td></tr><tr><td>7</td><td>13090.0</td><td>50</td></tr><tr><td>8</td><td>13091.0</td><td>50</td></tr><tr><td>9</td><td>13092.0</td><td>50</td></tr><tr><td>10</td><td>13093.0</td><td>50</td></tr><tr><td>11</td><td>13094.0</td><td>50</td></tr><tr><td>12</td><td>13095.0</td><td>50</td></tr><tr><td>13</td><td>13096.0</td><td>50</td></tr><tr><td>14</td><td>13097.0</td><td>50</td></tr><tr><td>15</td><td>13098.0</td><td>50</td></tr><tr><td>16</td><td>13099.0</td><td>50</td></tr><tr><td>17</td><td>13100.0</td><td>50</td></tr><tr><td>18</td><td>13101.0</td><td>50</td></tr><tr><td>19</td><td>13102.0</td><td>50</td></tr><tr><td>20</td><td>13103.0</td><td>50</td></tr><tr><td>21</td><td>13104.0</td><td>50</td></tr><tr><td>22</td><td>13105.0</td><td>50</td></tr><tr><td>23</td><td>13106.0</td><td>50</td></tr><tr><td>24</td><td>13107.0</td><td>50</td></tr></table>	No. of poles	Cat. no.	Qty.		● (RAL 7032)		2	13085.0	50	3	13086.0	50	4	13087.0	50	5	13088.0	50	6	13089.0	50	7	13090.0	50	8	13091.0	50	9	13092.0	50	10	13093.0	50	11	13094.0	50	12	13095.0	50	13	13096.0	50	14	13097.0	50	15	13098.0	50	16	13099.0	50	17	13100.0	50	18	13101.0	50	19	13102.0	50	20	13103.0	50	21	13104.0	50	22	13105.0	50	23	13106.0	50	24	13107.0	50	<table><tr><th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr><tr><td></td><td>● (RAL 7032)</td><td></td></tr><tr><td>2</td><td>13108.0</td><td>50</td></tr><tr><td>3</td><td>13109.0</td><td>50</td></tr><tr><td>4</td><td>13110.0</td><td>50</td></tr><tr><td>5</td><td>13111.0</td><td>50</td></tr><tr><td>6</td><td>13112.0</td><td>50</td></tr><tr><td>7</td><td>13113.0</td><td>50</td></tr><tr><td>8</td><td>13114.0</td><td>50</td></tr><tr><td>9</td><td>13115.0</td><td>50</td></tr><tr><td>10</td><td>13116.0</td><td>50</td></tr><tr><td>11</td><td>13117.0</td><td>50</td></tr><tr><td>12</td><td>13118.0</td><td>50</td></tr><tr><td>13</td><td>13119.0</td><td>50</td></tr><tr><td>14</td><td>13120.0</td><td>50</td></tr><tr><td>15</td><td>13121.0</td><td>50</td></tr><tr><td>16</td><td>13122.0</td><td>50</td></tr><tr><td>17</td><td>13123.0</td><td>50</td></tr><tr><td>18</td><td>13124.0</td><td>50</td></tr><tr><td>19</td><td>13125.0</td><td>50</td></tr><tr><td>20</td><td>13126.0</td><td>50</td></tr><tr><td>21</td><td>13127.0</td><td>50</td></tr><tr><td>22</td><td>13128.0</td><td>50</td></tr><tr><td>23</td><td>13129.0</td><td>50</td></tr><tr><td>24</td><td>13130.0</td><td>50</td></tr></table>	No. of poles	Cat. no.	Qty.		● (RAL 7032)		2	13108.0	50	3	13109.0	50	4	13110.0	50	5	13111.0	50	6	13112.0	50	7	13113.0	50	8	13114.0	50	9	13115.0	50	10	13116.0	50	11	13117.0	50	12	13118.0	50	13	13119.0	50	14	13120.0	50	15	13121.0	50	16	13122.0	50	17	13123.0	50	18	13124.0	50	19	13125.0	50	20	13126.0	50	21	13127.0	50	22	13128.0	50	23	13129.0	50	24	13130.0	50
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 7032)																																																																																																																																																							
2	13085.0	50																																																																																																																																																						
3	13086.0	50																																																																																																																																																						
4	13087.0	50																																																																																																																																																						
5	13088.0	50																																																																																																																																																						
6	13089.0	50																																																																																																																																																						
7	13090.0	50																																																																																																																																																						
8	13091.0	50																																																																																																																																																						
9	13092.0	50																																																																																																																																																						
10	13093.0	50																																																																																																																																																						
11	13094.0	50																																																																																																																																																						
12	13095.0	50																																																																																																																																																						
13	13096.0	50																																																																																																																																																						
14	13097.0	50																																																																																																																																																						
15	13098.0	50																																																																																																																																																						
16	13099.0	50																																																																																																																																																						
17	13100.0	50																																																																																																																																																						
18	13101.0	50																																																																																																																																																						
19	13102.0	50																																																																																																																																																						
20	13103.0	50																																																																																																																																																						
21	13104.0	50																																																																																																																																																						
22	13105.0	50																																																																																																																																																						
23	13106.0	50																																																																																																																																																						
24	13107.0	50																																																																																																																																																						
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 7032)																																																																																																																																																							
2	13108.0	50																																																																																																																																																						
3	13109.0	50																																																																																																																																																						
4	13110.0	50																																																																																																																																																						
5	13111.0	50																																																																																																																																																						
6	13112.0	50																																																																																																																																																						
7	13113.0	50																																																																																																																																																						
8	13114.0	50																																																																																																																																																						
9	13115.0	50																																																																																																																																																						
10	13116.0	50																																																																																																																																																						
11	13117.0	50																																																																																																																																																						
12	13118.0	50																																																																																																																																																						
13	13119.0	50																																																																																																																																																						
14	13120.0	50																																																																																																																																																						
15	13121.0	50																																																																																																																																																						
16	13122.0	50																																																																																																																																																						
17	13123.0	50																																																																																																																																																						
18	13124.0	50																																																																																																																																																						
19	13125.0	50																																																																																																																																																						
20	13126.0	50																																																																																																																																																						
21	13127.0	50																																																																																																																																																						
22	13128.0	50																																																																																																																																																						
23	13129.0	50																																																																																																																																																						
24	13130.0	50																																																																																																																																																						
Accessories																																																																																																																																																								
Labelling	Refer to page 186.	Refer to page 186.																																																																																																																																																						

Terminals





PBK 2.5/.../5.00-V



PBK 2.5/.../5.00-H



Diagrams

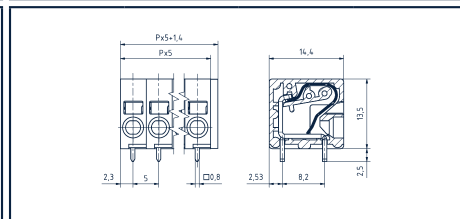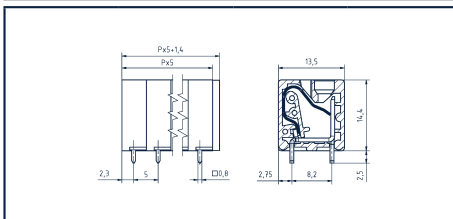

Connection type

Push-in

Push-in

Dimensions

Pitch, mm

5.00

5.00

Stripping length, mm

10.00

10.00

Drill hole diameter, mm

2 x 1.10

2 x 1.10

Cross-section

Solid (rigid) mm²

0.20-4.00

0.20-4.00

Finely stranded (flexible) mm²

0.20-2.50

0.20-2.50

Finely stranded (with wire-end ferrule) mm²

0.20-2.50

0.20-2.50

Ratings

User group

Rated voltage (V)

300

300

250

Rated current (A)

20

10

24

Overvoltage category

III

Max. cross-section AWG / mm²

24-12

24-12

0.20-2.50

Rated surge voltage (kV)

1.60

1.60

2.00

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Spring

Stainless steel

Stainless steel

Soldering lug

Copper alloy

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

3 / 4 s

Order information

Standard colour(s)

● (RAL 6018)

● (RAL 6018)

Other colours on request.

Terminal without end plate

1

14340.1

50

1

14360.1

50

Terminal with end plate

1

14341.1

50

1

14361.1

50

2

14342.1

50

2

14362.1

50

3

14343.1

50

3

14363.1

50

4

14344.1

50

4

14364.1

50

5

14345.1

50

5

14365.1

50

6

14346.1

50

6

14366.1

50

7

14347.1

50

7

14367.1

50

8

14348.1

50

8

14368.1

50

9

14349.1

50

9

14369.1

50

10

14350.1

50

10

14370.1

50

11

14351.1

50

11

14371.1

50

12

14352.1

50

12

14372.1

50

Accessories

End plate AP

Cat. no.

Qty.

AP/PBK 2.5 GN

14379.1

100

Labelling

Refer to page 186.

AP/PBK 2.5 GN

14379.1

100

Refer to page 186.

PBKZ 4301/.../5.08-KD



Accessories	
Labelling	Refer to page 186.

Terminals





PBK 2.5/.../7.50-V



PBK 2.5/.../7.50-H



Diagrams

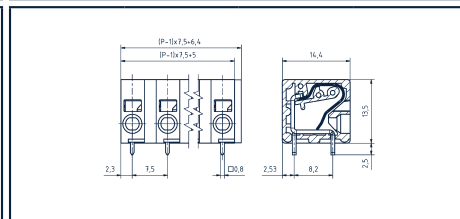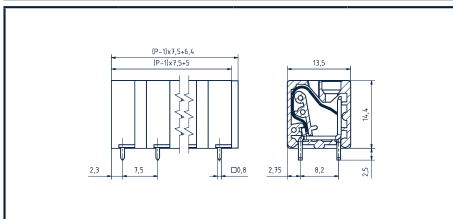

Connection type

Push-in

Push-in

Dimensions

Pitch, mm

7.50

7.50

Stripping length, mm

10.00

10.00

Drill hole diameter, mm

2 x 1.10

2 x 1.10

Cross-section

Solid (rigid) mm²

0.20-4.00

0.20-4.00

Finely stranded (flexible) mm²

0.20-2.50

0.20-2.50

Finely stranded (with wire-end ferrule) mm²

0.20-2.50

0.20-2.50

Ratings

User group

Rated voltage (V)

300

150

300

250

Rated current (A)

20

20

10

24

Overvoltage category

III

Max. cross-section AWG / mm²

24-12

24-12

24-12

0.20-2.50

Rated surge voltage (kV)

1.60

1.30

1.60

3.00

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Spring

Stainless steel

Stainless steel

Soldering lug

Copper alloy

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

3 / 4 s

Order information

Standard colour(s)

● (RAL 6018)

● (RAL 6018)

Other colours on request.

Terminal without end plate

1

14380.1

50

1

14400.1

50

Terminal with end plate

1

14381.1

50

1

14401.1

50

2

14382.1

50

2

14402.1

50

3

14383.1

50

3

14403.1

50

4

14384.1

50

4

14404.1

50

5

14385.1

50

5

14405.1

50

6

14386.1

50

6

14406.1

50

7

14387.1

50

7

14407.1

50

8

14388.1

50

8

14408.1

50

9

14389.1

50

9

14409.1

50

10

14390.1

50

10

14410.1

50

11

14391.1

50

11

14411.1

50

12

14392.1

50

12

14412.1

50

Accessories

End plate AP

Cat. no.

Qty.

AP/PBK 2.5 GN

14379.1

100

AP/PBK 2.5 GN

14379.1

100

Spacer plate SPC

Cat. no.

Qty.

SPC/PBK 2.5/2.5 mm GN

14419.1

100

SPC/PBK 2.5/2.5 mm GN

14419.1



100

Labelling

Refer to page 186.

Refer to page 186.

Push-in terminals

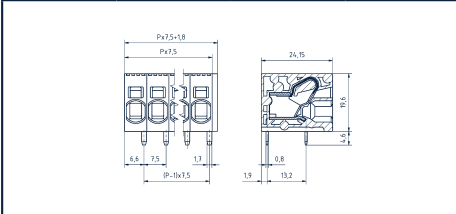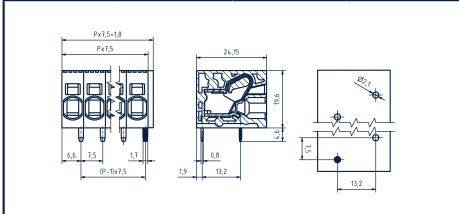Terminals	PBK 5/.../7.50-H	PBK 5/.../7.50-H-VP
		
Diagrams		
Connection type	Push-in	Push-in
Dimensions		
Pitch, mm	7.50	7.50
Stripping length, mm	15.00	15.00
Drill hole diameter, mm	2 x 1.10	2 x 1.10
Cross-section		
Solid (rigid) mm ²	0.20-10.00	0.20-10.00
Finely stranded (flexible) mm ²	0.20-6.00	0.20-6.00
Finely stranded (with wire-end ferrule) mm ²	0.25-6.00	0.25-6.00
Ratings	cULus 	cULus 
User group	B C D	B C D
Rated voltage (V)	300 300 300	600 600 600
Rated current (A)	35 35 10	35 35 5
Overvoltage category	III	III
Max. cross-section AWG / mm ²	24-8 24-8 24-8	24-8 24-8 24-8
Rated surge voltage (kV)	1.60 1.60 1.60	2.20 2.20 2.20
Contamination degree	3	3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Spring	Stainless steel	Stainless steel
Soldering lug	Copper alloy	Copper alloy
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information	No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
Standard colour(s)	● (RAL 6018)	● (RAL 6018)
Other colours on request.		
Terminal without end plate	1 14420.1 50	1 14440.1 50
Terminal with end plate	1 14421.1 50	1 14441.1 50
	2 14422.1 50	2 14442.1 50
	3 14423.1 50	3 14443.1 50
	4 14424.1 50	4 14444.1 50
	5 14425.1 50	5 14445.1 50
	6 14426.1 50	6 14446.1 50
	7 14427.1 50	7 14447.1 50
	8 14428.1 50	8 14448.1 50
	9 14429.1 50	9 14449.1 50
	10 14430.1 50	10 14450.1 50
	11 14431.1 50	11 14451.1 50
	12 14432.1 50	12 14452.1 50
Accessories		
End plate AP	AP/PBK 5 GN	AP/PBK 2.5 GN
Cat. no.	14459.1	14379.1
Qty.	100	100
Labelling	Refer to page 186.	Refer to page 186.


Terminals



PBK 5/.../11.50-H



Diagrams

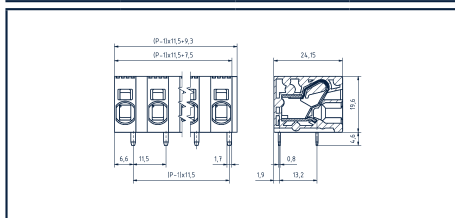

Connection type

Push-in

Dimensions

Pitch, mm

11.50

Stripping length, mm

15.00

Drill hole diameter, mm

2 x 1.10

Cross-section

Solid (rigid) mm²

0.20-10.00

Finely stranded (flexible) mm²

0.20-6.00

Finely stranded (with wire-end ferrule) mm²

0.25-6.00

Ratings

User group

cULus			
B	C	D	
600	600	600	1000
35	35	35	41
			III
24-8	24-8	24-8	0.20-6
2.20	2.20	2.20	3.50
			3

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Contamination degree

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Spring

Stainless steel

Soldering lug

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

Order information

Standard colour(s)

● (RAL 6018)

Other colours on request.

Terminal without end plate

Terminal with end plate

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
1	14490.1	50
1	14491.1	50
2	14492.1	50
3	14493.1	50
4	14494.1	50
5	14495.1	50
6	14496.1	50
7	14497.1	50
8	14498.1	50
9	14499.1	50
10	14500.1	50
11	14501.1	50
12	14502.1	50

Accessories

End plate AP

Cat. no.

Qty.

AP/PBK 5 GN

14459.1

100

Spacer plate SPC

Cat. no.

Qty.

SPC/PBK 5/2.5 mm GN


14509.1

100

Labelling

Refer to page 186.

PBK 4091 /.../KD-4.0-SMD


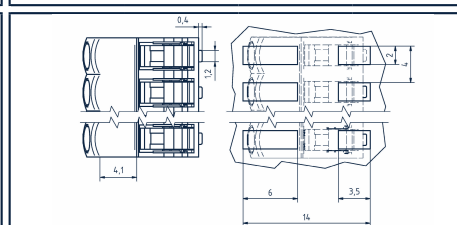


Connection type	Push-in			
Dimensions				
Pitch, mm	4.00			
Stripping length, mm	7.00			
Drill hole diameter, mm				
Cross-section				
Solid (rigid) mm²	0.20-0.75			
Finely stranded (flexible) mm²	0.20-0.75			
Finely stranded (with wire-end ferrule) mm²	0.14-0.34			
Ratings				
Overvoltage category	II	III	III	cULus*
Contamination degree	2	2	3	
Rated voltage (V)	320	160	63	
Rated voltage 1-pole (V)	600			
Rated voltage 2-pole (V)	250.00			
Rated current (A)	9	9	9	9
Max. cross-section AWG / mm²	0.20-0.75	0.20-0.75	0.20-0.75	24-18
Rated surge voltage (kV)	2.50	2.50	2.50	
Material				
Insulation material / Flammability class	PPA / UL 94 V-0			
Temperature range	-60 °C / +105 °C			
Metal	Copper alloy			
Reflow process				
Recommended soldering temperature	217-245 °C			
Recommended peak soldering time	60 s			
On tapes				
Coil diameter, inches	13			
Tape width, mm	24			
Pitch, mm (1/2-/3-/4-poles)	8/12/16/20			
Order information	No. of poles	Cat. no.	Qty.**	
Standard colour		○ (RAL 9003)		
	1	30741.7	1500	
	2	30742.7	1000	
	3	30743.7	750	
	4	30744.7	600	

Notes

A large rectangular area filled with a grid of small, light gray dotted lines, intended for handwritten notes.

Tension-spring terminals

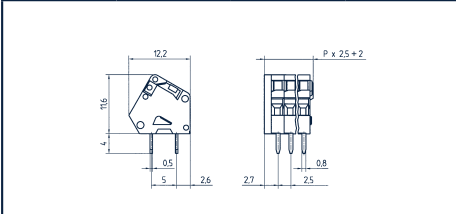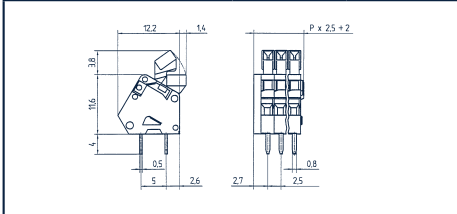Terminals	PZK 3191/.../2.50	PZK 3191/.../2.50-KD																																																																																																																																																						
																																																																																																																																																								
Diagrams																																																																																																																																																								
Connection type	Tension spring	Tension spring																																																																																																																																																						
Dimensions																																																																																																																																																								
Pitch, mm	2.50	2.50																																																																																																																																																						
Stripping length, mm	5.00	5.00																																																																																																																																																						
Drill hole diameter, mm	2 x 1.10	2 x 1.10																																																																																																																																																						
Cross-section																																																																																																																																																								
Solid (rigid) mm ²	0.08-1.00	0.08-1.00																																																																																																																																																						
Finely stranded (flexible) mm ²	0.14-0.50	0.14-0.50																																																																																																																																																						
Finely stranded (with wire-end ferrule) mm ²	0.14	0.14																																																																																																																																																						
Ratings																																																																																																																																																								
User group	B C D	B C D																																																																																																																																																						
Rated voltage (V)	150	150																																																																																																																																																						
Rated current (A)	4	4																																																																																																																																																						
Overvoltage category		III																																																																																																																																																						
Max. cross-section AWG / mm ²	28-20	28-20																																																																																																																																																						
Rated surge voltage (kV)	1.30	1.30																																																																																																																																																						
Torque NM / Screw size																																																																																																																																																								
Contamination degree		3																																																																																																																																																						
Material																																																																																																																																																								
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0																																																																																																																																																						
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C																																																																																																																																																						
Cage tension spring	Stainless steel	Stainless steel																																																																																																																																																						
Soldering lug	Copper alloy	Copper alloy																																																																																																																																																						
Wave soldering process																																																																																																																																																								
Recommended wave soldering temperature	260 °C	260 °C																																																																																																																																																						
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s																																																																																																																																																						
Order information	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 7032)</td><td></td></tr> <tr><td>2</td><td>12010.0</td><td>50</td></tr> <tr><td>3</td><td>12011.0</td><td>50</td></tr> <tr><td>4</td><td>12012.0</td><td>50</td></tr> <tr><td>5</td><td>12013.0</td><td>50</td></tr> <tr><td>6</td><td>12014.0</td><td>50</td></tr> <tr><td>7</td><td>12015.0</td><td>50</td></tr> <tr><td>8</td><td>12016.0</td><td>50</td></tr> <tr><td>9</td><td>12017.0</td><td>50</td></tr> <tr><td>10</td><td>12018.0</td><td>50</td></tr> <tr><td>11</td><td>12019.0</td><td>50</td></tr> <tr><td>12</td><td>12020.0</td><td>50</td></tr> <tr><td>13</td><td>12021.0</td><td>50</td></tr> <tr><td>14</td><td>12022.0</td><td>50</td></tr> <tr><td>15</td><td>12023.0</td><td>50</td></tr> <tr><td>16</td><td>12024.0</td><td>50</td></tr> <tr><td>17</td><td>12025.0</td><td>50</td></tr> <tr><td>18</td><td>12026.0</td><td>50</td></tr> <tr><td>19</td><td>12027.0</td><td>50</td></tr> <tr><td>20</td><td>12028.0</td><td>50</td></tr> <tr><td>21</td><td>12029.0</td><td>50</td></tr> <tr><td>22</td><td>12030.0</td><td>50</td></tr> <tr><td>23</td><td>12031.0</td><td>50</td></tr> <tr><td>24</td><td>12032.0</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 7032)		2	12010.0	50	3	12011.0	50	4	12012.0	50	5	12013.0	50	6	12014.0	50	7	12015.0	50	8	12016.0	50	9	12017.0	50	10	12018.0	50	11	12019.0	50	12	12020.0	50	13	12021.0	50	14	12022.0	50	15	12023.0	50	16	12024.0	50	17	12025.0	50	18	12026.0	50	19	12027.0	50	20	12028.0	50	21	12029.0	50	22	12030.0	50	23	12031.0	50	24	12032.0	50	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 7032)</td><td></td></tr> <tr><td>2</td><td>12057.0</td><td>50</td></tr> <tr><td>3</td><td>12058.0</td><td>50</td></tr> <tr><td>4</td><td>12059.0</td><td>50</td></tr> <tr><td>5</td><td>12060.0</td><td>50</td></tr> <tr><td>6</td><td>12061.0</td><td>50</td></tr> <tr><td>7</td><td>12062.0</td><td>50</td></tr> <tr><td>8</td><td>12063.0</td><td>50</td></tr> <tr><td>9</td><td>12064.0</td><td>50</td></tr> <tr><td>10</td><td>12065.0</td><td>50</td></tr> <tr><td>11</td><td>12066.0</td><td>50</td></tr> <tr><td>12</td><td>12067.0</td><td>50</td></tr> <tr><td>13</td><td>12068.0</td><td>50</td></tr> <tr><td>14</td><td>12069.0</td><td>50</td></tr> <tr><td>15</td><td>12070.0</td><td>50</td></tr> <tr><td>16</td><td>12071.0</td><td>50</td></tr> <tr><td>17</td><td>12072.0</td><td>50</td></tr> <tr><td>18</td><td>12073.0</td><td>50</td></tr> <tr><td>19</td><td>12074.0</td><td>50</td></tr> <tr><td>20</td><td>12075.0</td><td>50</td></tr> <tr><td>21</td><td>12076.0</td><td>50</td></tr> <tr><td>22</td><td>12077.0</td><td>50</td></tr> <tr><td>23</td><td>12078.0</td><td>50</td></tr> <tr><td>24</td><td>12079.0</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 7032)		2	12057.0	50	3	12058.0	50	4	12059.0	50	5	12060.0	50	6	12061.0	50	7	12062.0	50	8	12063.0	50	9	12064.0	50	10	12065.0	50	11	12066.0	50	12	12067.0	50	13	12068.0	50	14	12069.0	50	15	12070.0	50	16	12071.0	50	17	12072.0	50	18	12073.0	50	19	12074.0	50	20	12075.0	50	21	12076.0	50	22	12077.0	50	23	12078.0	50	24	12079.0	50
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 7032)																																																																																																																																																							
2	12010.0	50																																																																																																																																																						
3	12011.0	50																																																																																																																																																						
4	12012.0	50																																																																																																																																																						
5	12013.0	50																																																																																																																																																						
6	12014.0	50																																																																																																																																																						
7	12015.0	50																																																																																																																																																						
8	12016.0	50																																																																																																																																																						
9	12017.0	50																																																																																																																																																						
10	12018.0	50																																																																																																																																																						
11	12019.0	50																																																																																																																																																						
12	12020.0	50																																																																																																																																																						
13	12021.0	50																																																																																																																																																						
14	12022.0	50																																																																																																																																																						
15	12023.0	50																																																																																																																																																						
16	12024.0	50																																																																																																																																																						
17	12025.0	50																																																																																																																																																						
18	12026.0	50																																																																																																																																																						
19	12027.0	50																																																																																																																																																						
20	12028.0	50																																																																																																																																																						
21	12029.0	50																																																																																																																																																						
22	12030.0	50																																																																																																																																																						
23	12031.0	50																																																																																																																																																						
24	12032.0	50																																																																																																																																																						
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 7032)																																																																																																																																																							
2	12057.0	50																																																																																																																																																						
3	12058.0	50																																																																																																																																																						
4	12059.0	50																																																																																																																																																						
5	12060.0	50																																																																																																																																																						
6	12061.0	50																																																																																																																																																						
7	12062.0	50																																																																																																																																																						
8	12063.0	50																																																																																																																																																						
9	12064.0	50																																																																																																																																																						
10	12065.0	50																																																																																																																																																						
11	12066.0	50																																																																																																																																																						
12	12067.0	50																																																																																																																																																						
13	12068.0	50																																																																																																																																																						
14	12069.0	50																																																																																																																																																						
15	12070.0	50																																																																																																																																																						
16	12071.0	50																																																																																																																																																						
17	12072.0	50																																																																																																																																																						
18	12073.0	50																																																																																																																																																						
19	12074.0	50																																																																																																																																																						
20	12075.0	50																																																																																																																																																						
21	12076.0	50																																																																																																																																																						
22	12077.0	50																																																																																																																																																						
23	12078.0	50																																																																																																																																																						
24	12079.0	50																																																																																																																																																						
Accessories																																																																																																																																																								
Labelling	Refer to page 186.	Refer to page 186.																																																																																																																																																						

Terminals





PZK 3191/.../2.54



PZK 3191/.../2.54-KD



Diagrams

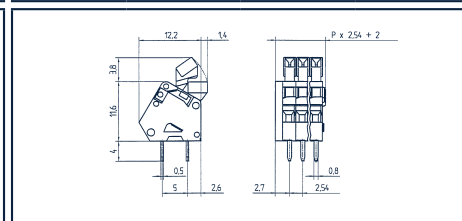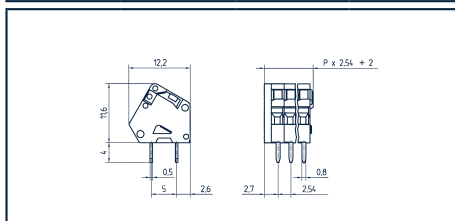

Connection type

Tension spring

Tension spring

Dimensions

Pitch, mm

2.54

2.54

Stripping length, mm

5.00

5.00

Drill hole diameter, mm

2 x 1.10

2 x 1.10

Cross-section

Solid (rigid) mm²

0.08-1.0

0.08-1.0

Finely stranded (flexible) mm²

0.14-0.5

0.14-0.5

Finely stranded (with wire-end ferrule) mm²

0.14

0.14

Ratings

User group

cULus

cULus

Rated voltage (V)

B 150

B 150

130

Rated current (A)

4

4

6

Overvoltage category

III

III

Max. cross-section AWG / mm²

28-20

28-20

0.50

Rated surge voltage (kV)

1.30

1.30

1.25

Torque NM / Screw size

1.25

1.25

Contamination degree

3

3

Material

Insulation material / Flammability class

PBT / UL 94 V-0

PBT / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Cage tension spring

Stainless steel

Stainless steel

Soldering lug

Copper alloy

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

3 / 4 s

Order information

Standard colour(s)

● (RAL 2011)

● (RAL 2011)

Other colours on request.

No. of poles	Cat. no.	Qty.
2	12106.3	50
3	12107.3	50
4	12108.3	50
5	12109.3	50
6	12110.3	50
7	12111.3	50
8	12112.3	50
9	12113.3	50
10	12114.3	50
11	12115.3	50
12	12116.3	50
13	12117.3	50
14	12118.3	50
15	12119.3	50
16	12120.3	50
17	12121.3	50
18	12122.3	50
19	12123.3	50
20	12124.3	50
21	12125.3	50
22	12126.3	50
23	12127.3	50
24	12128.3	50




No. of poles	Cat. no.	Qty.
2	12153.3	50
3	12154.3	50
4	12155.3	50
5	12156.3	50
6	12157.3	50
7	12158.3	50
8	12159.3	50
9	12160.3	50
10	12161.3	50
11	12162.3	50
12	12163.3	50
13	12164.3	50
14	12165.3	50
15	12166.3	50
16	12167.3	50
17	12168.3	50
18	12169.3	50
19	12170.3	50
20	12171.3	50
21	12172.3	50
22	12173.3	50
23	12174.3	50
24	12175.3	50

Accessories

Labelling

Refer to page 186.

Refer to page 186.

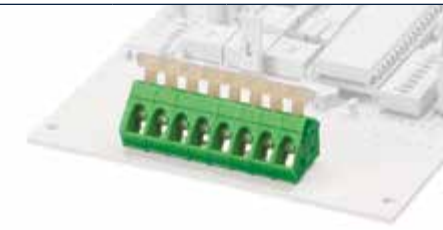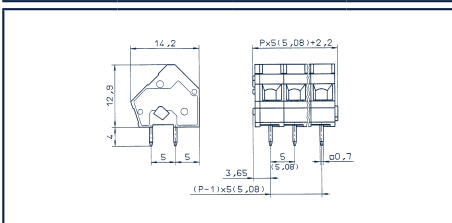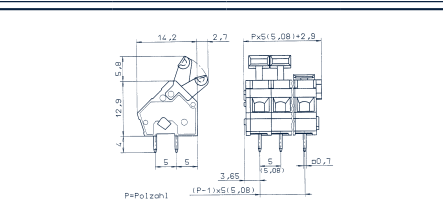Terminals		PZK 3000/.../5.00/5.08		PZK 3001/.../5.00/5.08-KD			
							
Diagrams							
Connection type		Tension spring		Tension spring			
Dimensions							
Pitch, mm		5.00/5.08		5.00/5.08			
Stripping length, mm		6.00		6.00			
Drill hole diameter, mm		2 x 1.10		2 x 1.10			
Cross-section							
Solid (rigid) mm²		0.08-2.50		0.08-2.50			
Finely stranded (flexible) mm²		0.14-2.50		0.14-2.50			
Finely stranded (with wire-end ferrule) mm²		0.14-1.50		0.14-1.50			
Ratings							
User group		cULus 		cULus 			
Rated voltage (V)		B 300	D 300	B 300	D 300		
Rated current (A)		15	10	15	10		
Overvoltage category		III		III			
Max. cross-section AWG / mm²		28-14	28-14	28-14	28-14		
Rated surge voltage (kV)		1.60	1.60	1.60	1.60		
Torque NM / Screw size							
Contamination degree		3		3			
Material							
Insulation material / Flammability class		PA 6.6 / UL 94 V-0		PA 6.6 / UL 94 V-0			
Temperature range		-40 °C / +105 °C		-40 °C / +105 °C			
Cage tension spring		Stainless steel		Stainless steel			
Soldering lug		Copper alloy		Copper alloy			
Wave soldering process							
Recommended wave soldering temperature		260 °C		260 °C			
Recommended wave soldering time, min. / max.		3 / 4 s		3 / 4 s			
Order information							
		No. of poles	Cat. no.  (RAL 6018)  (RAL 7032)	Qty.	No. of poles	Cat. no.  (RAL 6018)  (RAL 7032)	Qty.
		2	10690.1 10690.0	50	2	10786.1 10786.0	50
		3	10691.1 10691.0	50	3	10787.1 10787.0	50
		4	10692.1 10692.0	50	4	10788.1 10788.0	50
		5	10693.1 10693.0	50	5	10789.1 10789.0	50
		6	10694.1 10694.0	50	6	10790.1 10790.0	50
		7	10695.1 10695.0	50	7	10791.1 10791.0	50
		8	10696.1 10696.0	50	8	10792.1 10792.0	50
		9	10697.1 10697.0	50	9	10793.1 10793.0	50
		10	10698.1 10698.0	50	10	10794.1 10794.0	50
		11	10699.1 10699.0	50	11	10795.1 10795.0	50
		12	10700.1 10700.0	50	12	10796.1 10796.0	50
		13	10701.1 10701.0	50	13	10797.1 10797.0	50
		14	10702.1 10702.0	50	14	10798.1 10798.0	50
		15	10703.1 10703.0	50	15	10799.1 10799.0	50
		16	10704.1 10704.0	50	16	10800.1 10800.0	50
		17	10705.1 10705.0	50	17	10801.1 10801.0	50
		18	10706.1 10706.0	50	18	10802.1 10802.0	50
		19	10707.1 10707.0	50	19	10803.1 10803.0	50
		20	10708.1 10708.0	50	20	10804.1 10804.0	50
		21	10709.1 10709.0	50	21	10805.1 10805.0	50
		22	10710.1 10710.0	50	22	10806.1 10806.0	50
		23	10711.1 10711.0	50	23	10807.1 10807.0	50
		24	10712.1 10712.0	50	24	10808.1 10808.0	50
Accessories							
Labelling		Refer to page 186.		Refer to page 186.			

Tension-spring terminals

Terminals



Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Spring

Soldering lug

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.


Order information

No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7032)	
2	10834.1 10834.0	50
3	10835.1 10835.0	50
4	10836.1 10836.0	50
5	10837.1 10837.0	50
6	10838.1 10838.0	50
7	10839.1 10839.0	50
8	10840.1 10840.0	50
9	10841.1 10841.0	50
10	10842.1 10842.0	50
11	10843.1 10843.0	50
12	10844.1 10844.0	50
13	10845.1 10845.0	50
14	10846.1 10846.0	50
15	10847.1 10847.0	50
16	10848.1 10848.0	50
17	10849.1 10849.0	50
18	10850.1 10850.0	50
19	10851.1 10851.0	50
20	10852.1 10852.0	50
21	10853.1 10853.0	50
22	10854.1 10854.0	50
23	10855.1 10855.0	50
24	10856.1 10856.0	50

Accessories

Labelling

PZK 3001/.../5.00/5.08-FD

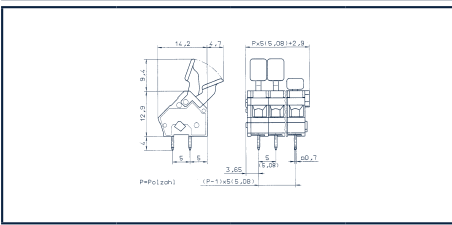

Tension spring

5.00/5.08

6.00

2 x 1.10

0.08-2.50

0.14-2.50

0.14-1.50

cULus




B	C	D	
300		300	250
15		10	24
			III
28-14		28-14	2.50
1.60		1.60	2.00
			3

260 °C

3 / 4 s

PZK 3001/.../5.00/5.08-WD

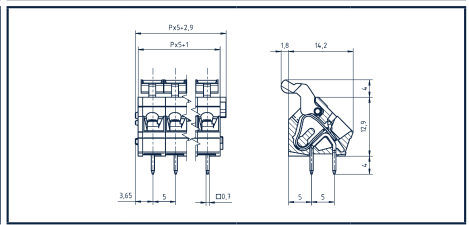

Clamping yoke

5.00/5.08

6.00

2 x 1.10

0.08-2.50

0.14-2.50

0.14-1.50

cULus



B	C	D	
300		300	250
15		10	24
			III
28-14		28-14	2.50
1.60		1.60	2.00
			3

260 °C

3 / 4 s

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	30772.1	50
3	30773.1	50
4	30774.1	50
5	30775.1	50
6	30776.1	50
7	30777.1	50
8	30778.1	50
9	30779.1	50
10	30780.1	50
11	30781.1	50
12	30782.1	50
13	30783.1	50
14	30784.1	50
15	30785.1	50
16	30786.1	50
17	30787.1	50
18	30788.1	50
19	30789.1	50
20	30790.1	50
21	30791.1	50
22	30792.1	50
23	30793.1	50
24	30794.1	50

Refer to page 186.

Terminals





PZK 3750/.../5.00



PZK 3750/.../5.00-VP



Diagrams

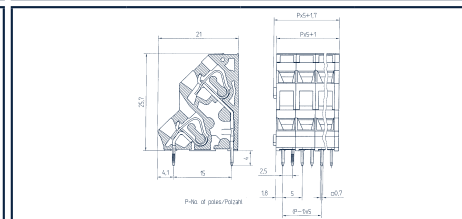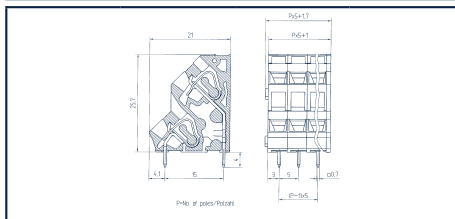

Connection type

Tension spring

Tension spring

Dimensions

Pitch, mm

5.00

5.00

Stripping length, mm

6.00

6.00

Drill hole diameter, mm

2 x 1.30

2 x 1.30

Cross-section

Solid (rigid) mm²

0.08-2.50

0.08-2.50

Finely stranded (flexible) mm²

0.14-2.50

0.14-2.50

Finely stranded (with wire-end ferrule) mm²

0.14-1.50

0.14-1.50

Ratings

User group

Rated voltage (V)

B
300C
16D
300

250

Rated current (A)

12

Overvoltage category

III

Max. cross-section AWG / mm²

28-14

28-14

2.50

Rated surge voltage (kV)

1.60

1.60

2.00

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Cage tension spring

Stainless steel

Stainless steel

Soldering lug

Copper alloy

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

3 / 4 s

Order information

No. of poles

Cat. no.

Qty.

2 ● (RAL 6018)

13334.1

50

3 13335.1

50

4 13336.1

50

5 13337.1

50

6 13338.1

50

7 13339.1

50

8 13340.1

50

9 13341.1

50

10 13342.1

50

11 13343.1

50

12 13344.1

50

13 13345.1

50

14 13346.1

50

15 13347.1

50

16 13348.1

50

17 13349.1

50

18 13350.1

50

19 13351.1

50

20 13352.1

50

21 13353.1

50

22 13354.1

50

23 13355.1

50

24 13356.1

50

1 pole = 2 electrical connections

No. of poles

Cat. no.

Qty.

2 ● (RAL 6018)

13382.1

50

3 13383.1

50

4 13384.1

50

5 13385.1

50

6 13386.1

50

7 13387.1

50

8 13388.1

50

9 13389.1

50

10 13390.1

50

11 13391.1

50

12 13392.1

50

13 13393.1

50

14 13394.1

50

15 13395.1

50

16 13396.1

50

17 13397.1

50

18 13398.1

50

19 13399.1

50

20 13400.1

50

21 13401.1

50

22 13402.1

50

23 13403.1

50

24 13404.1

50

1 pole = 2 electrical connections

Accessories

Labelling

Refer to page 186.

Refer to page 186.

PZK 3750/.../5.00-PD10.0



1 pole = 2 electrical connections

Terminals





PZK 3750/.../5.08



PZK 3750/.../5.08-VP



Diagrams

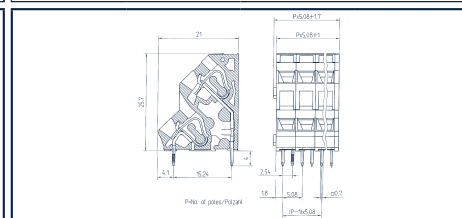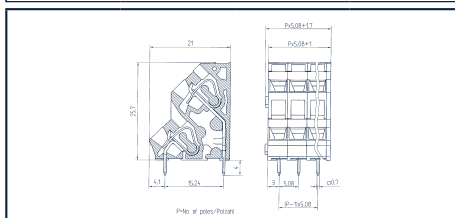

Connection type

Tension spring

Tension spring

Dimensions

Pitch, mm

5.08

5.08

Stripping length, mm

6.00

6.00

Drill hole diameter, mm

2 x 1.30

2 x 1.30

Cross-section

Solid (rigid) mm²

0.08-2.50

0.08-2.50

Finely stranded (flexible) mm²

0.14-2.50

0.14-2.50

Finely stranded (with wire-end ferrule) mm²

0.14-1.50

0.14-1.50

Ratings

User group

Rated voltage (V)

B
300C
300D
300

250

Rated current (A)

16

10

12

12

Overvoltage category

III

Max. cross-section AWG / mm²

28-14

28-14

2.50

Rated surge voltage (kV)

1.60

1.60

2.00

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Cage tension spring

Stainless steel

Stainless steel

Soldering lug

Copper alloy

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

3 / 4 s

Order information

No. of poles

Cat. no.

Qty.

2 ● (RAL 6018)

3 13358.1

4 13359.1

5 13360.1

6 13361.1

7 13362.1

8 13363.1

9 13364.1

10 13365.1

11 13366.1

12 13367.1

13 13368.1

14 13369.1

15 13370.1

16 13371.1

17 13372.1

18 13373.1

19 13374.1

20 13375.1

21 13376.1

22 13377.1

23 13378.1

24 13379.1

1 pole = 2 electrical connections

No. of poles

Cat. no.

Qty.

2 ● (RAL 6018)

3 13406.1

4 13407.1

5 13408.1

6 13409.1

7 13410.1

8 13411.1

9 13412.1

10 13413.1

11 13414.1

12 13415.1

13 13416.1

14 13417.1

15 13418.1

16 13419.1

17 13420.1

18 13421.1

19 13422.1

20 13423.1

21 13424.1

22 13425.1

23 13426.1

24 13427.1

1 pole = 2 electrical connections

Accessories

Labelling

Refer to page 186.


Refer to page 186.

PZK 3750/.../5.08-PD10.16



Accessories	
Labelling	Refer to page 186.


Terminals



7.50 mm

7.62 mm



PZK 3010/.../7.50/7.62

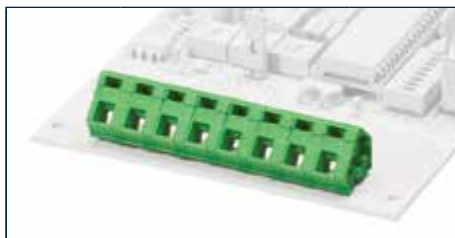

PZK 3011/.../7.50/7.62-KD



Diagrams

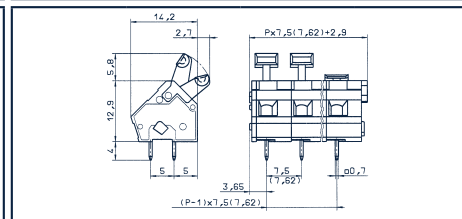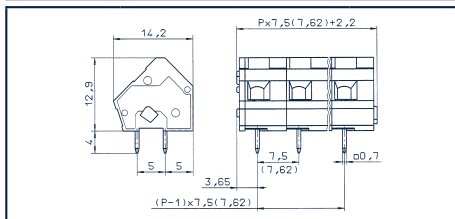

Connection type

Tension spring

Tension spring

Dimensions

Pitch, mm

7.50/7.62

7.50/7.62

Stripping length, mm

6.00

6.00

Drill hole diameter, mm

2 x 1.10

2 x 1.10

Cross-section

Solid (rigid) mm²

0.08-2.50

0.08-2.50

Finely stranded (flexible) mm²

0.14-2.50

0.14-2.50

Finely stranded (with wire-end ferrule) mm²

0.14-1.50

0.14-1.50

Ratings

User group

Rated voltage (V)

300

300

300

750

Rated current (A)

15

10

15

24

Overvoltage category

III

III

Max. cross-section AWG / mm²

28-14

28-14

28-14

2.50

Rated surge voltage (kV)

1.60

1.60

1.60

2.00

Contamination degree

3

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Cage tension spring

Stainless steel

Stainless steel

Soldering lug

Copper alloy

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

3 / 4 s

Order information

No. of poles Cat. no. Qty.

● (RAL 6018) ● (RAL 7032)

2 10738.1 10738.0 50

3 10739.1 10739.0 50

4 10740.1 10740.0 50

5 10741.1 10741.0 50

6 10742.1 10742.0 50

7 10743.1 10743.0 50

8 10744.1 10744.0 50

9 10745.1 10745.0 50

10 10746.1 10746.0 50

11 10747.1 10747.0 50

12 10748.1 10748.0 50

13 10749.1 10749.0 50

14 10750.1 10750.0 50

15 10751.1 10751.0 50

16 10752.1 10752.0 50

17 10753.1 10753.0 50

18 10754.1 10754.0 50

19 10755.1 10755.0 50

20 10756.1 10756.0 50

21 10757.1 10757.0 50

22 10758.1 10758.0 50

23 10759.1 10759.0 50

24 10760.1 10760.0 50

No. of poles Cat. no. Qty.

● (RAL 6018) ● (RAL 7032)

2 10882.1 10882.0 50

3 10883.1 10883.0 50

4 10884.1 10884.0 50

5 10885.1 10885.0 50

6 10886.1 10886.0 50

7 10887.1 10887.0 50

8 10888.1 10888.0 50

9 10889.1 10889.0 50

10 10890.1 10890.0 50

11 10891.1 10891.0 50

12 10892.1 10892.0 50

13 10893.1 10893.0 50

14 10894.1 10894.0 50

15 10895.1 10895.0 50

16 10896.1 10896.0 50

17 10897.1 10897.0 50

18 10898.1 10898.0 50

19 10899.1 10899.0 50

20 10900.1 10900.0 50

21 10901.1 10901.0 50

22 10902.1 10902.0 50

23 10903.1 10903.0 50

24 10904.1 10904.0 50

Accessories

Labelling

Refer to page 186.

Refer to page 186.


Terminals



10.00 mm

10.16 mm



PZK 3020/.../10.00/10.16

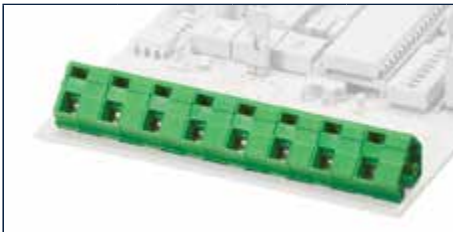

PZK 3021/.../10.00/10.16-KD



Diagrams

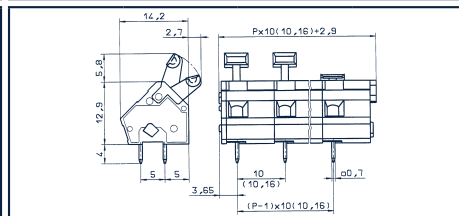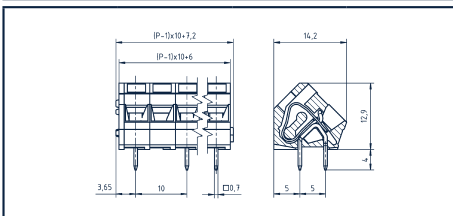

Connection type

Tension spring

Dimensions

Pitch, mm

10.00/10.16

Stripping length, mm

6.00

Drill hole diameter, mm

2 x 1.10

Cross-section

Solid (rigid) mm²

0.08-2.50

Finely stranded (flexible) mm²

0.14-2.50

Finely stranded (with wire-end ferrule) mm²

0.14-1.50

Ratings

User group

Rated voltage (V)

cULus			VDE
B	C	D	
300	300		1000
15	15		24

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Contamination degree

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Cage tension spring

Stainless steel

Soldering lug

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

Order information

No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7032)	
2	10978.1 10978.0	50
3	10979.1 10979.0	50
4	10980.1 10980.0	50
5	10981.1 10981.0	50
6	10982.1 10982.0	50
7	10983.1 10983.0	50
8	10984.1 10984.0	50
9	10985.1 10985.0	50
10	10986.1 10986.0	50
11	10987.1 10987.0	50
12	10988.1 10988.0	50
13	10989.1 10989.0	50
14	10990.1 10990.0	50
15	10991.1 10991.0	50
16	10992.1 10992.0	50
17	10993.1 10993.0	50
18	10994.1 10994.0	50
19	10995.1 10995.0	50
20	10996.1 10996.0	50
21	10997.1 10997.0	50
22	10998.1 10998.0	50
23	10999.1 10999.0	50
24	11000.1 11000.0	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7032)	
2	11026.1 11026.0	50
3	11027.1 11027.0	50
4	11028.1 11028.0	50
5	11029.1 11029.0	50
6	11030.1 11030.0	50
7	11031.1 11031.0	50
8	11032.1 11032.0	50
9	11033.1 11033.0	50
10	11034.1 11034.0	50
11	11035.1 11035.0	50
12	11036.1 11036.0	50
13	11037.1 11037.0	50
14	11038.1 11038.0	50
15	11039.1 11039.0	50
16	11040.1 11040.0	50
17	11041.1 11041.0	50
18	11042.1 11042.0	50
19	11043.1 11043.0	50
20	11044.1 11044.0	50
21	11045.1 11045.0	50
22	11046.1 11046.0	50
23	11047.1 11047.0	50
24	11048.1 11048.0	50

Accessories


Labelling

Refer to page 186.

Refer to page 186.

Tension-spring terminals


Terminals



PZK 3021/.../10.00/10.16-WD



Diagrams

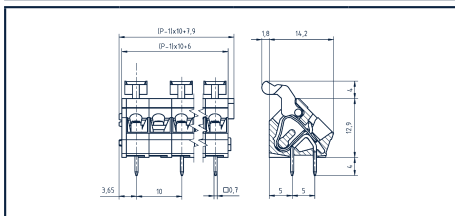

Connection type	Tension spring			
Dimensions				
Pitch, mm	10.00/10.16			
Stripping length, mm	6.00			
Drill hole diameter, mm	2 x 1.10			
Cross-section				
Solid (rigid) mm²	0.08-2.50			
Finely stranded (flexible) mm²	0.14-2.50			
Finely stranded (with wire-end ferrule) mm²	0.14-1.50			
Ratings				
User group				
Rated voltage (V)	B	C	D	
Rated current (A)	300	300		1000
Overvoltage category	15	15		24
Max. cross-section AWG / mm²				III
Rated surge voltage (kV)	28-14	28-14		2.50
Contamination degree	1.60	1.60		3.50
Material				
Insulation material / Flammability class	PA 6.6 / UL 94 V-0			
Temperature range	-40 °C / +105 °C			
Spring	Stainless steel			
Soldering lug	Copper alloy			
Wave soldering process				
Recommended wave soldering temperature	260 °C			
Recommended wave soldering time, min. / max.	3 / 4 s			
Order information	No. of poles	Cat. no.	Qty.	
		● (RAL 6018)		
	2	31302.1	50	
	3	31303.1	50	
	4	31304.1	50	
	5	31305.1	50	
	6	31306.1	50	
	7	31307.1	50	
	8	31308.1	50	
	9	31309.1	50	
	10	31310.1	50	
	11	31311.1	50	
	12	31312.1	50	
	13	31313.1	50	
	14	31314.1	50	
	15	31315.1	50	
	16	31316.1	50	
	17	31317.1	50	
	18	31318.1	50	
	19	31319.1	50	
	20	31320.1	50	
	21	31321.1	50	
	22	31322.1	50	
	23	31323.1	50	
	24	31324.1	50	

Notes

A large rectangular area filled with a uniform grid of small, light gray dotted lines, intended for handwritten notes.

Clamping yoke terminals

Terminals




2.54 mm

PKZ 692/.../2.54-V



Diagrams

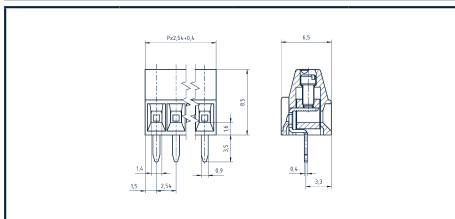


Wire connect type	Clamping yoke		
Dimensions			
Pitch, mm	2.54		
Stripping length, mm	4.00		
Drill hole diameter, mm	1.30		
Cross-section			
Solid (rigid) mm ²	0.14-0.75		
Finely stranded (flexible) mm ²	0.14-0.75		
Finely stranded (with wire-end ferrule) mm ²	0.14-0.34		
Ratings			
User group			
Rated voltage (V)	B	C	D
Rated current (A)	150		130
Overvoltage category	7		9
Max. cross-section AWG / mm ²			III
Rated surge voltage (kV)	30-18		0.75
Torque NM / Screw size	1.30		1.25
Contamination degree	0.1/M 1.6		0.1/M 1.6
Material			
Insulation material / Flammability class	PA 6.6 / UL 94 V-0		
Temperature range	-40 °C / +105 °C		
Clamping element	Brass		
Screw	Steel		
Soldering lug	Brass		
Wave soldering process			
Recommended wave soldering temperature	260 °C		
Recommended wave soldering time, min. / max.	3 / 4 s		
Order information	No. of poles	Cat. no.	Qty.
		● (RAL 6018)	
	2	14100.1	50
	3	14101.1	50
	4	14102.1	50
	5	14103.1	50
	6	14104.1	50
	7	14105.1	50
	8	14106.1	50
	9	14107.1	50
	10	14108.1	50
	11	14109.1	50
	12	14110.1	50
	13	14111.1	50
	14	14112.1	50
	15	14113.1	50
	16	14114.1	50
	17	14115.1	50
	18	14117.1	50
	19	14118.1	50
	20	14119.1	50
	21	14120.1	50
	22	14121.1	50
	23	14122.1	50
	24	14116.1	50
Accessories			
Labelling	Refer to page 186.		

PK 601/.../3.50-V





Diagrams

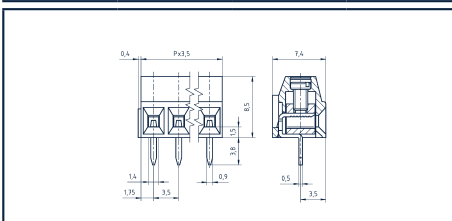

Wire connect type	Clamping yoke		
Dimensions			
Pitch, mm	3.50		
Stripping length, mm	6.00		
Drill hole diameter, mm	1.20		
Cross-section			
Solid (rigid) mm²	0.08-1.50		
Finely stranded (flexible) mm²	0.08-1.00		
Finely stranded (with wire-end ferrule) mm²	0.14-0.34		
Ratings			
User group	B	C	D
Rated voltage (V)	150		160
Rated current (A)	10		10
Overvoltage category			III
Max. cross-section AWG / mm²	28-16		1.00
Rated surge voltage (kV)	1.30		1.25
Torque NM / Screw size	0.2/M 2		0.2/M 2
Contamination degree			3
Material			
Insulation material / Flammability class	PA 6.6 / UL 94 V-0		
Temperature range	-40 °C / +105 °C		
Clamping element	Brass		
Screw	Steel		
Soldering lug	Brass		
Wave soldering process			
Recommended wave soldering temperature	260 °C		
Recommended wave soldering time, min. / max.	3 / 4 s		
Order information	No. of poles	Cat. no.	Qty.
		● (RAL 6018)	
	2	14123.1	50
	3	14124.1	50
	4	14125.1	50
	5	14126.1	50
	6	14127.1	50
	7	14128.1	50
	8	14129.1	50
	9	14130.1	50
	10	14131.1	50
	11	14132.1	50
	12	14133.1	50
	13	14134.1	50
	14	14135.1	50
	15	14136.1	50
	16	14137.1	50
	17	14138.1	50
	18	14139.1	50
	19	14140.1	50
	20	14141.1	50
	21	14142.1	50
	22	14143.1	50
	23	14144.1	50
	24	14145.1	50
Accessories			
Labelling	Refer to page 186.		

Clamping yoke terminals

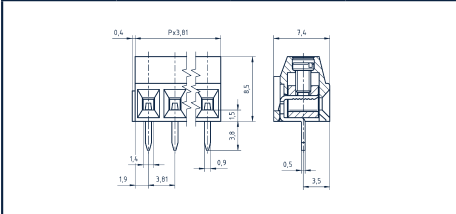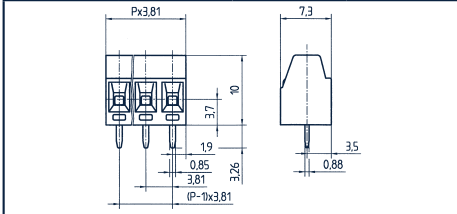Terminals	PKZ 601/.../3.81-V	PKZ 602/.../3.81-V
		
Diagrams		
Wire connect type	Clamping yoke	Clamping yoke
Dimensions		
Pitch, mm	3.81	3.81
Stripping length, mm	6.00	5.00
Drill hole diameter, mm	1.20	1.10
Cross-section		
Solid (rigid) mm ²	0.08-1.50	0.14-1.50
Finely stranded (flexible) mm ²	0.08-1.00	0.14-1.00
Finely stranded (with wire-end ferrule) mm ²	0.14-0.34	0.25-0.50
Ratings		
User group	cULus*	cULus
Rated voltage (V)	B 150	B 300
Rated current (A)	C 10	C 10
Overvoltage category	D III	D III
Max. cross-section AWG / mm ²	28-16	30-16
Rated surge voltage (kV)	1.30	1.60
Torque NM / Screw size	0.2/M 2	0.25/M 2
Contamination degree	3	3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Clamping element	Brass	Brass
Screw	Steel	Bronze
Soldering lug	Brass	Copper alloy
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information	No. of poles	No. of poles
	Cat. no.	Cat. no.
	● (RAL 6018)	● (RAL 6018)
	Qty.	Qty.
	2 31452.1 50	2 12878.1 50
	3 31453.1 50	3 12879.1 50
	4 31454.1 50	4 12880.1 50
	5 31455.1 50	5 12881.1 50
	6 31456.1 50	6 12882.1 50
	7 31457.1 50	7 12883.1 50
	8 31458.1 50	8 12884.1 50
	9 31459.1 50	9 12885.1 50
	10 31460.1 50	10 12886.1 50
	11 31461.1 50	11 12887.1 50
	12 31462.1 50	12 12888.1 50
	13 31463.1 50	13 12889.1 50
	14 31464.1 50	14 12890.1 50
	15 31465.1 50	15 12891.1 50
	16 31466.1 50	16 12892.1 50
	17 31467.1 50	
	18 31468.1 50	
	19 31469.1 50	
	20 31470.1 50	
	21 31471.1 50	
	22 31472.1 50	
	23 31473.1 50	
	24 31474.1 50	
Accessories		
Labelling	Refer to page 186.	Refer to page 186.

* Approvals applied for

Terminals



5.00 mm



PK 300/.../5.00



PK 2.5/.../5.00



Diagrams

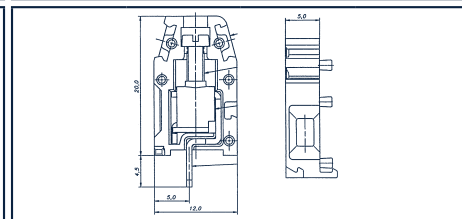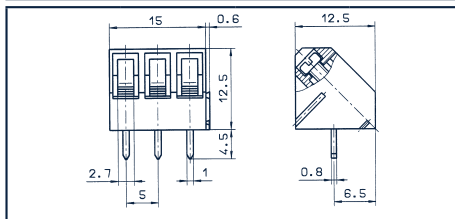

Wire connect type

Clamping yoke

Dimensions

Pitch, mm

5.00

Stripping length, mm

7.00

Drill hole diameter, mm

1.30

Cross-section

Solid (rigid) mm²

0.14-2.50

Finely stranded (flexible) mm²

0.14-1.50

Finely stranded (with wire-end ferrule) mm²

0.25-1.50

Ratings

User group

Rated voltage (V)

B	C	D	
300		300	250
15		10	24

Rated current (A)

			III
--	--	--	-----

Overvoltage category

Max. cross-section AWG / mm²

22-12		22-12	2.50
-------	--	-------	------

Rated surge voltage (kV)

1.60		1.60	2.00
------	--	------	------

Torque NM / Screw size

0.4/M 2.6		0.4/M 2.6	0.4/M 2.6
-----------	--	-----------	-----------

Contamination degree

			3
--	--	--	---

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Clamping element

Brass

Screw

Steel

Soldering lug

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

Order information

No. of poles	Cat. no.		Qty.
	● (RAL 6018)	● (RAL 7016)	
2	10313.1	10313.4	50
3	10314.1	10314.4	50
4	10315.1	10315.4	50
5	10316.1	10316.4	50
6	10317.1	10317.4	50
7	10318.1	10318.4	50
8	10319.1	10319.4	50
9	10320.1	10320.4	50
10	10321.1	10321.4	50
11	10322.1	10322.4	50
12	10323.1	10323.4	50
13	12553.1	12553.4	50
14	12554.1	12554.4	50
15	12555.1	12555.4	50
16	12556.1	12556.4	50
17	12557.1	12557.4	50
18	12558.1	12558.4	50
19	12559.1	12559.4	50
20	12560.1	12560.4	50
21	12561.1	12561.4	50
22	12562.1	12562.4	50
23	12563.1	12563.4	50
24	12564.1	12564.4	50

No. of poles	Cat. no.		Qty.
	● (RAL 6018)	● (RAL 2011)	
2	5002.1	5002.3	50
3	5003.1	5003.3	50
4	5004.1	5004.3	50
5	5005.1	5005.3	50
6	5006.1	5006.3	50
7	5007.1	5007.3	50
8	5008.1	5008.3	50
9	5009.1	5009.3	50
10	5010.1	5010.3	50
11	5011.1	5011.3	50
12	5012.1	5012.3	50
13	5013.1	5013.3	50
14	5014.1	5014.3	50
15	5015.1	5015.3	50
16	5016.1	5016.3	50
17	5017.1	5017.3	50
18	5018.1	5018.3	50
19	5019.1	5019.3	50
20	5020.1	5020.3	50
21	5021.1	5021.3	50
22	5022.1	5022.3	50
23	5023.1	5023.3	50
24	5024.1	5024.3	50

Accessories

Labelling

Refer to page 186.

Refer to page 186.


Clamping yoke terminals

Terminals




5.00 mm

PK 350/.../5.00-V

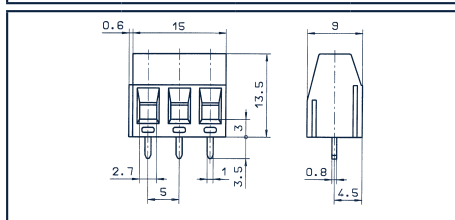

PK 350/.../5.00-V-BR

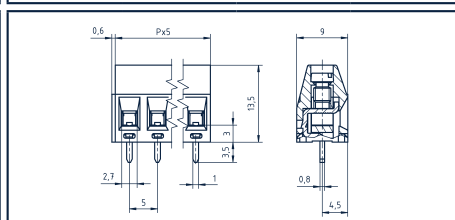

Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Soldering lug

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

Clamping yoke

5.00

6.00

1.30

0.14-2.50

0.14-1.50

0.14-1.50

cULus



B

C

D

B

C

D

D

300

150

150

300

15

300

250

15

15

10

15

10

10

24

III

III

22-12

22-12

22-12

22-12

22-12

22-12

1.50

1.60

1.30

1.30

1.60

1.60

1.60

2.00

0.5 / M 3

0.5 / M 3

0.5 / M 3

0.5/M 3

0.5/M 3

0.5/M 3

0.5/M 3

3

3

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Soldering lug

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

10357.1

50

3

10358.1

50

4

10359.1

50

5

10360.1

50

6

10361.1

50

7

10362.1

50

8

10363.1

50

9

10364.1

50

10

10365.1

50

11

10366.1

50

12

10367.1

50

13

12349.1

50

14

12350.1

50

15

12351.1

50

16

12352.1

50

17

12353.1

50

18

12354.1

50

19

12355.1

50

20

12356.1

50

21

12357.1

50

22

12358.1

50

23

12359.1

50

24

12360.1

50

Accessories

Labelling

Refer to page 186.


Refer to page 186.

Terminals




5.00 mm

PK 700/.../5.00-V

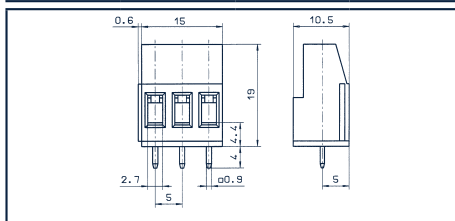

PK 700/.../5.00-H

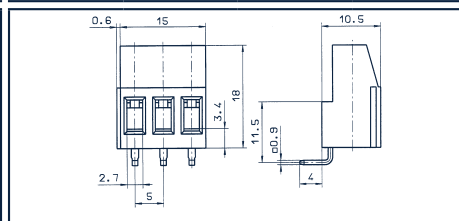

Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Soldering lug

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

Clamping yoke

5.00

8.00

1.30

0.20-4.00

0.20-2.50

0.25-2.50

cULus



B

C

D

250

300

150

300

24

20

20

10

III

30-12

30-12

22-12

2.50

1.60

1.30

1.60

2.00

0.45 / M 3

0.45 / M 3

0.45 / M 3

0.5 / M 3

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Copper alloy

260 °C

3 / 4 s

Clamping yoke

5.00

8.00

1.30

0.20-4.00

0.20-2.50

0.25-2.50

cULus



B

C

D

250

300

150

300

24

15

20

10

III

30-12

30-12

22-12

2.50

1.60

1.30

1.60

2.00

0.45 / M 3

0.45 / M 3

0.45 / M 3

0.5 / M 3

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Copper alloy

260 °C

3 / 4 s

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10423.1

10423.4

50

3

10424.1

10424.4

50

4

10425.1

10425.4

50

5

10426.1

10426.4

50

6

10427.1

10427.4

50

7

10428.1

10428.4

50

8

10429.1

10429.4

50

9

10430.1

10430.4

50

10

10431.1

10431.4

50

11

10432.1

10432.4

50

12

10433.1

10433.4

50

13

12609.1

12609.4

50

14

12610.1

12610.4

50

15

12611.1

12611.4

50

16

12612.1

12612.4

50

17

12613.1

12613.4

50

18

12614.1

12614.4

50

19

12615.1

12615.4

50

20

12616.1

12616.4

50

21

12617.1

12617.4

50

22

12618.1

12618.4

50

23

12619.1

12619.4

50

24

12620.1

12620.4

50

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10445.1

10445.4

50

3

10446.1

10446.4

50

4

10447.1

10447.4

50

5

10448.1

10448.4

50

6

10449.1

10449.4

50

7

10450.1

10450.4

50

8

10451.1

10451.4

50

9

10452.1

10452.4

50

10

10453.1

10453.4

50

11

10454.1

10454.4

50

12

10455.1

10455.4

50

13

12633.1

12633.4

50

14

12634.1

12634.4

50

15

12635.1

12635.4

50

16

12636.1

12636.4

50

17

12637.1

12637.4

50

18

12638.1

12638.4

50

19

12639.1

12639.4

50

20

12640.1

12640.4

50

21

12641.1

12641.4

50

22

12642.1

12642.4

50

23

12643.1

12643.4

50

24

12644.1

12644.4

50

Accessories

Screw cover

Cat. no.

Labelling

Qty.

AD/PK YE

13283.8

100

Refer to page 186.

AD/PK YE

13283.8


100

Refer to page 186.

PK 700/3/5.00-V-BR



Diagrams

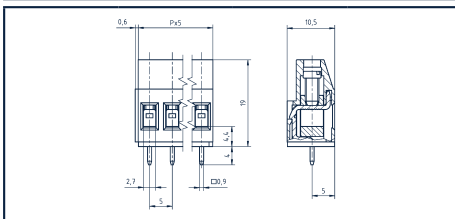

* Approvals applied for

Terminals



5.00 mm



PKD 370/.../5.00-V



PKD 750/.../5.00-V



Diagrams

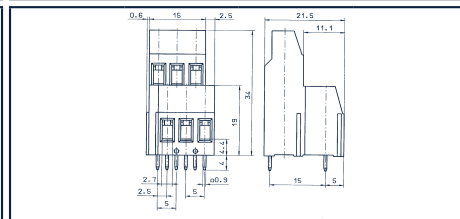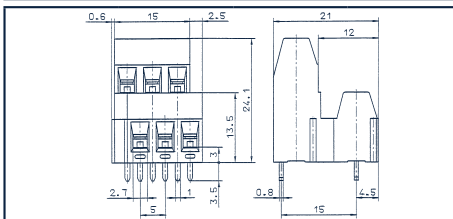

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Soldering lug

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7016)	
2	10412.1 10412.4	50
3	10413.1 10413.4	50
4	10414.1 10414.4	50
5	10415.1 10415.4	50
6	10416.1 10416.4	50
7	10417.1 10417.4	50
8	10418.1 10418.4	50
9	10419.1 10419.4	50
10	10420.1 10420.4	50
11	10421.1 10421.4	50
12	10422.1 10422.4	50
13	12589.1 12589.4	50
14	12590.1 12590.4	50
15	12591.1 12591.4	50
16	12592.1 12592.4	50
17	12593.1 12593.4	50
18	12594.1 12594.4	50
19	12595.1 12595.4	50
20	12596.1 12596.4	50
21	12597.1 12597.4	50
22	12598.1 12598.4	50
23	12599.1 12599.4	50
24	12600.1 12600.4	50

Clamping yoke

5.00

6.00

1.30

cULus



B	C	D	
300	150	300	250
15	15	10	17.5
			III
22-12	22-12	22-12	1.50
1.60	1.30	1.60	2.00
0.5 / M 3	0.5 / M 3	0.5 / M 3	0.5/M 3
			3

260 °C

3 / 4 s

Accessories

Screw cover

Cat. no.

Labelling

Qty.

Refer to page 186.

Clamping yoke

5.00

8.00

1.30

cULus



B	C	D	
300	150	300	250
20	20	10	24
			III
30-12	30-12	30-12	2.50
1.60	1.30	1.60	2.00
0.45 / M 3	0.45 / M 3	0.45 / M 3	0.5/M 3
			3

260 °C

3 / 4 s

No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7016)	
2	10489.1 10489.4	50
3	10490.1 10490.4	50
4	10491.1 10491.4	50
5	10492.1 10492.4	50
6	10493.1 10493.4	50
7	10494.1 10494.4	50
8	10495.1 10495.4	50
9	10496.1 10496.4	50
10	10497.1 10497.4	50
11	10498.1 10498.4	50
12	10499.1 10499.4	50
13	12681.1 12681.4	50
14	12682.1 12682.4	50
15	12683.1 12683.4	50
16	12684.1 12684.4	50
17	12685.1 12685.4	50
18	12686.1 12686.4	50
19	12687.1 12687.4	50
20	12688.1 12688.4	50
21	12689.1 12689.4	50
22	12690.1 12690.4	50
23	12691.1 12691.4	50
24	12692.1 12692.4	50

1 pole = 2 electrical connections

AD/PK YE

13283.8




100

Refer to page 186.

Technical drawing of a 2x4 stud wall section showing two views: a front elevation and a side elevation. The front elevation shows a wall with two rows of studs, each with a 2x4 stud and a 1/2 inch gap. The side elevation shows the profile of the wall with a total height of 217 and a base width of 10.8. Dimensions are given in inches.

Refer to page 186.

Refer to page 186.

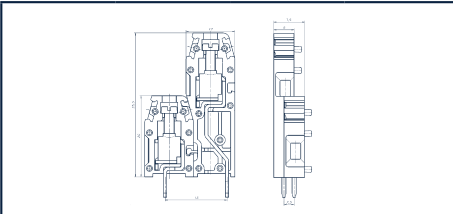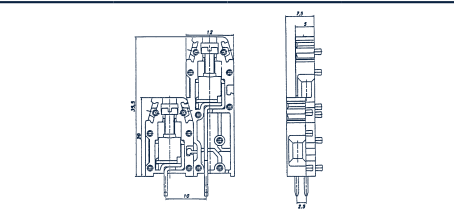Terminals	PKDL 2.5/.../5.00	PKDR 2.5/.../5.00
 		
Diagrams		
Wire connect type	Clamping yoke	Clamping yoke
Dimensions		
Pitch, mm	5.00	5.00
Stripping length, mm	7.00	7.00
Drill hole diameter, mm	1.30	1.30
Cross-section		
Solid (rigid) mm ²	0.20-4.00	0.20-4.00
Finely stranded (flexible) mm ²	0.20-2.50	0.20-2.50
Finely stranded (with wire-end ferrule) mm ²	0.20-2.50	0.20-2.50
Ratings		
User group		
Rated voltage (V)	300	300
Rated current (A)	20	20
Overvoltage category	III	III
Max. cross-section AWG / mm ²	24-14	24-14
Rated surge voltage (kV)	4.00	1.60
Torque NM / Screw size	0.6/M 2.5	0.6/M 2.5
Contamination degree	3	3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-2	PA 6.6 / UL 94 V-2
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Clamping element	Steel	Steel
Screw	Steel	Steel
Soldering lug	Copper	Copper
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information		
No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2		
3		
4	5204.1	50
5		
6	5206.1	50
7		
8	5208.1	50
9		
10	5210.1	50
11		
12	5212.1	50
13		
14	5214.1	50
15		
16	5216.1	50
17		
18	5218.1	50
19		
20	5220.1	50
21		
22	5222.1	50
23		
24	5224.1	50
Accessories		
Labelling	Refer to page 186.	Refer to page 186.

* Approvals applied for


Clamping yoke terminals

Terminals




5.08 mm

PK 250/.../5.08-V

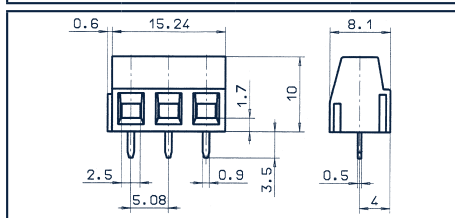

PK 300/.../5.08

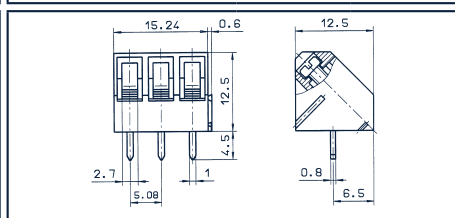

Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Soldering lug

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

Order information	No. of poles	Cat. no.		Qty.	No. of poles	Cat. no.		Qty.
		● (RAL 6018)	● (RAL 7016)			● (RAL 6018)	● (RAL 7016)	
	2	10291.1	10291.4	50	2	10324.1	10324.4	50
	3	10292.1	10292.4	50	3	10325.1	10325.4	50
	4	10293.1	10293.4	50	4	10326.1	10326.4	50
	5	10294.1	10294.4	50	5	10327.1	10327.4	50
	6	10295.1	10295.4	50	6	10328.1	10328.4	50
	7	10296.1	10296.4	50	7	10329.1	10329.4	50
	8	10297.1	10297.4	50	8	10330.1	10330.4	50
	9	10298.1	10298.4	50	9	10331.1	10331.4	50
	10	10299.1	10299.4	50	10	10332.1	10332.4	50
	11	10300.1	10300.4	50	11	10333.1	10333.4	50
	12	10301.1	10301.4	50	12	10334.1	10334.4	50
	13	12541.1	12541.4	50	13	12565.1	12565.4	50
	14	12542.1	12542.4	50	14	12566.1	12566.4	50
	15	12543.1	12543.4	50	15	12567.1	12567.4	50
	16	12544.1	12544.4	50	16	12568.1	12568.4	50
	17	12545.1	12545.4	50	17	12569.1	12569.4	50
	18	12546.1	12546.4	50	18	12570.1	12570.4	50
	19	12547.1	12547.4	50	19	12571.1	12571.4	50
	20	12548.1	12548.4	50	20	12572.1	12572.4	50
	21	12549.1	12549.4	50	21	12573.1	12573.4	50
	22	12550.1	12550.4	50	22	12574.1	12574.4	50
	23	12551.1	12551.4	50	23	12575.1	12575.4	50
	24	12552.1	12552.4	50	24	12576.1	12576.4	50

Accessories

Labelling

Refer to page 186.

Refer to page 186.

Terminals



5.08 mm



PK 350/.../5.08-V



PK 2.5/.../5.08



Diagrams

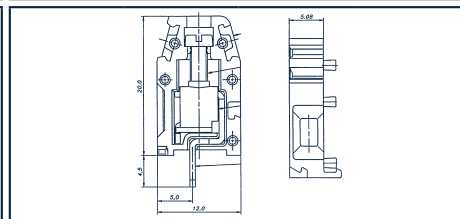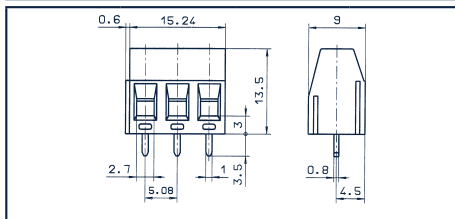

Wire connect type

Clamping yoke

Clamping yoke

Dimensions

Pitch, mm

5.08

5.08

Stripping length, mm

6.00

7.00

Drill hole diameter, mm

1.30

1.30

Cross-section

Solid (rigid) mm²

0.20-2.50

0.20-4.00

Finely stranded (flexible) mm²

0.20-1.50

0.20-2.50

Finely stranded (with wire-end ferrule) mm²

0.20-1.50

0.25-2.50

Ratings

User group

Rated voltage (V)

B	C	D	
300	150	300	250

B	C	D	
300			250

Rated current (A)

15	15	10	17.5
----	----	----	------

20			16
----	--	--	----

Overvoltage category

III

III

Max. cross-section AWG / mm²

22-12	22-12	22-12	1.50
-------	-------	-------	------

24-14			2.50
-------	--	--	------

Rated surge voltage (kV)

1.60	1.30	1.60	2.00
------	------	------	------

			4.00
--	--	--	------

Torque NM / Screw size

0.5 / M 3	0.5 / M 3	0.5 / M 3	0.5/M 3
-----------	-----------	-----------	---------

0.6/M 2.5			0.6/M 2.5
-----------	--	--	-----------

Contamination degree

3

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-2

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Clamping element

Brass

Steel

Screw

Steel

Steel

Soldering lug

Brass

Copper

Wave soldering process

Recommended wave soldering temperature

260 °C

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

3 / 4 s

Order information

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	10368.1	50
3	10369.1	50
4	10370.1	50
5	10371.1	50
6	10372.1	50
7	10373.1	50
8	10374.1	50
9	10375.1	50
10	10376.1	50
11	10377.1	50
12	10378.1	50
13	12361.1	50
14	12362.1	50
15	12363.1	50
16	12364.1	50
17	12365.1	50
18	12366.1	50
19	12367.1	50
20	12368.1	50
21	12369.1	50
22	12370.1	50
23	12371.1	50
24	12372.1	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 2011)	
2	5102.1 5102.3	50
3	5103.1 5103.3	50
4	5104.1 5104.3	50
5	5105.1 5105.3	50
6	5106.1 5106.3	50
7	5107.1 5107.3	50
8	5108.1 5108.3	50
9	5109.1 5109.3	50
10	5110.1 5110.3	50
11	5111.1 5111.3	50
12	5112.1 5112.3	50
13	5113.1 5113.3	50
14	5114.1 5114.3	50
15	5115.1 5115.3	50
16	5116.1 5116.3	50
17	5117.1 5117.3	50
18	5118.1 5118.3	50
19	5119.1 5119.3	50
20	5120.1 5120.3	50
21	5121.1 5121.3	50
22	5122.1 5122.3	50
23	5123.1 5123.3	50
24	5124.1 5124.3	50

Accessories

Labelling

Refer to page 186.

Refer to page 186.

Terminals



5.08 mm



PKD 750/.../5.08-V



PKDL 2.5/.../5.08



Diagrams

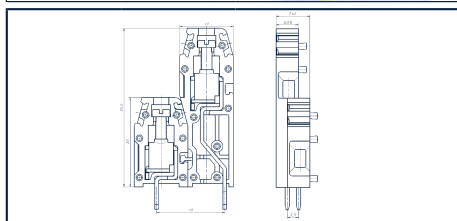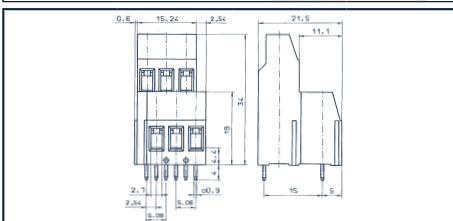

Wire connect type

Clamping yoke

Clamping yoke

Dimensions

Pitch, mm

5.08

5.08

Stripping length, mm

8.00

7.00

Drill hole diameter, mm

1.30

1.30

Cross-section

Solid (rigid) mm²

0.20-4.00

0.20-4.00

Finely stranded (flexible) mm²

0.20-2.50

0.20-2.50

Finely stranded (with wire-end ferrule) mm²

0.25-2.50

0.25-2.50

Ratings

User group

Rated voltage (V)

cULus				
B	C	D		
300	150	300		250
20	20	10		24

cULus*				
B	C	D		
300				250
20				13

Rated current (A)

Overvoltage category

III

III

Max. cross-section AWG / mm²

30-12 30-12 30-12 2.50

24-14 2.50

Rated surge voltage (kV)

1.60 1.30 1.60 2.00

4.00

Torque NM / Screw size

0.45 / M 3 0.45 / M 3 0.45 / M 3 0.5/M 3

0.6/M 2.5 0.6/M 2.5

Contamination degree

3

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-2

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Clamping element

Brass

Steel

Screw

Steel

Steel

Soldering lug

Copper alloy

Copper

Wave soldering process

Recommended wave soldering temperature

260 °C

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

3 / 4 s

Order information

No. of poles	Cat. no.		Qty.
	● (RAL 6018) ● (RAL 7016)		
2	10500.1	10500.4	50
3	10501.1	10501.4	50
4	10502.1	10502.4	50
5	10503.1	10503.4	50
6	10504.1	10504.4	50
7	10505.1	10505.4	50
8	10506.1	10506.4	50
9	10507.1	10507.4	50
10	10508.1	10508.4	50
11	10509.1	10509.4	50
12	10510.1	10510.4	50
13	12789.1	12789.4	50
14	12790.1	12790.4	50
15	12791.1	12791.4	50
16	12792.1	12792.4	50
17	12793.1	12793.4	50
18	12794.1	12794.4	50
19	12795.1	12795.4	50
20	12796.1	12796.4	50
21	12797.1	12797.4	50
22	12798.1	12798.4	50
23	12799.1	12799.4	50
24	12800.1	12800.4	50

1 pole = 2 electrical connections

No. of poles	Cat. no.		Qty.
	● (RAL 6018)		
2			
3			
4	5304.1		50
5			
6	5306.1		50
7			
8	5308.1		50
9			
10	5310.1		50
11			
12	5312.1		50
13			
14	5314.1		50
15			
16	5316.1		50
17			
18	5318.1		50
19			
20	5320.1		50
21			
22	5322.1		50
23			
24	5324.1		50

Accessories

Screw cover

Cat. no.

Qty.

Labelling

AD/PK YE



13283.8

100

Refer to page 186.

Refer to page 186.

Clamping yoke terminals

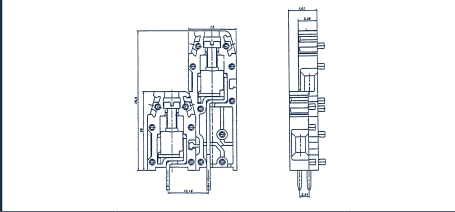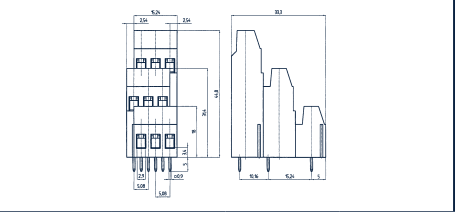Terminals	PKDR 2.5/.../5.08	PKDZ 770/.../5.08-V
		
Diagrams		
Wire connect type	Clamping yoke	Clamping yoke
Dimensions		
Pitch, mm	5.08	5.08
Stripping length, mm	7.00	8.00
Drill hole diameter, mm	1.30	1.30
Cross-section		
Solid (rigid) mm ²	0.20-4.00	0.20-4.00
Finely stranded (flexible) mm ²	0.20-2.50	0.20-2.50
Finely stranded (with wire-end ferrule) mm ²	0.25-2.50	0.25-2.50
Ratings		
User group	B C D	B C D
Rated voltage (V)	300	300
Rated current (A)	20	20
Overvoltage category		
Max. cross-section AWG / mm ²	24-14	30-12
Rated surge voltage (kV)		
Torque NM / Screw size	0.6/M 2.5	0.45 / M 3
Contamination degree		
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-2	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Clamping element	Steel	Brass
Screw	Steel	Steel
Soldering lug	Copper	Copper alloy
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information	No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
	● (RAL 2011)	● (RAL 6018)
	2 5304.3 50	2 12924.1 50
	3 5306.3 50	3 12925.1 50
	4 5308.3 50	4 12926.1 50
	5 5310.3 50	5 12927.1 50
	6 5312.3 50	6 12928.1 50
	7 5314.3 50	7 12929.1 50
	8 5316.3 50	8 12930.1 50
	9 5318.3 50	9 12931.1 50
	10 5320.3 50	10 12932.1 50
	11 5322.3 50	11 12933.1 50
	12 5324.3 50	12 12934.1 50
		13 12935.1 50
		14 12936.1 50
		15 12937.1 50
		16 12938.1 50
		17 12939.1 50
		18 12940.1 50
		19 12941.1 50
		20 12942.1 50
		21 12943.1 50
		22 12944.1 50
		23 12945.1 50
		24 12946.1 50
		1 pole = 3 electrical connections
Accessories		
Labelling	Refer to page 186.	Refer to page 186.

* Approvals applied for


Terminals



PKZ 840/.../6.35-V



Diagrams

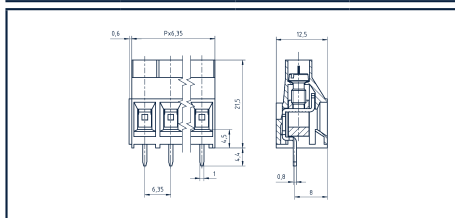

Wire connect type

Clamping yoke

Dimensions

Pitch, mm

6.35

Stripping length, mm

7.00

Drill hole diameter, mm

1.60

Cross-section

Solid (rigid) mm²

0.20-6.00

Finely stranded (flexible) mm²

0.20-4.00

Finely stranded (with wire-end ferrule) mm²

0.25-4.00

Ratings

User group

cULus			
B	C	D	
300		300	450
30		10	32
			III
28-10		28-10	4.00
1.60		1.60	2.50
0.8/M 3.5		0.8/M 3.5	0.8/M 3.5
			3

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Clamping element

Brass

Screw

Steel

Soldering lug

Brass

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

Order information

No. of poles Cat. no. Qty.

Standard colour(s)

● (RAL 6018)

Other colours on request.

2	10523.1	50
3	10524.1	50
4	10525.1	50
5	10526.1	50
6	10527.1	50
7	10528.1	50
8	10529.1	50
9	10530.1	50
10	10531.1	50
11	10532.1	50
12	10533.1	50
13	12714.1	50
14	12715.1	50
15	12716.1	50
16	12717.1	50

Accessories

Labelling

Refer to page 186.



Clamping yoke terminals

Terminals




7.50 mm

PK 360/.../7.50-V

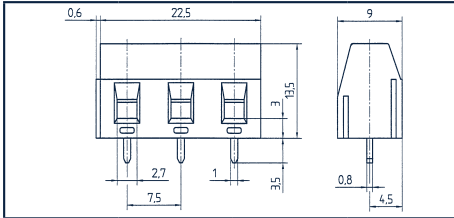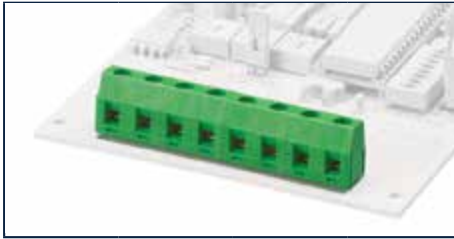

PK 360/.../7.50-H

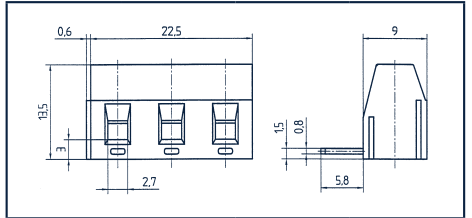

Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Soldering lug

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7016)	
2	10401.1 10401.4	50
3	10402.1 10402.4	50
4	10403.1 10403.4	50
5	10404.1 10404.4	50
6	10405.1 10405.4	50
7	10406.1 10406.4	50
8	10407.1 10407.4	50
9	10408.1 10408.4	50
10	10409.1 10409.4	50
11	10410.1 10410.4	50
12	10411.1 10411.4	50
13	12577.1 12577.4	50
14	12578.1 12578.4	50
15	12579.1 12579.4	50
16	12580.1 12580.4	50
17	12581.1 12581.4	50
18	12582.1 12582.4	50
19	12583.1 12583.4	50
20	12584.1 12584.4	50
21	12585.1 12585.4	50
22	12586.1 12586.4	50
23	12587.1 12587.4	50
24	12588.1 12588.4	50

Accessories

Labelling

Refer to page 186.

Clamping yoke

7.50

6.00

1.30

0.14-2.50

0.14-1.50

0.25-1.50

cULus	VDE
B	C
300	150
15	15
	10
	III
22-12	22-12
1.60	1.30
0.5 / M 3	0.5 / M 3
	0.5 / M 3
	3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Brass

260 °C

3 / 4 s

No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7016)	
2	13605.1 13605.4	50
3	13606.1 13606.4	50
4	13607.1 13607.4	50
5	13608.1 13608.4	50
6	13609.1 13609.4	50
7	13610.1 13610.4	50
8	13611.1 13611.4	50
9	13612.1 13612.4	50
10	13613.1 13613.4	50
11	13614.1 13614.4	50
12	13615.1 13615.4	50
13	13616.1 13616.4	50
14	13617.1 13617.4	50
15	13618.1 13618.4	50
16	13619.1 13619.4	50
17	13620.1 13620.4	50
18	13621.1 13621.4	50
19	13622.1 13622.4	50
20	13623.1 13623.4	50
21	13624.1 13624.4	50
22	13625.1 13625.4	50
23	13626.1 13626.4	50
24	13627.1 13627.4	50

Refer to page 186.


Clamping yoke terminals

Terminals




7.62 mm

PK 710/.../7.62-V

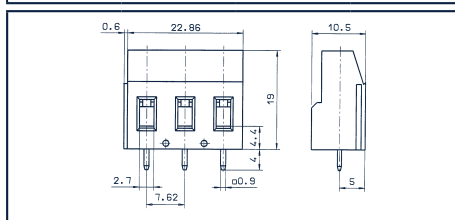

PK 2.5/.../7.62

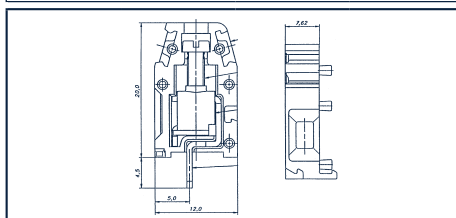

Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Soldering lug

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

No. of poles	Cat. no.		Qty.
	● (RAL 6018)	● (RAL 7016)	
2	10478.1	10478.4	50
3	10479.1	10479.4	50
4	10480.1	10480.4	50
5	10481.1	10481.4	50
6	10482.1	10482.4	50
7	10483.1	10483.4	50
8	10484.1	10484.4	50
9	10485.1	10485.4	50
10	10486.1	10486.4	50
11	10487.1	10487.4	50
12	10488.1	10488.4	50
13	12669.1	12669.4	50
14	12670.1	12670.4	50
15	12671.1	12671.4	50
16	12672.1	12672.4	50
17	12673.1	12673.4	50
18	12674.1	12674.4	50
19	12675.1	12675.4	50
20	12676.1	12676.4	50
21	12677.1	12677.4	50
22	12678.1	12678.4	50
23	12679.1	12679.4	50
24	12680.1	12680.4	50

Accessories

Screw cover

Cat. no.

Labelling

Qty.

AD/PK YE

13283.8

Refer to page 186.

100

Clamping yoke

7.62

7.00

1.30

0.20-4.00

0.20-2.50

0.25-2.50

cULus*

B

C

D

300

20

24-14

0.6/M 2.5

3

VDE*

PA 6.6 / UL 94 V-2

-40 °C / +105 °C

Steel

Steel

Copper

260 °C

3 / 4 s

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 2011)

2 5072.1 5072.3 50

3 5073.1 5073.3 50

4 5074.1 5074.3 50

5 5075.1 5075.3 50

6 5076.1 5076.3 50

7 5077.1 5077.3 50

8 5078.1 5078.3 50

9 5079.1 5079.3 50

10 5080.1 5080.3 50

11 5081.1 5081.3 50

12 5082.1 5082.3 50

13 5083.1 5083.3 50

14 5084.1 5084.3 50

15 5085.1 5085.3 50

16 5086.1 5086.3 50

Terminals




9.52 mm

PKZ 841/.../9.52-V



Diagrams

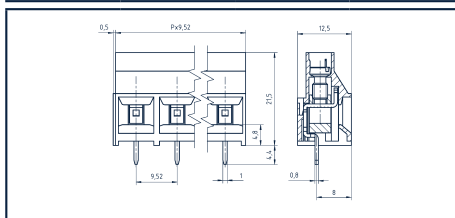

Wire connect type

Clamping yoke

Dimensions

Pitch, mm

9.52

Stripping length, mm

7.00

Drill hole diameter, mm

1.60

Cross-section

Solid (rigid) mm²

0.20-6.00

Finely stranded (flexible) mm²

0.20-4.00

Finely stranded (with wire-end ferrule) mm²

0.25-4.00

Ratings

User group

Rated voltage (V)

300

300

600

1000

Rated current (A)

30

30

5

32

Overvoltage category

III

Max. cross-section AWG / mm²

28-10

28-10

28-10

4.00

Rated surge voltage (kV)

1.60

1.60

2.20

3.50

Torque NM / Screw size

0.8 / M 3.5

0.8 / M 3.5

0.8 / M 3.5

0.8/M 3.5

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Clamping element

Brass

Screw

Steel

Soldering lug

Brass

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

Order information

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

10534.1

50

3

10535.1

50

4

10536.1

50

5

10537.1

50

6

10538.1

50

7

10539.1

50

8

10540.1

50

9

10541.1

50

10

10542.1

50

11

10543.1

50

12

10544.1

50

13

12726.1

50

14

12727.1

50

15

12728.1

50

16

12729.1




50

Accessories

Labelling

Refer to page 186.

Clamping yoke terminals

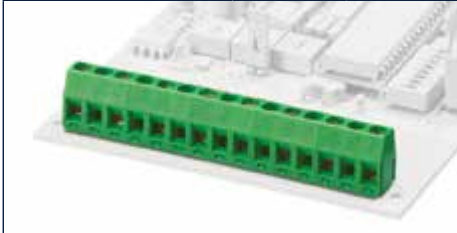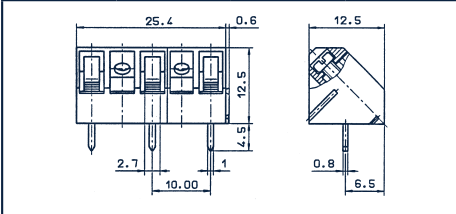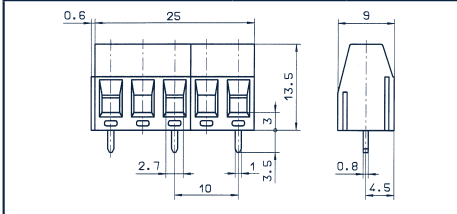Terminals	PK 300/.../10.00	PK 350/.../10.00-V
 10.00 mm		
Diagrams		
Wire connect type	Clamping yoke	Clamping yoke
Dimensions		
Pitch, mm	10.00	10.00
Stripping length, mm	7.00	6.00
Drill hole diameter, mm	1.30	1.30
Cross-section		
Solid (rigid) mm ²	0.14-2.50	0.14-2.50
Finely stranded (flexible) mm ²	0.14-1.50	0.14-1.50
Finely stranded (with wire-end ferrule) mm ²	0.25-1.50	0.25-1.50
Ratings		
User group	cULus 	cULus* 
Rated voltage (V)	B 300 C 150 D 1000	B 300 C 150 D 300 1000
Rated current (A)	15 15 24	15 15 10 17.5
Overvoltage category	III	III
Max. cross-section AWG / mm ²	22-12 22-12 1.50	22-12 22-12 22-12 1.50
Rated surge voltage (kV)	1.60 1.30 3.50	1.60 1.30 1.60 3.50
Torque NM / Screw size	0.4/M 2.6 0.4/M 2.6 0.4/M 2.6	0.5 / M 3 0.5 / M 3 0.5 / M 3 0.5/M 3
Contamination degree	3	3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Clamping element	Brass	Brass
Screw	Steel	Steel
Soldering lug	Copper alloy	Brass
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information	No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
	● (RAL 6018) ● (RAL 7016)	● (RAL 6018)
	2 10335.1 10335.4 50	2 10379.1 50
	3 10336.1 10336.4 50	3 10380.1 50
	4 10337.1 10337.4 50	4 10381.1 50
	5 10338.1 10338.4 50	5 10382.1 50
	6 10339.1 10339.4 50	6 10383.1 50
	7 10340.1 10340.4 50	7 10384.1 50
	8 10341.1 10341.4 50	8 10385.1 50
	9 10342.1 10342.4 50	9 10386.1 50
	10 10343.1 10343.4 50	10 10387.1 50
	11 10344.1 10344.4 50	11 10388.1 50
	12 10345.1 10345.4 50	12 10389.1 50
	13 13545.1 13545.4 50	13 13557.1 50
	14 13546.1 13546.4 50	14 13558.1 50
	15 13547.1 13547.4 50	15 13559.1 50
	16 13548.1 13548.4 50	16 13560.1 50
	17 13549.1 13549.4 50	17 13561.1 50
	18 13550.1 13550.4 50	18 13562.1 50
	19 13551.1 13551.4 50	19 13563.1 50
	20 13552.1 13552.4 50	20 13564.1 50
	21 13553.1 13553.4 50	21 13565.1 50
	22 13554.1 13554.4 50	22 13566.1 50
	23 13555.1 13555.4 50	23 13567.1 50
	24 13556.1 13556.4 50	24 13568.1 50
Accessories		
Labelling	Refer to page 186.	Refer to page 186.

* Approvals applied for

Terminals




10.16 mm



PK 250/.../10.16-V



PK 350/.../10.16-V

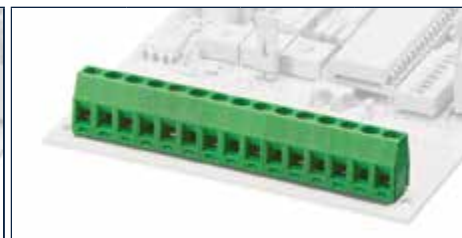

Diagrams

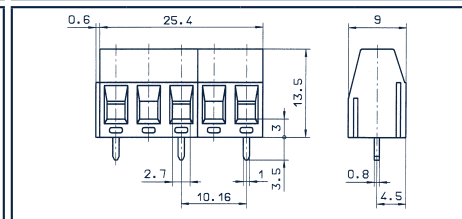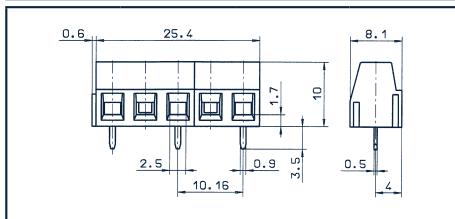

Wire connect type

Clamping yoke

Dimensions

Pitch, mm

10.16

Stripping length, mm

6.00

Drill hole diameter, mm

1.30

Cross-section

Solid (rigid) mm²

0.14-1.50

Finely stranded (flexible) mm²

0.14-1.50

Finely stranded (with wire-end ferrule) mm²

0.25-1.50

Ratings

User group

Rated voltage (V)

B

C

D

1000

Rated current (A)

300

15

10

13

Overvoltage category

III

Max. cross-section AWG / mm²

28-14

28-14

28-14

1.50

Rated surge voltage (kV)

1.60

1.30

1.60

3.50

Torque NM / Screw size

0.5 / M 3

0.5 / M 3

0.5 / M 3

0.5/M 3

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Clamping element

Brass

Screw

Steel

Soldering lug

Bronze

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

Order information

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

10302.1

50

3

10303.1

50

4

10304.1

50

5

10305.1

50

6

10306.1

50

7

10307.1

50

8

10308.1

50

9

10309.1

50

10

10310.1

50

11

10311.1

50

12

10312.1

50

13

13569.1

50

14

13570.1

50

15

13571.1

50

16

13572.1

50

17

13573.1

50

18

13574.1

50

19

13575.1

50

20

13576.1

50

21

13577.1

50

22

13578.1

50

23

13579.1

50

24

13580.1

50

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

10390.1

50

3

10391.1

50

4

10392.1

50

5

10393.1

50

6

10394.1

50

7

10395.1

50

8

10396.1

50

9

10397.1

50

10

10398.1

50

11

10399.1

50

12

10400.1

50

13

13593.1

50

14

13594.1

50

15

13595.1

50

16

13596.1

50

17

13597.1

50

18

13598.1

50

19

13599.1

50

20

13600.1

50

21

13601.1

50

22

13602.1

50

23

13603.1

50

24

13604.1

50

Accessories

Labelling

Refer to page 186.

Refer to page 186.

Clamping yoke terminals

Terminals




10.16 mm

PK 300/.../10.16



Diagrams

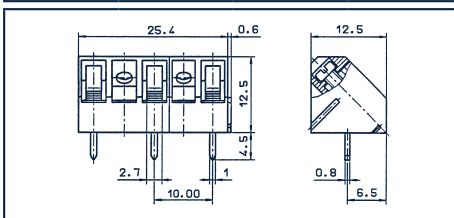

Wire connect type	Clamping yoke			
Dimensions				
Pitch, mm	10.16			
Stripping length, mm	7.00			
Drill hole diameter, mm	1.30			
Cross-section				
Solid (rigid) mm²	0.14-2.50			
Finely stranded (flexible) mm²	0.14-1.50			
Finely stranded (with wire-end ferrule) mm²	0.25-1.50			
Ratings				
User group	cULus			
Rated voltage (V)	B	C	D	
Rated current (A)	300	150		1000
Overtoltage category	15	15		24
Max. cross-section AWG / mm²				III
Rated surge voltage (kV)	22-12	22-12		1.50
Torque NM / Screw size	1.60	1.30		3.50
Contamination degree	0.5/M 2.6	0.5/M 2.6		0.4/M 2.6
Material	3			
Insulation material / Flammability class	PA 6.6 / UL 94 V-0			
Temperature range	-40 °C / +105 °C			
Clamping element	Brass			
Screw	Steel			
Soldering lug	Copper alloy			
Wave soldering process				
Recommended wave soldering temperature	260 °C			
Recommended wave soldering time, min. / max.	3 / 4 s			
Order information	No. of poles	Cat. no.	Qty.	
		● (RAL 6018) ● (RAL 7016)		
	2	10346.1 10346.4	50	
	3	10347.1 10347.4	50	
	4	10348.1 10348.4	50	
	5	10349.1 10349.4	50	
	6	10350.1 10350.4	50	
	7	10351.1 10351.4	50	
	8	10352.1 10352.4	50	
	9	10353.1 10353.4	50	
	10	10354.1 10354.4	50	
	11	10355.1 10355.4	50	
	12	10356.1 10356.4	50	
	13	13581.1 13581.4	50	
	14	13582.1 13582.4	50	
	15	13583.1 13583.4	50	
	16	13584.1 13584.4	50	
	17	13585.1 13585.4	50	
	18	13586.1 13586.4	50	
	19	13587.1 13587.4	50	
	20	13588.1 13588.4	50	
	21	13589.1 13589.4	50	
	22	13590.1 13590.4	50	
	23	13591.1 13591.4	50	
	24	13592.1 13592.4	50	
Accessories				
Labelling	Refer to page 186.			


PK 710/.../15.00-V



15.00 mm



Diagrams

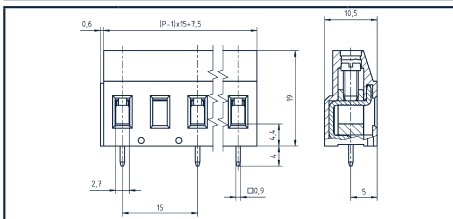
[illegible]

Terminals




7.5 mm

PKT 2200/.../7.50-V

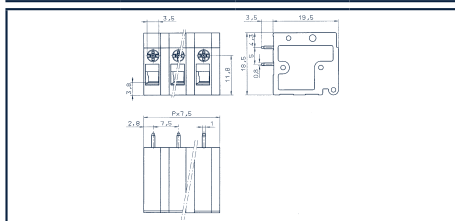

PKT 2200/.../7.50-H

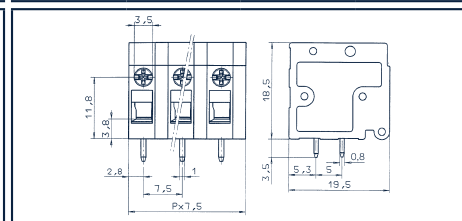

Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Screw

Clamping cage / cam

Soldering lug

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	10594.1	50
3	10595.1	50
4	10596.1	50
5	10597.1	50
6	10598.1	50
7	10599.1	50
8	10600.1	50
9	10601.1	50
10	10602.1	50
11	10603.1	50
12	10604.1	50
13	10605.1	50
14	10606.1	50
15	10607.1	50
16	10608.1	50
17	10609.1	50
18	10610.1	50
19	10611.1	50
20	10612.1	50
21	10613.1	50
22	10614.1	50
23	10615.1	50
24	10616.1	50




Accessories

Labelling

Refer to page 186.

Eccentric top				Eccentric top			
cULus				cULus			
B	C	D	VDE	B	C	D	VDE
300	150	300	450	300	150	300	450
20	20	10	24	20	20	10	24
			III				III
30-12	30-12	30-12	2.50	30-12	30-12	30-12	2.50
1.60	1.60	1.60	2.00	1.60	1.60	1.60	2.00
0.5-0.6/M2.5	0.5-0.6/M2.5	0.5-0.6/M2.5	0.5/M 2.5	0.5-0.6/M2.5	0.5-0.6/M2.5	0.5-0.6/M2.5	0.5/M 2.5
			3				3
PA 6.6 / UL 94 V-0				PA 6.6 / UL 94 V-0			
-40 °C / +105 °C				-40 °C / +105 °C			
Steel				Steel			
Steel / Steel				Steel / Steel			
Copper alloy				Copper alloy			
260 °C				260 °C			
3 / 4 s				3 / 4 s			
No. of poles	Cat. no.	Qty.		No. of poles	Cat. no.	Qty.	
	● (RAL 6018)				● (RAL 6018)		
2	10618.1	50		2	10618.1	50	
3	10619.1	50		3	10619.1	50	
4	10620.1	50		4	10620.1	50	
5	10621.1	50		5	10621.1	50	
6	10622.1	50		6	10622.1	50	
7	10623.1	50		7	10623.1	50	
8	10624.1	50		8	10624.1	50	
9	10625.1	50		9	10625.1	50	
10	10626.1	50		10	10626.1	50	
11	10627.1	50		11	10627.1	50	
12	10628.1	50		12	10628.1	50	
13	10629.1	50		13	10629.1	50	
14	10630.1	50		14	10630.1	50	
15	10631.1	50		15	10631.1	50	
16	10632.1	50		16	10632.1	50	
17	10633.1	50		17	10633.1	50	
18	10634.1	50		18	10634.1	50	
19	10635.1	50		19	10635.1	50	
20	10636.1	50		20	10636.1	50	
21	10637.1	50		21	10637.1	50	
22	10638.1	50		22	10638.1	50	
23	10639.1	50		23	10639.1	50	
24	10640.1	50		24	10640.1	50	



Eccentric top terminals

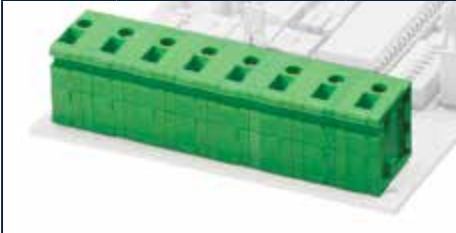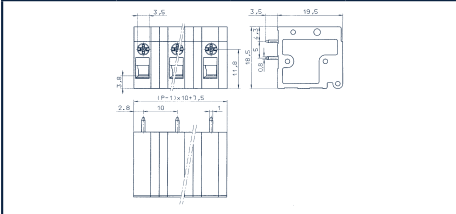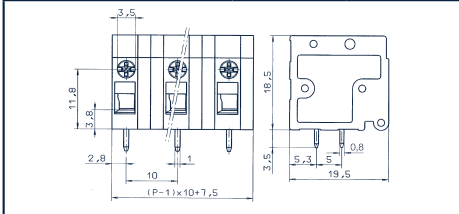Terminals	PKT 2200/.../10.00-V	PKT 2200/.../10.00-H																																																																																																																																																						
 10.00 mm																																																																																																																																																								
Diagrams																																																																																																																																																								
Wire connect type	Eccentric top																																																																																																																																																							
Dimensions																																																																																																																																																								
Pitch, mm	10.00																																																																																																																																																							
Stripping length, mm	9.00																																																																																																																																																							
Drill hole diameter, mm	2 x 1.30																																																																																																																																																							
Cross-section																																																																																																																																																								
Solid (rigid) mm ²	0.20-4.00																																																																																																																																																							
Finely stranded (flexible) mm ²	0.20-2.50																																																																																																																																																							
Finely stranded (with wire-end ferrule) mm ²	0.25-2.50																																																																																																																																																							
Ratings																																																																																																																																																								
User group																																																																																																																																																								
Rated voltage (V)	600																																																																																																																																																							
Rated current (A)	20																																																																																																																																																							
Overvoltage category	III																																																																																																																																																							
Max. cross-section AWG / mm ²	30-12																																																																																																																																																							
Rated surge voltage (kV)	2.20																																																																																																																																																							
Torque NM / Screw size	0.5-0.6/M2.5																																																																																																																																																							
Contamination degree	3																																																																																																																																																							
Material																																																																																																																																																								
Insulation material / Flammability class	PA 6.6 / UL 94 V-0																																																																																																																																																							
Temperature range	-40 °C / +105 °C																																																																																																																																																							
Screw	Steel																																																																																																																																																							
Clamping cage / cam	Steel / Steel																																																																																																																																																							
Soldering lug	Copper alloy																																																																																																																																																							
Wave soldering process																																																																																																																																																								
Recommended wave soldering temperature	260 °C																																																																																																																																																							
Recommended wave soldering time, min. / max.	3 / 4 s																																																																																																																																																							
Order information	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 6018)</td><td></td></tr> <tr><td>2</td><td>10642.1</td><td>50</td></tr> <tr><td>3</td><td>10643.1</td><td>50</td></tr> <tr><td>4</td><td>10644.1</td><td>50</td></tr> <tr><td>5</td><td>10645.1</td><td>50</td></tr> <tr><td>6</td><td>10646.1</td><td>50</td></tr> <tr><td>7</td><td>10647.1</td><td>50</td></tr> <tr><td>8</td><td>10648.1</td><td>50</td></tr> <tr><td>9</td><td>10649.1</td><td>50</td></tr> <tr><td>10</td><td>10650.1</td><td>50</td></tr> <tr><td>11</td><td>10651.1</td><td>50</td></tr> <tr><td>12</td><td>10652.1</td><td>50</td></tr> <tr><td>13</td><td>10653.1</td><td>50</td></tr> <tr><td>14</td><td>10654.1</td><td>50</td></tr> <tr><td>15</td><td>10655.1</td><td>50</td></tr> <tr><td>16</td><td>10656.1</td><td>50</td></tr> <tr><td>17</td><td>10657.1</td><td>50</td></tr> <tr><td>18</td><td>10658.1</td><td>50</td></tr> <tr><td>19</td><td>10659.1</td><td>50</td></tr> <tr><td>20</td><td>10660.1</td><td>50</td></tr> <tr><td>21</td><td>10661.1</td><td>50</td></tr> <tr><td>22</td><td>10662.1</td><td>50</td></tr> <tr><td>23</td><td>10663.1</td><td>50</td></tr> <tr><td>24</td><td>10664.1</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 6018)		2	10642.1	50	3	10643.1	50	4	10644.1	50	5	10645.1	50	6	10646.1	50	7	10647.1	50	8	10648.1	50	9	10649.1	50	10	10650.1	50	11	10651.1	50	12	10652.1	50	13	10653.1	50	14	10654.1	50	15	10655.1	50	16	10656.1	50	17	10657.1	50	18	10658.1	50	19	10659.1	50	20	10660.1	50	21	10661.1	50	22	10662.1	50	23	10663.1	50	24	10664.1	50	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 6018)</td><td></td></tr> <tr><td>2</td><td>10666.1</td><td>50</td></tr> <tr><td>3</td><td>10667.1</td><td>50</td></tr> <tr><td>4</td><td>10668.1</td><td>50</td></tr> <tr><td>5</td><td>10669.1</td><td>50</td></tr> <tr><td>6</td><td>10670.1</td><td>50</td></tr> <tr><td>7</td><td>10671.1</td><td>50</td></tr> <tr><td>8</td><td>10672.1</td><td>50</td></tr> <tr><td>9</td><td>10673.1</td><td>50</td></tr> <tr><td>10</td><td>10674.1</td><td>50</td></tr> <tr><td>11</td><td>10675.1</td><td>50</td></tr> <tr><td>12</td><td>10676.1</td><td>50</td></tr> <tr><td>13</td><td>10677.1</td><td>50</td></tr> <tr><td>14</td><td>10678.1</td><td>50</td></tr> <tr><td>15</td><td>10679.1</td><td>50</td></tr> <tr><td>16</td><td>10680.1</td><td>50</td></tr> <tr><td>17</td><td>10681.1</td><td>50</td></tr> <tr><td>18</td><td>10682.1</td><td>50</td></tr> <tr><td>19</td><td>10683.1</td><td>50</td></tr> <tr><td>20</td><td>10684.1</td><td>50</td></tr> <tr><td>21</td><td>10685.1</td><td>50</td></tr> <tr><td>22</td><td>10686.1</td><td>50</td></tr> <tr><td>23</td><td>10687.1</td><td>50</td></tr> <tr><td>24</td><td>10688.1</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 6018)		2	10666.1	50	3	10667.1	50	4	10668.1	50	5	10669.1	50	6	10670.1	50	7	10671.1	50	8	10672.1	50	9	10673.1	50	10	10674.1	50	11	10675.1	50	12	10676.1	50	13	10677.1	50	14	10678.1	50	15	10679.1	50	16	10680.1	50	17	10681.1	50	18	10682.1	50	19	10683.1	50	20	10684.1	50	21	10685.1	50	22	10686.1	50	23	10687.1	50	24	10688.1	50
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 6018)																																																																																																																																																							
2	10642.1	50																																																																																																																																																						
3	10643.1	50																																																																																																																																																						
4	10644.1	50																																																																																																																																																						
5	10645.1	50																																																																																																																																																						
6	10646.1	50																																																																																																																																																						
7	10647.1	50																																																																																																																																																						
8	10648.1	50																																																																																																																																																						
9	10649.1	50																																																																																																																																																						
10	10650.1	50																																																																																																																																																						
11	10651.1	50																																																																																																																																																						
12	10652.1	50																																																																																																																																																						
13	10653.1	50																																																																																																																																																						
14	10654.1	50																																																																																																																																																						
15	10655.1	50																																																																																																																																																						
16	10656.1	50																																																																																																																																																						
17	10657.1	50																																																																																																																																																						
18	10658.1	50																																																																																																																																																						
19	10659.1	50																																																																																																																																																						
20	10660.1	50																																																																																																																																																						
21	10661.1	50																																																																																																																																																						
22	10662.1	50																																																																																																																																																						
23	10663.1	50																																																																																																																																																						
24	10664.1	50																																																																																																																																																						
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 6018)																																																																																																																																																							
2	10666.1	50																																																																																																																																																						
3	10667.1	50																																																																																																																																																						
4	10668.1	50																																																																																																																																																						
5	10669.1	50																																																																																																																																																						
6	10670.1	50																																																																																																																																																						
7	10671.1	50																																																																																																																																																						
8	10672.1	50																																																																																																																																																						
9	10673.1	50																																																																																																																																																						
10	10674.1	50																																																																																																																																																						
11	10675.1	50																																																																																																																																																						
12	10676.1	50																																																																																																																																																						
13	10677.1	50																																																																																																																																																						
14	10678.1	50																																																																																																																																																						
15	10679.1	50																																																																																																																																																						
16	10680.1	50																																																																																																																																																						
17	10681.1	50																																																																																																																																																						
18	10682.1	50																																																																																																																																																						
19	10683.1	50																																																																																																																																																						
20	10684.1	50																																																																																																																																																						
21	10685.1	50																																																																																																																																																						
22	10686.1	50																																																																																																																																																						
23	10687.1	50																																																																																																																																																						
24	10688.1	50																																																																																																																																																						
Accessories																																																																																																																																																								
Labelling	Refer to page 186.																																																																																																																																																							

Notes

A large grid of dotted lines for taking notes, consisting of 20 columns and 30 rows.

Wire protection terminals

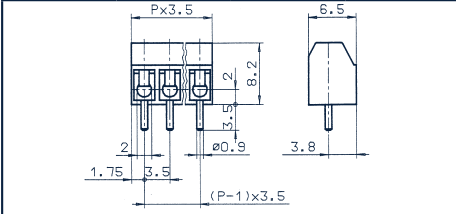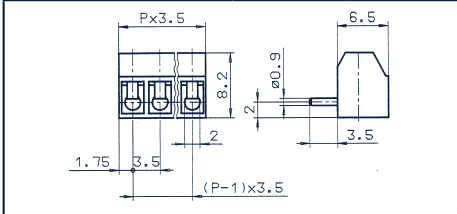
Terminals	PK 550/.../3.50-V	PK 550/.../3.50-H
 3.50 mm		
Diagrams		
Wire connect type	Wire protection	Wire protection
Dimensions		
Pitch, mm	3.50	3.50
Stripping length, mm	5.50	5.50
Drill hole diameter, mm	1.20	1.20
Cross-section		
Solid (rigid) mm ²	0.08-1.50	0.08-1.50
Finely stranded (flexible) mm ²	0.08-1.00	0.08-1.00
Finely stranded (with wire-end ferrule) mm ²	0.14-0.50	0.14-0.50
Ratings		
User group	cULus 	cULus 
Rated voltage (V)	B 125	B 125
Rated current (A)	C 6	C 6
Overvoltage category	D III	D III
Max. cross-section AWG / mm ²	28-16 1.00	28-16 1.00
Rated surge voltage (kV)	1.25	1.25
Torque NM / Screw size	0.25/M 2 0.2/M 2	0.25/M 2 0.2/M 2
Contamination degree	3	3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Clamping element	Brass	Brass
Screw	Steel	Steel
Wire protection	Stainless steel	Stainless steel
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information		
No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7016)	
2	10247.1 10247.4	50
3	10248.1 10248.4	50
4	10249.1 10249.4	50
5	10250.1 10250.4	50
6	10251.1 10251.4	50
7	10252.1 10252.4	50
8	10253.1 10253.4	50
9	10254.1 10254.4	50
10	10255.1 10255.4	50
11	10256.1 10256.4	50
12	10257.1 10257.4	50
13	10258.1 10258.4	50
14	10259.1 10259.4	50
15	10260.1 10260.4	50
16	10261.1 10261.4	50
No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7016)	
2	10262.1 10262.4	50
3	10263.1 10263.4	50
4	10264.1 10264.4	50
5	10265.1 10265.4	50
6	10266.1 10266.4	50
7	10267.1 10267.4	50
8	10268.1 10268.4	50
9	10269.1 10269.4	50
10	10270.1 10270.4	50
11	10271.1 10271.4	50
12	10272.1 10272.4	50
13	10273.1 10273.4	50
14	10274.1 10274.4	50
15	10275.1 10275.4	50
16	10276.1 10276.4	50
Accessories		
Labelling	Refer to page 186.	Refer to page 186.

Terminals




5.00 mm

PK 500/.../5.00-V

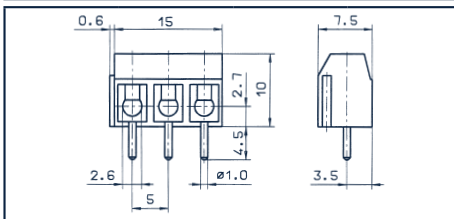

PK 500/.../5.00-H

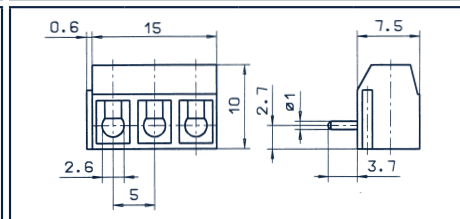

Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Wire protection

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

Wire protection

5.00

5.00

1.30

0.20-1.50

0.20-1.50

0.20-1.50

cULus



B

C

D

300

300

15

10

III

22-14

22-14

1.60

1.60

0.4/M 2.6

0.4/M 2.6

0.4/M 2.6

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel

260 °C

3 / 4 s

Wire protection

5.00

5.00

1.30

0.20-1.50

0.20-1.50

0.20-1.50

cULus



B

C

D

300

300

15

10

III

22-14

22-14

1.60

1.60

0.4/M 2.6

0.4/M 2.6

0.4/M 2.6

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel

260 °C

3 / 4 s

Order information

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10143.1

10143.4

50

3

10144.1

10144.4

50

4

10145.1

10145.4

50

5

10146.1

10146.4

50

6

10147.1

10147.4

50

7

10148.1

10148.4

50

8

10149.1

10149.4

50

9

10150.1

10150.4

50

10

10151.1

10151.4

50

11

10152.1

10152.4

50

12

10153.1

10153.4

50

13

12493.1

12493.4

50

14

12494.1

12494.4

50

15

12495.1

12495.4

50

16

12496.1

12496.4

50

17

12497.1

12497.4

50

18

12498.1

12498.4

50

19

12499.1

12499.4

50

20

12500.1

12500.4

50

21

12501.1

12501.4

50

22

12502.1

12502.4

50

23

12503.1

12503.4

50

24

12504.1

12504.4

50

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10165.1

10165.4

50

3

10166.1

10166.4

50

4

10167.1

10167.4

50

5

10168.1

10168.4

50

6

10169.1

10169.4

50

7

10170.1

10170.4

50

8

10171.1

10171.4

50

9

10172.1

10172.4

50

10

10173.1

10173.4

50

11

10174.1

10174.4

50

12

10175.1

10175.4

50

13

12517.1

12517.4

50

14

12518.1

12518.4

50

15

12519.1

12519.4

50

16

12520.1

12520.4

50

17

12521.1

12521.4

50

18

12522.1

12522.4

50

19

12523.1

12523.4

50

20

12524.1

12524.4

50

21

12525.1

12525.4

50

22

12526.1

12526.4

50

23

12527.1

12527.4

50

24

12528.1

12528.4

50




Accessories

Labelling

Refer to page 186.

Refer to page 186.

Wire protection terminals

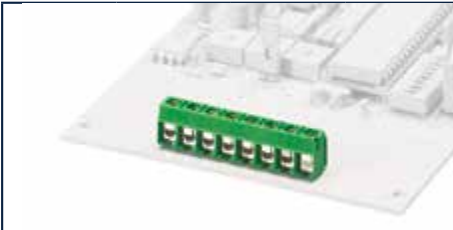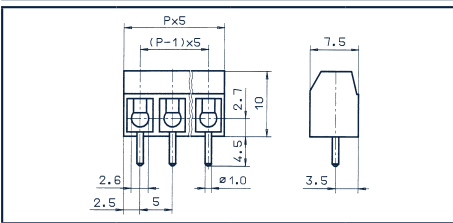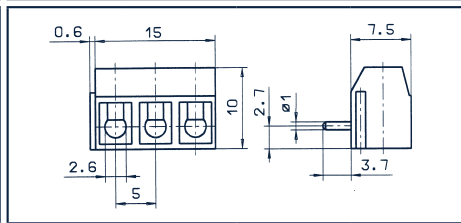Terminals	PK 500/.../5.00-V-BL	PK 500/.../5.00-H-BL
  5.00 mm		
Diagrams		
Wire connect type	Wire protection	Wire protection
Dimensions		
Pitch, mm	5.00	5.00
Stripping length, mm	6.00	6.00
Drill hole diameter, mm	1.30	1.30
Cross-section		
Solid (rigid) mm²	0.20-1.50	0.20-1.50
Finely stranded (flexible) mm²	0.20-1.50	0.20-1.50
Finely stranded (with wire-end ferrule) mm²	0.20-1.50	0.20-1.50
Ratings		
User group	cULus	cULus
Rated voltage (V)	B 300	B 300
Rated current (A)	15	15
Overvoltage category		III
Max. cross-section AWG / mm²	22-14	22-14
Rated surge voltage (kV)	1.60	1.60
Torque NM / Screw size	0.4/M 2.6	0.4/M 2.6
Contamination degree		3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Clamping element	Brass	Brass
Screw	Steel	Steel
Wire protection	Stainless steel	Stainless steel
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information	No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
	● (RAL 6018) ● (RAL 7016)	● (RAL 6018)
	2 10231.1 10231.4 50	2 10713.1 50
	3 10232.1 10232.4 50	3 10714.1 50
	4 10233.1 10233.4 50	4 10715.1 50
	5 10234.1 10234.4 50	5 10716.1 50
	6 10235.1 10235.4 50	6 10717.1 50
	7 10236.1 10236.4 50	7 10718.1 50
	8 10237.1 10237.4 50	8 10719.1 50
	9 10238.1 10238.4 50	9 10720.1 50
	10 10239.1 10239.4 50	10 10721.1 50
	11 10240.1 10240.4 50	11 10722.1 50
	12 10241.1 10241.4 50	12 10723.1 50
Accessories		
Labelling	Refer to page 186.	Refer to page 186.


Terminals



PK 590/.../5.00



Diagrams

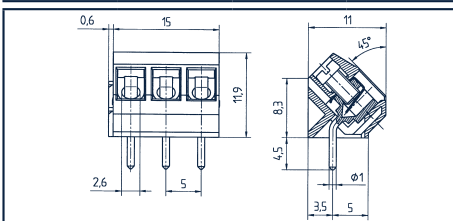

Wire connect type

Eccentric top

Dimensions

Pitch, mm

5.00

Stripping length, mm

6.00

Drill hole diameter, mm

1.30

Cross-section

Solid (rigid) mm²

0.20-1.50

Finely stranded (flexible) mm²

0.20-1.50

Finely stranded (with wire-end ferrule) mm²

0.20-1.50

Ratings

User group

cULus			
B	C	D	
300		300	250
15		10	17.5
			III
22-14		22-14	1.50
1.60		1.60	2.00
0.4/M 2.6		0.4/M 2.6	0.4/M 2.6
			3

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Clamping element

Brass

Screw

Steel

Soldering lug

Stainless steel

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

Order information



No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	12855.1	50
3	12856.1	50
4	12857.1	50
5	12858.1	50
6	12859.1	50
7	12860.1	50
8	12861.1	50
9	12862.1	50
10	12863.1	50
11	12864.1	50
12	12865.1	50
13	12866.1	50
14	12867.1	50
15	12868.1	50
16	12869.1	50
17	12870.1	50
18	12871.1	50
19	12872.1	50
20	12873.1	50
21	12874.1	50
22	12875.1	50
23	12876.1	50
24	12877.1	50

Accessories

Labelling

Refer to page 186.

Wire protection terminals

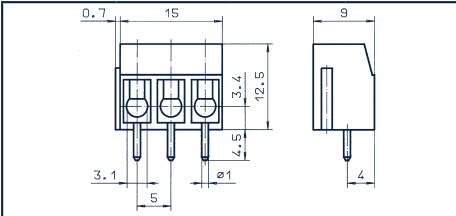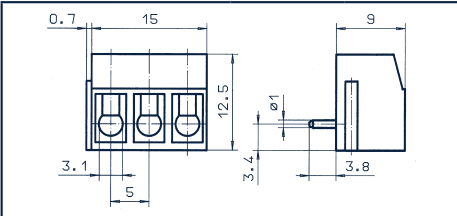Terminals	PK 100/.../5.00-V	PK 100/.../5.00-H																																																																																																																																																						
																																																																																																																																																								
Diagrams																																																																																																																																																								
Wire connect type	Wire protection	Wire protection																																																																																																																																																						
Dimensions																																																																																																																																																								
Pitch, mm	5.00	5.00																																																																																																																																																						
Stripping length, mm	7.00	6.00																																																																																																																																																						
Drill hole diameter, mm	1.30	1.30																																																																																																																																																						
Cross-section																																																																																																																																																								
Solid (rigid) mm ²	0.20-2.50	0.20-2.50																																																																																																																																																						
Finely stranded (flexible) mm ²	0.20-2.50	0.20-2.50																																																																																																																																																						
Finely stranded (with wire-end ferrule) mm ²	0.20-2.50	0.20-2.50																																																																																																																																																						
Ratings																																																																																																																																																								
User group	B C D	B C D																																																																																																																																																						
Rated voltage (V)	300	300																																																																																																																																																						
Rated current (A)	20	10																																																																																																																																																						
Overvoltage category		III																																																																																																																																																						
Max. cross-section AWG / mm ²	22-12	22-12																																																																																																																																																						
Rated surge voltage (kV)	1.60	1.60																																																																																																																																																						
Torque NM / Screw size	0.45/M 3	0.45/M 3																																																																																																																																																						
Contamination degree		3																																																																																																																																																						
Material																																																																																																																																																								
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0																																																																																																																																																						
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C																																																																																																																																																						
Clamping element	Brass	Brass																																																																																																																																																						
Screw	Steel	Steel																																																																																																																																																						
Wire protection	Stainless steel	Stainless steel																																																																																																																																																						
Wave soldering process																																																																																																																																																								
Recommended wave soldering temperature	260 °C	260 °C																																																																																																																																																						
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s																																																																																																																																																						
Order information	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 6018) ● (RAL 7016)</td><td></td></tr> <tr><td>2</td><td>10001.1 10001.4</td><td>50</td></tr> <tr><td>3</td><td>10002.1 10002.4</td><td>50</td></tr> <tr><td>4</td><td>10003.1 10003.4</td><td>50</td></tr> <tr><td>5</td><td>10004.1 10004.4</td><td>50</td></tr> <tr><td>6</td><td>10005.1 10005.4</td><td>50</td></tr> <tr><td>7</td><td>10006.1 10006.4</td><td>50</td></tr> <tr><td>8</td><td>10007.1 10007.4</td><td>50</td></tr> <tr><td>9</td><td>10008.1 10008.4</td><td>50</td></tr> <tr><td>10</td><td>10009.1 10009.4</td><td>50</td></tr> <tr><td>11</td><td>10010.1 10010.4</td><td>50</td></tr> <tr><td>12</td><td>10011.1 10011.4</td><td>50</td></tr> <tr><td>13</td><td>12385.1 12385.4</td><td>50</td></tr> <tr><td>14</td><td>12386.1 12386.4</td><td>50</td></tr> <tr><td>15</td><td>12387.1 12387.4</td><td>50</td></tr> <tr><td>16</td><td>12388.1 12388.4</td><td>50</td></tr> <tr><td>17</td><td>12389.1 12389.4</td><td>50</td></tr> <tr><td>18</td><td>12390.1 12390.4</td><td>50</td></tr> <tr><td>19</td><td>12391.1 12391.4</td><td>50</td></tr> <tr><td>20</td><td>12392.1 12392.4</td><td>50</td></tr> <tr><td>21</td><td>12393.1 12393.4</td><td>50</td></tr> <tr><td>22</td><td>12394.1 12394.4</td><td>50</td></tr> <tr><td>23</td><td>12395.1 12395.4</td><td>50</td></tr> <tr><td>24</td><td>12396.1 12396.4</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 6018) ● (RAL 7016)		2	10001.1 10001.4	50	3	10002.1 10002.4	50	4	10003.1 10003.4	50	5	10004.1 10004.4	50	6	10005.1 10005.4	50	7	10006.1 10006.4	50	8	10007.1 10007.4	50	9	10008.1 10008.4	50	10	10009.1 10009.4	50	11	10010.1 10010.4	50	12	10011.1 10011.4	50	13	12385.1 12385.4	50	14	12386.1 12386.4	50	15	12387.1 12387.4	50	16	12388.1 12388.4	50	17	12389.1 12389.4	50	18	12390.1 12390.4	50	19	12391.1 12391.4	50	20	12392.1 12392.4	50	21	12393.1 12393.4	50	22	12394.1 12394.4	50	23	12395.1 12395.4	50	24	12396.1 12396.4	50	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 6018) ● (RAL 7016)</td><td></td></tr> <tr><td>2</td><td>10012.1 10012.4</td><td>50</td></tr> <tr><td>3</td><td>10013.1 10013.4</td><td>50</td></tr> <tr><td>4</td><td>10014.1 10014.4</td><td>50</td></tr> <tr><td>5</td><td>10015.1 10015.4</td><td>50</td></tr> <tr><td>6</td><td>10016.1 10016.4</td><td>50</td></tr> <tr><td>7</td><td>10017.1 10017.4</td><td>50</td></tr> <tr><td>8</td><td>10018.1 10018.4</td><td>50</td></tr> <tr><td>9</td><td>10019.1 10019.4</td><td>50</td></tr> <tr><td>10</td><td>10020.1 10020.4</td><td>50</td></tr> <tr><td>11</td><td>10021.1 10021.4</td><td>50</td></tr> <tr><td>12</td><td>10022.1 10022.4</td><td>50</td></tr> <tr><td>13</td><td>12373.1 12373.4</td><td>50</td></tr> <tr><td>14</td><td>12374.1 12374.4</td><td>50</td></tr> <tr><td>15</td><td>12375.1 12375.4</td><td>50</td></tr> <tr><td>16</td><td>12376.1 12376.4</td><td>50</td></tr> <tr><td>17</td><td>12377.1 12377.4</td><td>50</td></tr> <tr><td>18</td><td>12378.1 12378.4</td><td>50</td></tr> <tr><td>19</td><td>12379.1 12379.4</td><td>50</td></tr> <tr><td>20</td><td>12380.1 12380.4</td><td>50</td></tr> <tr><td>21</td><td>12381.1 12381.4</td><td>50</td></tr> <tr><td>22</td><td>12382.1 12382.4</td><td>50</td></tr> <tr><td>23</td><td>12383.1 12383.4</td><td>50</td></tr> <tr><td>24</td><td>12384.1 12384.4</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 6018) ● (RAL 7016)		2	10012.1 10012.4	50	3	10013.1 10013.4	50	4	10014.1 10014.4	50	5	10015.1 10015.4	50	6	10016.1 10016.4	50	7	10017.1 10017.4	50	8	10018.1 10018.4	50	9	10019.1 10019.4	50	10	10020.1 10020.4	50	11	10021.1 10021.4	50	12	10022.1 10022.4	50	13	12373.1 12373.4	50	14	12374.1 12374.4	50	15	12375.1 12375.4	50	16	12376.1 12376.4	50	17	12377.1 12377.4	50	18	12378.1 12378.4	50	19	12379.1 12379.4	50	20	12380.1 12380.4	50	21	12381.1 12381.4	50	22	12382.1 12382.4	50	23	12383.1 12383.4	50	24	12384.1 12384.4	50
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 6018) ● (RAL 7016)																																																																																																																																																							
2	10001.1 10001.4	50																																																																																																																																																						
3	10002.1 10002.4	50																																																																																																																																																						
4	10003.1 10003.4	50																																																																																																																																																						
5	10004.1 10004.4	50																																																																																																																																																						
6	10005.1 10005.4	50																																																																																																																																																						
7	10006.1 10006.4	50																																																																																																																																																						
8	10007.1 10007.4	50																																																																																																																																																						
9	10008.1 10008.4	50																																																																																																																																																						
10	10009.1 10009.4	50																																																																																																																																																						
11	10010.1 10010.4	50																																																																																																																																																						
12	10011.1 10011.4	50																																																																																																																																																						
13	12385.1 12385.4	50																																																																																																																																																						
14	12386.1 12386.4	50																																																																																																																																																						
15	12387.1 12387.4	50																																																																																																																																																						
16	12388.1 12388.4	50																																																																																																																																																						
17	12389.1 12389.4	50																																																																																																																																																						
18	12390.1 12390.4	50																																																																																																																																																						
19	12391.1 12391.4	50																																																																																																																																																						
20	12392.1 12392.4	50																																																																																																																																																						
21	12393.1 12393.4	50																																																																																																																																																						
22	12394.1 12394.4	50																																																																																																																																																						
23	12395.1 12395.4	50																																																																																																																																																						
24	12396.1 12396.4	50																																																																																																																																																						
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 6018) ● (RAL 7016)																																																																																																																																																							
2	10012.1 10012.4	50																																																																																																																																																						
3	10013.1 10013.4	50																																																																																																																																																						
4	10014.1 10014.4	50																																																																																																																																																						
5	10015.1 10015.4	50																																																																																																																																																						
6	10016.1 10016.4	50																																																																																																																																																						
7	10017.1 10017.4	50																																																																																																																																																						
8	10018.1 10018.4	50																																																																																																																																																						
9	10019.1 10019.4	50																																																																																																																																																						
10	10020.1 10020.4	50																																																																																																																																																						
11	10021.1 10021.4	50																																																																																																																																																						
12	10022.1 10022.4	50																																																																																																																																																						
13	12373.1 12373.4	50																																																																																																																																																						
14	12374.1 12374.4	50																																																																																																																																																						
15	12375.1 12375.4	50																																																																																																																																																						
16	12376.1 12376.4	50																																																																																																																																																						
17	12377.1 12377.4	50																																																																																																																																																						
18	12378.1 12378.4	50																																																																																																																																																						
19	12379.1 12379.4	50																																																																																																																																																						
20	12380.1 12380.4	50																																																																																																																																																						
21	12381.1 12381.4	50																																																																																																																																																						
22	12382.1 12382.4	50																																																																																																																																																						
23	12383.1 12383.4	50																																																																																																																																																						
24	12384.1 12384.4	50																																																																																																																																																						
Accessories																																																																																																																																																								
Labelling	Refer to page 186.	Refer to page 186.																																																																																																																																																						

Terminals



5.00 mm



PK 100/.../5.00-V-BL



PK 100/.../5.00-H-BL



Diagrams

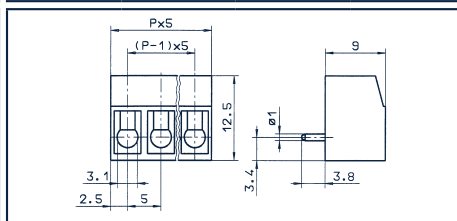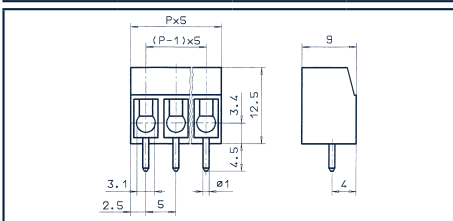

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Wire protection

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

Wire protection

5.00

7.00

1.30

cULus



B

C

D

B

C

D

300

300

300

300

20

10

20

10

III

III

III

III

22-12

22-12

22-12

22-12

1.60

1.60

1.60

1.60

0.45/M 3

0.45/M 3

0.45/M 3

0.45/M 3

3

3

3

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel

260 °C

3 / 4 s

260 °C

3 / 4 s

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10045.1

10045.4

50

3

10046.1

10046.4

50

4

10047.1

10047.4

50

5

10048.1

10048.4

50

6

10049.1

10049.4

50

7

10050.1

10050.4

50

8

10051.1

10051.4

50

9

10052.1

10052.4

50

10

10053.1

10053.4

50

11

10054.1

10054.4

50

12

10055.1

10055.4

50

13

12421.1

12421.4

50

14

12422.1

12422.4

50

15

12423.1

12423.4

50

16

12424.1

12424.4

50

17

12425.1

12425.4

50

18

12426.1

12426.4

50

19

12427.1

12427.4

50

20

12428.1

12428.4

50

21

12429.1

12429.4

50

22

12430.1

12430.4

50

23

12431.1

12431.4

50

24

12432.1

12432.4

50

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10056.1

10056.4

50

3

10057.1

10057.4

50

4

10058.1

10058.4

50

5

10059.1

10059.4

50

6

10060.1

10060.4

50

7

10061.1

10061.4

50

8

10062.1

10062.4

50

9

10063.1

10063.4

50

10

10064.1

10064.4

50

11

10065.1

10065.4

50

12

10066.1

10066.4

50

13

12433.1

12433.4

50

14

12434.1

12434.4

50

15

12435.1

12435.4

50

16

12436.1

12436.4

50

17

12437.1

12437.4

50

18

12438.1

12438.4

50

19

12439.1

12439.4

50

20

12440.1

12440.4

50

21

12441.1

12441.4

50

22

12442.1

12442.4

50

23

12443.1

12443.4

50

24

12444.1

12444.4

50

Accessories

Labelling

Refer to page 186.

Refer to page 186.

Wire protection terminals

Terminals




5.00 mm

PK 104/.../5.00-V



Diagrams

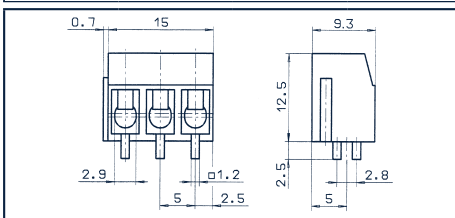

Wire connect type

Wire protection

Dimensions

Pitch, mm

5.00

Stripping length, mm

7.00

Drill hole diameter, mm

2 x 2.00

Cross-section

Solid (rigid) mm²

0.20-4.00

Finely stranded (flexible) mm²

0.20-4.00

Finely stranded (with wire-end ferrule) mm²

0.20-2.50

Ratings

User group

Rated voltage (V)

cULus			VDE
B	C	D	
300	150	300	250
20	20	10	32
			III
22-12	22-12	22-12	4.00
1.60	1.30	1.60	2.00
0.8 / M 3	0.8 / M 3	0.8 / M 3	0.5/M 3
			3

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Clamping element

Brass

Screw

Steel

Wire protection

Stainless steel

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min. / max.

3 / 4 s

Order information

No. of poles	Cat. no.		Qty.
	● (RAL 6018)	● (RAL 7016)	
2	10077.1	10077.4	50
3	10078.1	10078.4	50
4	10079.1	10079.4	50
5	10080.1	10080.4	50
6	10081.1	10081.4	50
7	10082.1	10082.4	50
8	10083.1	10083.4	50
9	10084.1	10084.4	50
10	10085.1	10085.4	50
11	10086.1	10086.4	50
12	10087.1	10087.4	50
13	12397.1	12397.4	50
14	12398.1	12398.4	50
15	12399.1	12399.4	50
16	12400.1	12400.4	50
17	12401.1	12401.4	50
18	12402.1	12402.4	50
19	12403.1	12403.4	50
20	12404.1	12404.4	50
21	12405.1	12405.4	50
22	12406.1	12406.4	50
23	12407.1	12407.4	50
24	12408.1	12408.4	50

Accessories

Labelling

Refer to page 186.

Terminals



5.08 mm



PK 500/.../5.08-V



PK 500/.../5.08-H



Diagrams

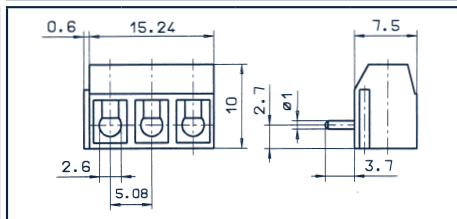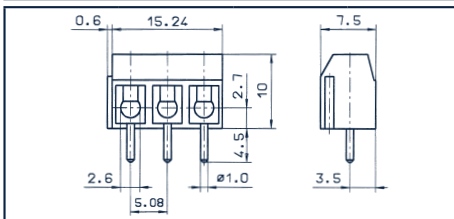

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Wire protection

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

No. of poles	Cat. no.		Qty.
	● (RAL 6018)	● (RAL 7016)	
2	10154.1	10154.4	50
3	10155.1	10155.4	50
4	10156.1	10156.4	50
5	10157.1	10157.4	50
6	10158.1	10158.4	50
7	10159.1	10159.4	50
8	10160.1	10160.4	50
9	10161.1	10161.4	50
10	10162.1	10162.4	50
11	10163.1	10163.4	50
12	10164.1	10164.4	50
13	12505.1	12505.4	50
14	12506.1	12506.4	50
15	12507.1	12507.4	50
16	12508.1	12508.4	50
17	12509.1	12509.4	50
18	12510.1	12510.4	50
19	12511.1	12511.4	50
20	12512.1	12512.4	50
21	12513.1	12513.4	50
22	12514.1	12514.4	50
23	12515.1	12515.4	50
24	12516.1	12516.4	50

Accessories

Labelling

Refer to page 186.

Wire protection

5.08

5.00

1.30

0.20-1.50

0.20-1.50

0.20-1.50

cULus				VDI
B	C	D		
300		300	250	
15		10	17.5	
				III
22-14		22-14	1.50	
1.60		1.60	2.00	
0.4/M 2.6		0.4/M 2.6	0.4/M 2.6	3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel



260 °C

3 / 4 s

No. of poles	Cat. no.		Qty.
	● (RAL 6018)	● (RAL 7016)	
2	10176.1	10176.4	50
3	10177.1	10177.4	50
4	10178.1	10178.4	50
5	10179.1	10179.4	50
6	10180.1	10180.4	50
7	10181.1	10181.4	50
8	10182.1	10182.4	50
9	10183.1	10183.4	50
10	10184.1	10184.4	50
11	10185.1	10185.4	50
12	10186.1	10186.4	50
13	12529.1	12529.4	50
14	12530.1	12530.4	50
15	12531.1	12531.4	50
16	12532.1	12532.4	50
17	12533.1	12533.4	50
18	12534.1	12534.4	50
19	12535.1	12535.4	50
20	12536.1	12536.4	50
21	12537.1	12537.4	50
22	12538.1	12538.4	50
23	12539.1	12539.4	50
24	12540.1	12540.4	50

Refer to page 186.

Wire protection terminals

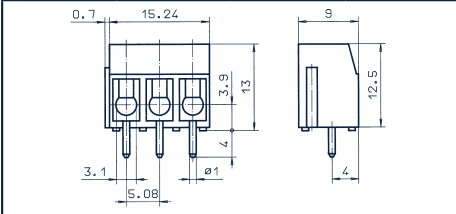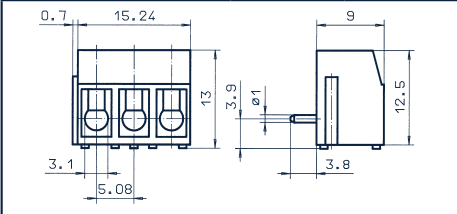
Terminals	PK 120/.../5.08-V	PK 120/.../5.08-H
 5.08 mm		
Diagrams		
Wire connect type	Wire protection	Wire protection
Dimensions		
Pitch, mm	5.08	5.08
Stripping length, mm	7.00	6.00
Drill hole diameter, mm	1.30	1.30
Cross-section		
Solid (rigid) mm ²	0.20-2.50	0.20-2.50
Finely stranded (flexible) mm ²	0.20-2.50	0.20-2.50
Finely stranded (with wire-end ferrule) mm ²	0.20-2.50	0.20-2.50
Ratings		
User group	cULus 	cULus 
Rated voltage (V)	B 300	B 300
Rated current (A)	C 20	C 10
Overvoltage category	D 10	D 10
Max. cross-section AWG / mm ²	III	III
Rated surge voltage (kV)	22-12	22-12
Torque NM / Screw size	2.50	2.50
Contamination degree	1.60	1.60
	0.45/M 3	0.45/M 3
	3	3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Clamping element	Brass	Brass
Screw	Steel	Steel
Wire protection	Stainless steel	Stainless steel
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s
Order information		
No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7016)	
2	10121.1 10121.4	50
3	10122.1 10122.4	50
4	10123.1 10123.4	50
5	10124.1 10124.4	50
6	10125.1 10125.4	50
7	10126.1 10126.4	50
8	10127.1 10127.4	50
9	10128.1 10128.4	50
10	10129.1 10129.4	50
11	10130.1 10130.4	50
12	10131.1 10131.4	50
13	12409.1 12409.4	50
14	12410.1 12410.4	50
15	12411.1 12411.4	50
16	12412.1 12412.4	50
17	12413.1 12413.4	50
18	12414.1 12414.4	50
19	12415.1 12415.4	50
20	12416.1 12416.4	50
21	12417.1 12417.4	50
22	12418.1 12418.4	50
23	12419.1 12419.4	50
24	12420.1 12420.4	50
Accessories		
Labelling	Refer to page 186.	Refer to page 186.

Terminals




7.00 mm

PK 550/.../7.00-V

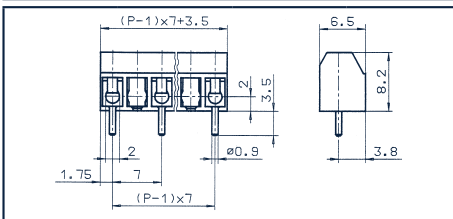

PK 550/.../7.00-H

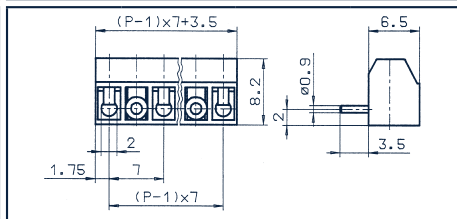

Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Wire protection

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

Wire protection

7.00

5.50

1.20

0.08-1.50

0.08-1.00

0.14-0.50

cULus



B

C

D

300

150

300

6

6

6

450

13.5

III

28-16

28-16

28-16

2.50

1.60

1.30

1.60

2.00

0.25 / M 2

0.25 / M 2

0.25 / M 2

0.2/M 2

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel

260 °C

3 / 4 s

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10277.1

10277.4

50

3

10278.1

10278.4

50

4

10279.1

10279.4

50

5

10280.1

10280.4

50

6

10281.1

10281.4

50

7

10282.1

10282.4

50

8

10283.1

10283.4

50

Wire protection

7.00

5.50

1.20

0.08-1.50

0.08-1.00

0.14-0.50

cULus



B

C

D

300

150

300

6

6

6

450

13.5

III

28-16

28-16

28-16

1.00

1.60

1.30

1.60

2.50

0.25 / M 2

0.25 / M 2

0.25 / M 2

0.2/M 2

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel

260 °C

3 / 4 s

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10284.1

10284.4

50

3

10285.1

10285.4

50

4

10286.1

10286.4

50

5

10287.1

10287.4

50

6

10288.1

10288.4

50

7

10289.1

10289.4

50

8

10290.1

10290.4

50



Accessories

Labelling

Refer to page 186.

Refer to page 186.

Wire protection terminals

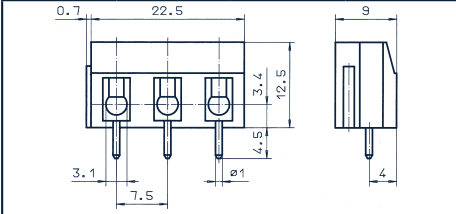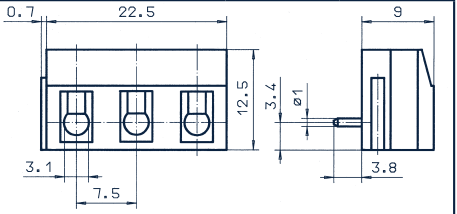Terminals	PK 110/.../7.50-V	PK 110/.../7.50-H																																																																																																																																																						
 																																																																																																																																																								
Diagrams																																																																																																																																																								
Wire connect type	Wire protection	Wire protection																																																																																																																																																						
Dimensions																																																																																																																																																								
Pitch, mm	7.50	7.50																																																																																																																																																						
Stripping length, mm	7.00	6.00																																																																																																																																																						
Drill hole diameter, mm	1.30	1.30																																																																																																																																																						
Cross-section																																																																																																																																																								
Solid (rigid) mm ²	0.20-2.50	0.20-2.50																																																																																																																																																						
Finely stranded (flexible) mm ²	0.20-2.50	0.20-2.50																																																																																																																																																						
Finely stranded (with wire-end ferrule) mm ²	0.20-2.50	0.20-2.50																																																																																																																																																						
Ratings																																																																																																																																																								
User group																																																																																																																																																								
Rated voltage (V)	300	300																																																																																																																																																						
Rated current (A)	20	20																																																																																																																																																						
Overvoltage category	III	III																																																																																																																																																						
Max. cross-section AWG / mm ²	22-14	22-14																																																																																																																																																						
Rated surge voltage (kV)	1.60	1.60																																																																																																																																																						
Torque NM / Screw size	0.45 / M 3	0.45 / M 3																																																																																																																																																						
Contamination degree	3	3																																																																																																																																																						
Material																																																																																																																																																								
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0																																																																																																																																																						
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C																																																																																																																																																						
Clamping element	Brass	Brass																																																																																																																																																						
Screw	Steel	Steel																																																																																																																																																						
Wire protection	Stainless steel	Stainless steel																																																																																																																																																						
Wave soldering process																																																																																																																																																								
Recommended wave soldering temperature	260 °C	260 °C																																																																																																																																																						
Recommended wave soldering time, min. / max.	3 / 4 s	3 / 4 s																																																																																																																																																						
Order information																																																																																																																																																								
	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 6018) ● (RAL 7016)</td><td></td></tr> <tr><td>2</td><td>10099.1 10099.4</td><td>50</td></tr> <tr><td>3</td><td>10100.1 10100.4</td><td>50</td></tr> <tr><td>4</td><td>10101.1 10101.4</td><td>50</td></tr> <tr><td>5</td><td>10102.1 10102.4</td><td>50</td></tr> <tr><td>6</td><td>10103.1 10103.4</td><td>50</td></tr> <tr><td>7</td><td>10104.1 10104.4</td><td>50</td></tr> <tr><td>8</td><td>10105.1 10105.4</td><td>50</td></tr> <tr><td>9</td><td>10106.1 10106.4</td><td>50</td></tr> <tr><td>10</td><td>10107.1 10107.4</td><td>50</td></tr> <tr><td>11</td><td>10108.1 10108.4</td><td>50</td></tr> <tr><td>12</td><td>10109.1 10109.4</td><td>50</td></tr> <tr><td>13</td><td>12457.1 12457.4</td><td>50</td></tr> <tr><td>14</td><td>12458.1 12458.4</td><td>50</td></tr> <tr><td>15</td><td>12459.1 12459.4</td><td>50</td></tr> <tr><td>16</td><td>12460.1 12460.4</td><td>50</td></tr> <tr><td>17</td><td>12461.1 12461.4</td><td>50</td></tr> <tr><td>18</td><td>12462.1 12462.4</td><td>50</td></tr> <tr><td>19</td><td>12463.1 12463.4</td><td>50</td></tr> <tr><td>20</td><td>12464.1 12464.4</td><td>50</td></tr> <tr><td>21</td><td>12465.1 12465.4</td><td>50</td></tr> <tr><td>22</td><td>12466.1 12466.4</td><td>50</td></tr> <tr><td>23</td><td>12467.1 12467.4</td><td>50</td></tr> <tr><td>24</td><td>12468.1 12468.4</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 6018) ● (RAL 7016)		2	10099.1 10099.4	50	3	10100.1 10100.4	50	4	10101.1 10101.4	50	5	10102.1 10102.4	50	6	10103.1 10103.4	50	7	10104.1 10104.4	50	8	10105.1 10105.4	50	9	10106.1 10106.4	50	10	10107.1 10107.4	50	11	10108.1 10108.4	50	12	10109.1 10109.4	50	13	12457.1 12457.4	50	14	12458.1 12458.4	50	15	12459.1 12459.4	50	16	12460.1 12460.4	50	17	12461.1 12461.4	50	18	12462.1 12462.4	50	19	12463.1 12463.4	50	20	12464.1 12464.4	50	21	12465.1 12465.4	50	22	12466.1 12466.4	50	23	12467.1 12467.4	50	24	12468.1 12468.4	50	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 6018) ● (RAL 7016)</td><td></td></tr> <tr><td>2</td><td>10110.1 10110.4</td><td>50</td></tr> <tr><td>3</td><td>10111.1 10111.4</td><td>50</td></tr> <tr><td>4</td><td>10112.1 10112.4</td><td>50</td></tr> <tr><td>5</td><td>10113.1 10113.4</td><td>50</td></tr> <tr><td>6</td><td>10114.1 10114.4</td><td>50</td></tr> <tr><td>7</td><td>10115.1 10115.4</td><td>50</td></tr> <tr><td>8</td><td>10116.1 10116.4</td><td>50</td></tr> <tr><td>9</td><td>10117.1 10117.4</td><td>50</td></tr> <tr><td>10</td><td>10118.1 10118.4</td><td>50</td></tr> <tr><td>11</td><td>10119.1 10119.4</td><td>50</td></tr> <tr><td>12</td><td>10120.1 10120.4</td><td>50</td></tr> <tr><td>13</td><td>12469.1 12469.4</td><td>50</td></tr> <tr><td>14</td><td>12470.1 12470.4</td><td>50</td></tr> <tr><td>15</td><td>12471.1 12471.4</td><td>50</td></tr> <tr><td>16</td><td>12472.1 12472.4</td><td>50</td></tr> <tr><td>17</td><td>12473.1 12473.4</td><td>50</td></tr> <tr><td>18</td><td>12474.1 12474.4</td><td>50</td></tr> <tr><td>19</td><td>12475.1 12475.4</td><td>50</td></tr> <tr><td>20</td><td>12476.1 12476.4</td><td>50</td></tr> <tr><td>21</td><td>12477.1 12477.4</td><td>50</td></tr> <tr><td>22</td><td>12478.1 12478.4</td><td>50</td></tr> <tr><td>23</td><td>12479.1 12479.4</td><td>50</td></tr> <tr><td>24</td><td>12480.1 12480.4</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 6018) ● (RAL 7016)		2	10110.1 10110.4	50	3	10111.1 10111.4	50	4	10112.1 10112.4	50	5	10113.1 10113.4	50	6	10114.1 10114.4	50	7	10115.1 10115.4	50	8	10116.1 10116.4	50	9	10117.1 10117.4	50	10	10118.1 10118.4	50	11	10119.1 10119.4	50	12	10120.1 10120.4	50	13	12469.1 12469.4	50	14	12470.1 12470.4	50	15	12471.1 12471.4	50	16	12472.1 12472.4	50	17	12473.1 12473.4	50	18	12474.1 12474.4	50	19	12475.1 12475.4	50	20	12476.1 12476.4	50	21	12477.1 12477.4	50	22	12478.1 12478.4	50	23	12479.1 12479.4	50	24	12480.1 12480.4	50
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 6018) ● (RAL 7016)																																																																																																																																																							
2	10099.1 10099.4	50																																																																																																																																																						
3	10100.1 10100.4	50																																																																																																																																																						
4	10101.1 10101.4	50																																																																																																																																																						
5	10102.1 10102.4	50																																																																																																																																																						
6	10103.1 10103.4	50																																																																																																																																																						
7	10104.1 10104.4	50																																																																																																																																																						
8	10105.1 10105.4	50																																																																																																																																																						
9	10106.1 10106.4	50																																																																																																																																																						
10	10107.1 10107.4	50																																																																																																																																																						
11	10108.1 10108.4	50																																																																																																																																																						
12	10109.1 10109.4	50																																																																																																																																																						
13	12457.1 12457.4	50																																																																																																																																																						
14	12458.1 12458.4	50																																																																																																																																																						
15	12459.1 12459.4	50																																																																																																																																																						
16	12460.1 12460.4	50																																																																																																																																																						
17	12461.1 12461.4	50																																																																																																																																																						
18	12462.1 12462.4	50																																																																																																																																																						
19	12463.1 12463.4	50																																																																																																																																																						
20	12464.1 12464.4	50																																																																																																																																																						
21	12465.1 12465.4	50																																																																																																																																																						
22	12466.1 12466.4	50																																																																																																																																																						
23	12467.1 12467.4	50																																																																																																																																																						
24	12468.1 12468.4	50																																																																																																																																																						
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 6018) ● (RAL 7016)																																																																																																																																																							
2	10110.1 10110.4	50																																																																																																																																																						
3	10111.1 10111.4	50																																																																																																																																																						
4	10112.1 10112.4	50																																																																																																																																																						
5	10113.1 10113.4	50																																																																																																																																																						
6	10114.1 10114.4	50																																																																																																																																																						
7	10115.1 10115.4	50																																																																																																																																																						
8	10116.1 10116.4	50																																																																																																																																																						
9	10117.1 10117.4	50																																																																																																																																																						
10	10118.1 10118.4	50																																																																																																																																																						
11	10119.1 10119.4	50																																																																																																																																																						
12	10120.1 10120.4	50																																																																																																																																																						
13	12469.1 12469.4	50																																																																																																																																																						
14	12470.1 12470.4	50																																																																																																																																																						
15	12471.1 12471.4	50																																																																																																																																																						
16	12472.1 12472.4	50																																																																																																																																																						
17	12473.1 12473.4	50																																																																																																																																																						
18	12474.1 12474.4	50																																																																																																																																																						
19	12475.1 12475.4	50																																																																																																																																																						
20	12476.1 12476.4	50																																																																																																																																																						
21	12477.1 12477.4	50																																																																																																																																																						
22	12478.1 12478.4	50																																																																																																																																																						
23	12479.1 12479.4	50																																																																																																																																																						
24	12480.1 12480.4	50																																																																																																																																																						
Accessories																																																																																																																																																								
Labelling	Refer to page 186.	Refer to page 186.																																																																																																																																																						

Terminals




7.50 mm

PK 114/.../7.50-V



Diagrams

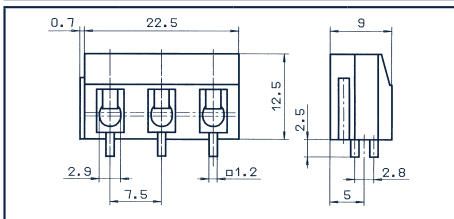

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Wire protection

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

Wire protection

7.50

7.00

2 x 1.20

0.20-4.00

0.20-2.50

0.20-2.50

cULus



B

C

D

300

150

300

750

20

10

10

32

III

22-12

22-12

22-12

4.00

1.60

1.30

1.60

3.00

0.8 / M 3

0.8 / M 3

0.8 / M 3

0.5/M 3

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel

260 °C

3 / 4 s

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10088.1

10088.4

50

3

10089.1

10089.4

50

4

10090.1

10090.4

50

5

10091.1

10091.4

50

6

10092.1

10092.4

50

7

10093.1

10093.4

50

8

10094.1

10094.4

50

9

10095.1

10095.4

50

10

10096.1

10096.4

50

11

10097.1

10097.4

50

12

10098.1

10098.4

50

13

12445.1

12445.4

50

14

12446.1

12446.4

50

15

12447.1

12447.4

50

16

12448.1

12448.4

50

17

12449.1

12449.4

50

18

12450.1

12450.4

50

19

12451.1

12451.4

50

20

12452.1

12452.4

50

21

12453.1

12453.4

50

22

12454.1

12454.4

50

23

12455.1

12455.4

50

24

12456.1

12456.4



50

Accessories

Labelling

Refer to page 186.

Wire protection terminals

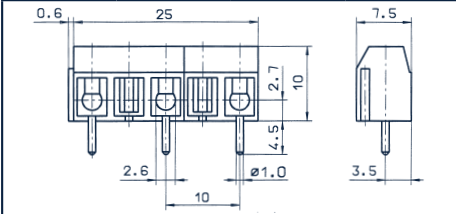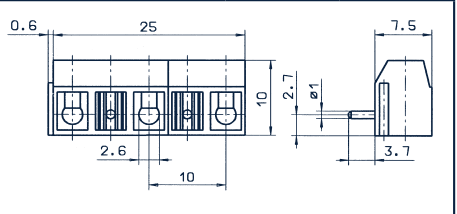
Terminals	PK 500/.../10.00-V	PK 500/.../10.00-H																																																																																																																																																						
 																																																																																																																																																								
Diagrams																																																																																																																																																								
Wire connect type	Wire protection																																																																																																																																																							
Dimensions																																																																																																																																																								
Pitch, mm	10.00																																																																																																																																																							
Stripping length, mm	5.00																																																																																																																																																							
Drill hole diameter, mm	1.30																																																																																																																																																							
Cross-section																																																																																																																																																								
Solid (rigid) mm ²	0.20-1.50																																																																																																																																																							
Finely stranded (flexible) mm ²	0.20-1.50																																																																																																																																																							
Finely stranded (with wire-end ferrule) mm ²	0.20-1.50																																																																																																																																																							
Ratings																																																																																																																																																								
User group																																																																																																																																																								
Rated voltage (V)	300																																																																																																																																																							
Rated current (A)	15																																																																																																																																																							
Overvoltage category	III																																																																																																																																																							
Max. cross-section AWG / mm ²	22-14																																																																																																																																																							
Rated surge voltage (kV)	1.60																																																																																																																																																							
Torque NM / Screw size	0.4 / M 2.6																																																																																																																																																							
Contamination degree	3																																																																																																																																																							
Material																																																																																																																																																								
Insulation material / Flammability class	PA 6.6 / UL 94 V-0																																																																																																																																																							
Temperature range	-40 °C / +105 °C																																																																																																																																																							
Clamping element	Brass																																																																																																																																																							
Screw	Steel																																																																																																																																																							
Wire protection	Stainless steel																																																																																																																																																							
Wave soldering process																																																																																																																																																								
Recommended wave soldering temperature	260 °C																																																																																																																																																							
Recommended wave soldering time, min. / max.	3 / 4 s																																																																																																																																																							
Order information	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 6018) ● (RAL 7016)</td><td></td></tr> <tr><td>2</td><td>10187.1 10187.4</td><td>50</td></tr> <tr><td>3</td><td>10188.1 10188.4</td><td>50</td></tr> <tr><td>4</td><td>10189.1 10189.4</td><td>50</td></tr> <tr><td>5</td><td>10190.1 10190.4</td><td>50</td></tr> <tr><td>6</td><td>10191.1 10191.4</td><td>50</td></tr> <tr><td>7</td><td>10192.1 10192.4</td><td>50</td></tr> <tr><td>8</td><td>10193.1 10193.4</td><td>50</td></tr> <tr><td>9</td><td>10194.1 10194.4</td><td>50</td></tr> <tr><td>10</td><td>10195.1 10195.4</td><td>50</td></tr> <tr><td>11</td><td>10196.1 10196.4</td><td>50</td></tr> <tr><td>12</td><td>10197.1 10197.4</td><td>50</td></tr> <tr><td>13</td><td>13473.1 13473.4</td><td>50</td></tr> <tr><td>14</td><td>13474.1 13474.4</td><td>50</td></tr> <tr><td>15</td><td>13475.1 13475.4</td><td>50</td></tr> <tr><td>16</td><td>13476.1 13476.4</td><td>50</td></tr> <tr><td>17</td><td>13477.1 13477.4</td><td>50</td></tr> <tr><td>18</td><td>13478.1 13478.4</td><td>50</td></tr> <tr><td>19</td><td>13479.1 13479.4</td><td>50</td></tr> <tr><td>20</td><td>13480.1 13480.4</td><td>50</td></tr> <tr><td>21</td><td>13481.1 13481.4</td><td>50</td></tr> <tr><td>22</td><td>13482.1 13482.4</td><td>50</td></tr> <tr><td>23</td><td>13483.1 13483.4</td><td>50</td></tr> <tr><td>24</td><td>13484.1 13484.4</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 6018) ● (RAL 7016)		2	10187.1 10187.4	50	3	10188.1 10188.4	50	4	10189.1 10189.4	50	5	10190.1 10190.4	50	6	10191.1 10191.4	50	7	10192.1 10192.4	50	8	10193.1 10193.4	50	9	10194.1 10194.4	50	10	10195.1 10195.4	50	11	10196.1 10196.4	50	12	10197.1 10197.4	50	13	13473.1 13473.4	50	14	13474.1 13474.4	50	15	13475.1 13475.4	50	16	13476.1 13476.4	50	17	13477.1 13477.4	50	18	13478.1 13478.4	50	19	13479.1 13479.4	50	20	13480.1 13480.4	50	21	13481.1 13481.4	50	22	13482.1 13482.4	50	23	13483.1 13483.4	50	24	13484.1 13484.4	50	<table> <tr> <th>No. of poles</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td></td><td>● (RAL 6018) ● (RAL 7016)</td><td></td></tr> <tr><td>2</td><td>10209.1 10209.4</td><td>50</td></tr> <tr><td>3</td><td>10210.1 10210.4</td><td>50</td></tr> <tr><td>4</td><td>10211.1 10211.4</td><td>50</td></tr> <tr><td>5</td><td>10212.1 10212.4</td><td>50</td></tr> <tr><td>6</td><td>10213.1 10213.4</td><td>50</td></tr> <tr><td>7</td><td>10214.1 10214.4</td><td>50</td></tr> <tr><td>8</td><td>10215.1 10215.4</td><td>50</td></tr> <tr><td>9</td><td>10216.1 10216.4</td><td>50</td></tr> <tr><td>10</td><td>10217.1 10217.4</td><td>50</td></tr> <tr><td>11</td><td>10218.1 10218.4</td><td>50</td></tr> <tr><td>12</td><td>10219.1 10219.4</td><td>50</td></tr> <tr><td>13</td><td>13485.1 13485.4</td><td>50</td></tr> <tr><td>14</td><td>13486.1 13486.4</td><td>50</td></tr> <tr><td>15</td><td>13487.1 13487.4</td><td>50</td></tr> <tr><td>16</td><td>13488.1 13488.4</td><td>50</td></tr> <tr><td>17</td><td>13489.1 13489.4</td><td>50</td></tr> <tr><td>18</td><td>13490.1 13490.4</td><td>50</td></tr> <tr><td>19</td><td>13491.1 13491.4</td><td>50</td></tr> <tr><td>20</td><td>13492.1 13492.4</td><td>50</td></tr> <tr><td>21</td><td>13493.1 13493.4</td><td>50</td></tr> <tr><td>22</td><td>13494.1 13494.4</td><td>50</td></tr> <tr><td>23</td><td>13495.1 13495.4</td><td>50</td></tr> <tr><td>24</td><td>13496.1 13496.4</td><td>50</td></tr> </table>	No. of poles	Cat. no.	Qty.		● (RAL 6018) ● (RAL 7016)		2	10209.1 10209.4	50	3	10210.1 10210.4	50	4	10211.1 10211.4	50	5	10212.1 10212.4	50	6	10213.1 10213.4	50	7	10214.1 10214.4	50	8	10215.1 10215.4	50	9	10216.1 10216.4	50	10	10217.1 10217.4	50	11	10218.1 10218.4	50	12	10219.1 10219.4	50	13	13485.1 13485.4	50	14	13486.1 13486.4	50	15	13487.1 13487.4	50	16	13488.1 13488.4	50	17	13489.1 13489.4	50	18	13490.1 13490.4	50	19	13491.1 13491.4	50	20	13492.1 13492.4	50	21	13493.1 13493.4	50	22	13494.1 13494.4	50	23	13495.1 13495.4	50	24	13496.1 13496.4	50
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 6018) ● (RAL 7016)																																																																																																																																																							
2	10187.1 10187.4	50																																																																																																																																																						
3	10188.1 10188.4	50																																																																																																																																																						
4	10189.1 10189.4	50																																																																																																																																																						
5	10190.1 10190.4	50																																																																																																																																																						
6	10191.1 10191.4	50																																																																																																																																																						
7	10192.1 10192.4	50																																																																																																																																																						
8	10193.1 10193.4	50																																																																																																																																																						
9	10194.1 10194.4	50																																																																																																																																																						
10	10195.1 10195.4	50																																																																																																																																																						
11	10196.1 10196.4	50																																																																																																																																																						
12	10197.1 10197.4	50																																																																																																																																																						
13	13473.1 13473.4	50																																																																																																																																																						
14	13474.1 13474.4	50																																																																																																																																																						
15	13475.1 13475.4	50																																																																																																																																																						
16	13476.1 13476.4	50																																																																																																																																																						
17	13477.1 13477.4	50																																																																																																																																																						
18	13478.1 13478.4	50																																																																																																																																																						
19	13479.1 13479.4	50																																																																																																																																																						
20	13480.1 13480.4	50																																																																																																																																																						
21	13481.1 13481.4	50																																																																																																																																																						
22	13482.1 13482.4	50																																																																																																																																																						
23	13483.1 13483.4	50																																																																																																																																																						
24	13484.1 13484.4	50																																																																																																																																																						
No. of poles	Cat. no.	Qty.																																																																																																																																																						
	● (RAL 6018) ● (RAL 7016)																																																																																																																																																							
2	10209.1 10209.4	50																																																																																																																																																						
3	10210.1 10210.4	50																																																																																																																																																						
4	10211.1 10211.4	50																																																																																																																																																						
5	10212.1 10212.4	50																																																																																																																																																						
6	10213.1 10213.4	50																																																																																																																																																						
7	10214.1 10214.4	50																																																																																																																																																						
8	10215.1 10215.4	50																																																																																																																																																						
9	10216.1 10216.4	50																																																																																																																																																						
10	10217.1 10217.4	50																																																																																																																																																						
11	10218.1 10218.4	50																																																																																																																																																						
12	10219.1 10219.4	50																																																																																																																																																						
13	13485.1 13485.4	50																																																																																																																																																						
14	13486.1 13486.4	50																																																																																																																																																						
15	13487.1 13487.4	50																																																																																																																																																						
16	13488.1 13488.4	50																																																																																																																																																						
17	13489.1 13489.4	50																																																																																																																																																						
18	13490.1 13490.4	50																																																																																																																																																						
19	13491.1 13491.4	50																																																																																																																																																						
20	13492.1 13492.4	50																																																																																																																																																						
21	13493.1 13493.4	50																																																																																																																																																						
22	13494.1 13494.4	50																																																																																																																																																						
23	13495.1 13495.4	50																																																																																																																																																						
24	13496.1 13496.4	50																																																																																																																																																						
Accessories																																																																																																																																																								
Labelling	Refer to page 186.																																																																																																																																																							

Terminals





10.00 mm

PK 500/.../10.00-V-BL

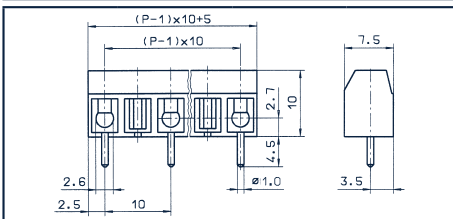

PK 100/.../10.00-V

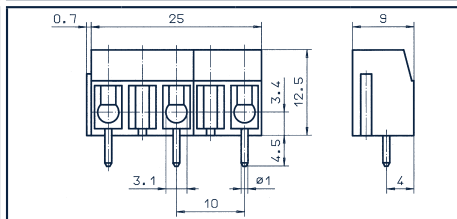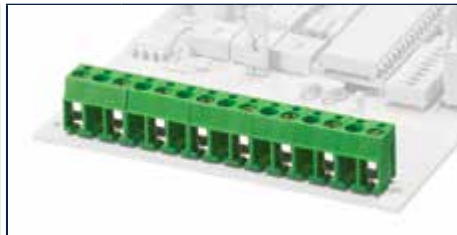

Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Wire protection

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

Wire protection

10.00

5.00

1.30

0.20-1.50

0.20-1.50

0.20-1.50

cULus

B

C

D



300

150

300

1000

15

15

10

17.5

III

22-14

22-14

22-14

1.50

1.60

1.30

1.60

3.50

0.4 / M 2.6

0.4 / M 2.6

0.4 / M 2.6

0.4/M 2.6

3

Wire protection

10.00

7.00

1.30

0.20-2.50

0.20-2.50

0.20-2.50

cULus

B

C

D



300

150

300

1000

20

20

10

24

III

22-12

22-12

22-12

2.50

1.60

1.30

1.60

3.50

0.45 / M 3

0.45 / M 3

0.45 / M 3

0.5/M 3

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel

260 °C

3 / 4 s

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10242.1

10242.4

50

3

10243.1

10243.4

50

4

10244.1

10244.4

50

5

10245.1

10245.4

50

6

10246.1

10246.4

50

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10023.1

10023.4

50

3

10024.1

10024.4

50

4

10025.1

10025.4

50

5

10026.1

10026.4

50

6

10027.1

10027.4

50

7

10028.1

10028.4

50

8

10029.1

10029.4

50

9

10030.1

10030.4

50

10

10031.1

10031.4

50

11

10032.1

10032.4

50

12

10033.1

10033.4

50

13

13497.1

13497.4

50

14

13498.1

13498.4

50

15

13499.1

13499.4

50

16

13500.1

13500.4

50

17

13501.1

13501.4

50

18

13502.1

13502.4

50

19

13503.1

13503.4

50

20

13504.1

13504.4

50

21

13505.1

13505.4

50

22

13506.1

13506.4

50

23

13507.1

13507.4

50

24

13508.1

13508.4

50



Accessories

Labelling

Refer to page 186.

Refer to page 186.

Wire protection terminals

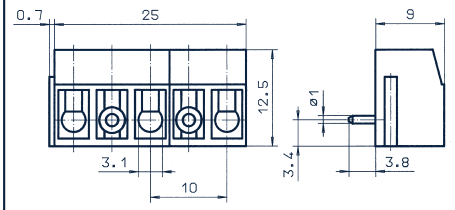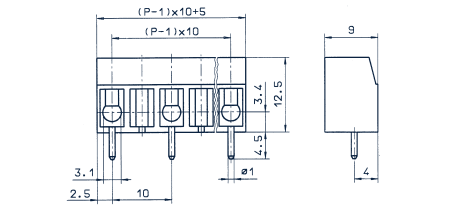Terminals	PK 100/.../10.00-H	PK 100/.../10.00-V-BL																																																																																																																																
 10.00 mm																																																																																																																																		
Diagrams																																																																																																																																		
Wire connect type	Wire protection																																																																																																																																	
Dimensions																																																																																																																																		
Pitch, mm	10.00																																																																																																																																	
Stripping length, mm	6.00																																																																																																																																	
Drill hole diameter, mm	1.30																																																																																																																																	
Cross-section																																																																																																																																		
Solid (rigid) mm²	0.20-2.50																																																																																																																																	
Finely stranded (flexible) mm²	0.20-2.50																																																																																																																																	
Finely stranded (with wire-end ferrule) mm²	0.20-2.50																																																																																																																																	
Ratings																																																																																																																																		
User group																																																																																																																																		
Rated voltage (V)	300																																																																																																																																	
Rated current (A)	20																																																																																																																																	
Overvoltage category	III																																																																																																																																	
Max. cross-section AWG / mm²	22-12																																																																																																																																	
Rated surge voltage (kV)	1.60																																																																																																																																	
Torque NM / Screw size	0.45 / M 3																																																																																																																																	
Contamination degree	3																																																																																																																																	
Material																																																																																																																																		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0																																																																																																																																	
Temperature range	-40 °C / +105 °C																																																																																																																																	
Clamping element	Brass																																																																																																																																	
Screw	Steel																																																																																																																																	
Wire protection	Stainless steel																																																																																																																																	
Wave soldering process																																																																																																																																		
Recommended wave soldering temperature	260 °C																																																																																																																																	
Recommended wave soldering time, min. / max.	3 / 4 s																																																																																																																																	
Order information	<table><tr><th>No. of poles</th><th>Cat. no.</th><th></th><th>Qty.</th></tr><tr><td></td><td>● (RAL 6018)</td><td>● (RAL 7016)</td><td></td></tr><tr><td>2</td><td>10034.1</td><td>10034.4</td><td>50</td></tr><tr><td>3</td><td>10035.1</td><td>10035.4</td><td>50</td></tr><tr><td>4</td><td>10036.1</td><td>10036.4</td><td>50</td></tr><tr><td>5</td><td>10037.1</td><td>10037.4</td><td>50</td></tr><tr><td>6</td><td>10038.1</td><td>10038.4</td><td>50</td></tr><tr><td>7</td><td>10039.1</td><td>10039.4</td><td>50</td></tr><tr><td>8</td><td>10040.1</td><td>10040.4</td><td>50</td></tr><tr><td>9</td><td>10041.1</td><td>10041.4</td><td>50</td></tr><tr><td>10</td><td>10042.1</td><td>10042.4</td><td>50</td></tr><tr><td>11</td><td>10043.1</td><td>10043.4</td><td>50</td></tr><tr><td>12</td><td>10044.1</td><td>10044.4</td><td>50</td></tr><tr><td>13</td><td>13509.1</td><td>13509.4</td><td>50</td></tr><tr><td>14</td><td>13510.1</td><td>13510.4</td><td>50</td></tr><tr><td>15</td><td>13511.1</td><td>13511.4</td><td>50</td></tr><tr><td>16</td><td>13512.1</td><td>13512.4</td><td>50</td></tr><tr><td>17</td><td>13513.1</td><td>13513.4</td><td>50</td></tr><tr><td>18</td><td>13514.1</td><td>13514.4</td><td>50</td></tr><tr><td>19</td><td>13515.1</td><td>13515.4</td><td>50</td></tr><tr><td>20</td><td>13516.1</td><td>13516.4</td><td>50</td></tr><tr><td>21</td><td>13517.1</td><td>13517.4</td><td>50</td></tr><tr><td>22</td><td>13518.1</td><td>13518.4</td><td>50</td></tr><tr><td>23</td><td>13519.1</td><td>13519.4</td><td>50</td></tr><tr><td>24</td><td>13520.1</td><td>13520.4</td><td>50</td></tr></table>	No. of poles	Cat. no.		Qty.		● (RAL 6018)	● (RAL 7016)		2	10034.1	10034.4	50	3	10035.1	10035.4	50	4	10036.1	10036.4	50	5	10037.1	10037.4	50	6	10038.1	10038.4	50	7	10039.1	10039.4	50	8	10040.1	10040.4	50	9	10041.1	10041.4	50	10	10042.1	10042.4	50	11	10043.1	10043.4	50	12	10044.1	10044.4	50	13	13509.1	13509.4	50	14	13510.1	13510.4	50	15	13511.1	13511.4	50	16	13512.1	13512.4	50	17	13513.1	13513.4	50	18	13514.1	13514.4	50	19	13515.1	13515.4	50	20	13516.1	13516.4	50	21	13517.1	13517.4	50	22	13518.1	13518.4	50	23	13519.1	13519.4	50	24	13520.1	13520.4	50	<table><tr><th>No. of poles</th><th>Cat. no.</th><th></th><th>Qty.</th></tr><tr><td></td><td>● (RAL 6018)</td><td>● (RAL 7016)</td><td></td></tr><tr><td>2</td><td>10067.1</td><td>10067.4</td><td>50</td></tr><tr><td>3</td><td>10068.1</td><td>10068.4</td><td>50</td></tr><tr><td>4</td><td>10069.1</td><td>10069.4</td><td>50</td></tr><tr><td>5</td><td>10070.1</td><td>10070.4</td><td>50</td></tr><tr><td>6</td><td>10071.1</td><td>10071.4</td><td>50</td></tr></table>	No. of poles	Cat. no.		Qty.		● (RAL 6018)	● (RAL 7016)		2	10067.1	10067.4	50	3	10068.1	10068.4	50	4	10069.1	10069.4	50	5	10070.1	10070.4	50	6	10071.1	10071.4	50
No. of poles	Cat. no.		Qty.																																																																																																																															
	● (RAL 6018)	● (RAL 7016)																																																																																																																																
2	10034.1	10034.4	50																																																																																																																															
3	10035.1	10035.4	50																																																																																																																															
4	10036.1	10036.4	50																																																																																																																															
5	10037.1	10037.4	50																																																																																																																															
6	10038.1	10038.4	50																																																																																																																															
7	10039.1	10039.4	50																																																																																																																															
8	10040.1	10040.4	50																																																																																																																															
9	10041.1	10041.4	50																																																																																																																															
10	10042.1	10042.4	50																																																																																																																															
11	10043.1	10043.4	50																																																																																																																															
12	10044.1	10044.4	50																																																																																																																															
13	13509.1	13509.4	50																																																																																																																															
14	13510.1	13510.4	50																																																																																																																															
15	13511.1	13511.4	50																																																																																																																															
16	13512.1	13512.4	50																																																																																																																															
17	13513.1	13513.4	50																																																																																																																															
18	13514.1	13514.4	50																																																																																																																															
19	13515.1	13515.4	50																																																																																																																															
20	13516.1	13516.4	50																																																																																																																															
21	13517.1	13517.4	50																																																																																																																															
22	13518.1	13518.4	50																																																																																																																															
23	13519.1	13519.4	50																																																																																																																															
24	13520.1	13520.4	50																																																																																																																															
No. of poles	Cat. no.		Qty.																																																																																																																															
	● (RAL 6018)	● (RAL 7016)																																																																																																																																
2	10067.1	10067.4	50																																																																																																																															
3	10068.1	10068.4	50																																																																																																																															
4	10069.1	10069.4	50																																																																																																																															
5	10070.1	10070.4	50																																																																																																																															
6	10071.1	10071.4	50																																																																																																																															
Accessories																																																																																																																																		
Labelling	Refer to page 186.																																																																																																																																	

Terminals




10.00 mm

PK 100/.../10.00-H-BL



Diagrams

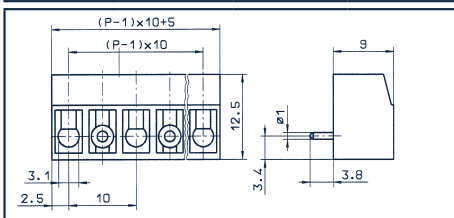

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Wire protection

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

Wire protection

10.00

6.00

1.30

0.20-2.50

0.20-2.50

0.20-2.50

cULus



B

C

D

300

150

300

1000

20

20

10

24

III

22-12

22-12

22-12

2.50

1.60

1.30

1.60

3.50

0.45 / M 3

0.45 / M 3

0.45 / M 3

0.5/M 3

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Stainless steel

260 °C

3 / 4 s

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

10072.1

10072.4

50

3

10073.1

10073.4

50

4

10074.1

10074.4

50

5

10075.1

10075.4

50

6

10076.1

10076.4

50

Accessories

Labelling

Refer to page 186.

Wire protection terminals

Terminals




10.16 mm




Diagrams

PK 500/.../10.16-V

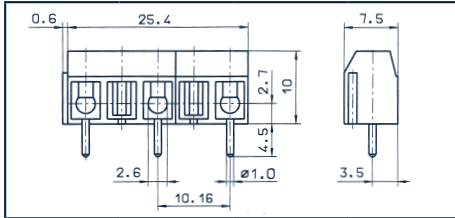

PK 500/.../10.16-H

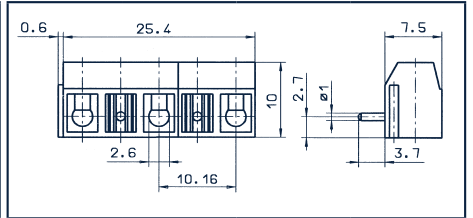

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section AWG / mm²

Rated surge voltage (kV)

Torque NM / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Wire protection

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min. / max.

Order information

No. of poles	Cat. no.	Qty.	No. of poles	Cat. no.	Qty.
	● (RAL 6018) ● (RAL 7016)			● (RAL 6018) ● (RAL 7016)	
2	10198.1 10198.4	50	2	10220.1 10220.4	50
3	10199.1 10199.4	50	3	10221.1 10221.4	50
4	10200.1 10200.4	50	4	10222.1 10222.4	50
5	10201.1 10201.4	50	5	10223.1 10223.4	50
6	10202.1 10202.4	50	6	10224.1 10224.4	50
7	10203.1 10203.4	50	7	10225.1 10225.4	50
8	10204.1 10204.4	50	8	10226.1 10226.4	50
9	10205.1 10205.4	50	9	10227.1 10227.4	50
10	10206.1 10206.4	50	10	10228.1 10228.4	50
11	10207.1 10207.4	50	11	10229.1 10229.4	50
12	10208.1 10208.4	50	12	10230.1 10230.4	50
13	13521.1 13521.4	50	13	13533.1 13533.4	50
14	13522.1 13522.4	50	14	13534.1 13534.4	50
15	13523.1 13523.4	50	15	13535.1 13535.4	50
16	13524.1 13524.4	50	16	13536.1 13536.4	50
17	13525.1 13525.4	50	17	13537.1 13537.4	50
18	13526.1 13526.4	50	18	13538.1 13538.4	50
19	13527.1 13527.4	50	19	13539.1 13539.4	50
20	13528.1 13528.4	50	20	13540.1 13540.4	50
21	13529.1 13529.4	50	21	13541.1 13541.4	50
22	13530.1 13530.4	50	22	13542.1 13542.4	50
23	13531.1 13531.4	50	23	13543.1 13543.4	50
24	13532.1 13532.4	50	24	13544.1 13544.4	50

Accessories

Labelling

Refer to page 186.

Refer to page 186.

Notes

A large rectangular area filled with a uniform grid of small, light-gray dotted lines, intended for handwritten notes.

With many available combination options, our broadly diversified line of connectors provides convenient wire termination options for every purpose and every mounting situation. The male headers are available with open or closed side walls, in single- or double-level versions, with horizontal or vertical connections, and with or without screw flange.

Drahtschutz / Wire-protection

Zugbügel / S

PKB 1350/6/3,50

PKB 130/4/5,00

PKB 130/4/10,00

PKF 1500/6/3,81

PKF 1550/5/3,81

PKF 1550/4/3,81-F

PKL 1500/6/3,81

PKM 1500/6/3,81

PKN 1500/6/3,81

PKO 1500/6/3,81

PKP 1500/6/3,81

PKQ 1500/6/3,81

PKR 1500/6/3,81

PKS 1500/6/3,81

PKT 1500/6/3,81

PKU 1500/6/3,81

PKV 1500/6/3,81

PKW 1500/6/3,81


PKX 1500/6/3,81

PKY 1500/6/3,81

PKZ 1500/6/3,81



- Push-in, tension-spring or screw-connection wire termination systems
- Wire cross-section up to 2.5 mm²
- Material: PA 6.6 UL 94 V-0
- Up to 24 poles
- Good electrical and mechanical characteristics
- With or without flange

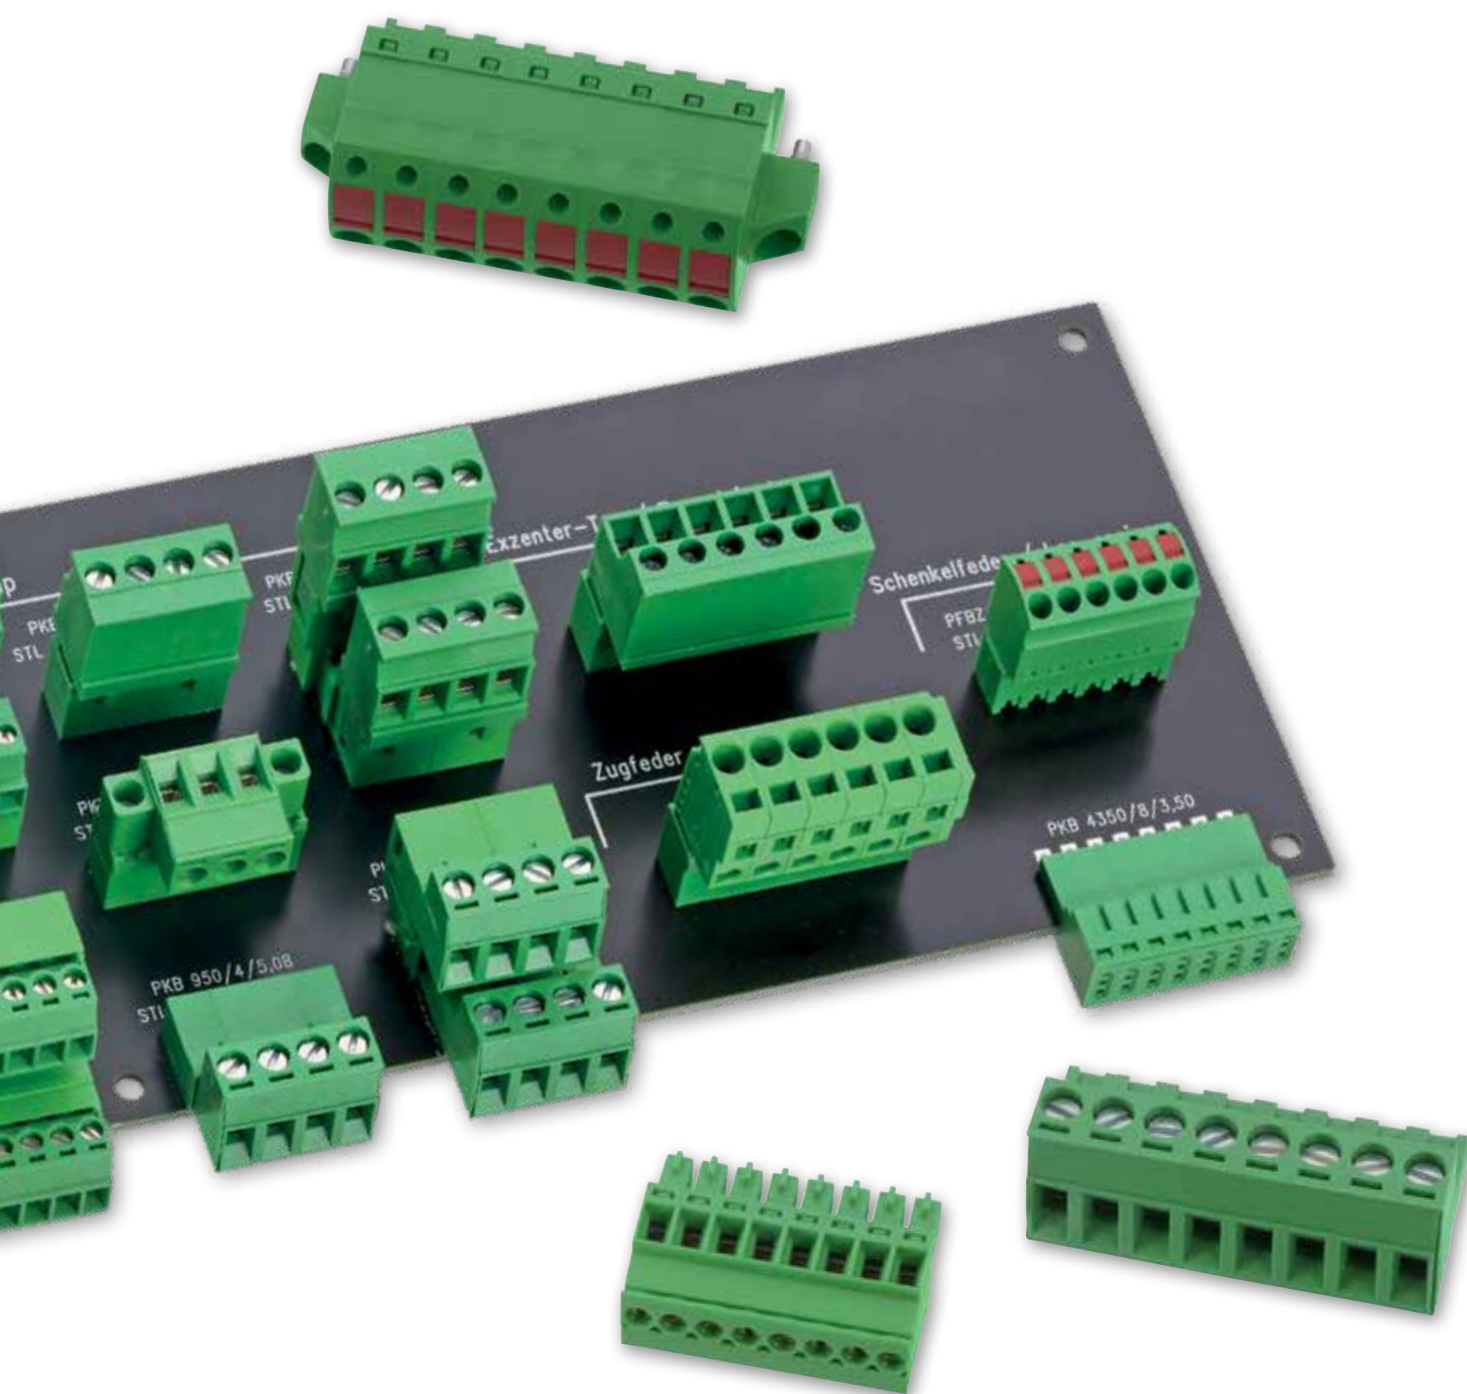

Matrix of PCB plug-in connector combinations

		Male pin block																							
Female socket block	Connection type		Article short name																						
		Pitch	STL 1550 V-G STL 1550 H-G STL 1550 V-F STL 1550 H-F STL 1541 V-G STL 1541 H-G STL 1550 V-FR STL 1550 H-FR STL 1541 V-FR STL 1541 H-FR STL 1550 V-G STL 1550 H-G STL 1550 V-F STL 1550 H-F STL 1590 G STL 1570 V-G STL 1570 H-G STL 950 V STL 950 H STL 950 V-G																						
			3.50 mm 3.50 mm 3.50 mm 3.50 mm 3.50 mm 3.50 mm 3.50 mm 3.50 mm 3.50 mm 3.50 mm 3.81 mm 3.81 mm 3.81 mm 3.81 mm 3.81 mm 3.81 mm 3.81 mm 5.00 mm 5.00 mm 5.00 mm																						
			Flange option																						
			Catalogue page																						
					134	134	135	135	136	136	137	137	138	138	139	139	140	140	141	142	142	143	143	145	
		PFB 4541-KD	3.50 mm	88	●	●			●	●															
		PFB 4541-FRKD	3.50 mm	88	●						●	●	●	●											
		PFB 4551-KD	3.50 mm	89	●	●																			
		PFB 4551-FKD	3.50 mm	89			●	●																	
		PFB 4561-KD	3.50 mm	90	●	●																			
		PFB 4561-FKD	3.50 mm	90			●	●																	
		PFBZ 4551-KD	3.81 mm	91											●	●			●	●	●				
		PFBZ 4551-FKD	3.81 mm	91													●	●							
		PFBZ 4561-KD	3.81 mm	92											●	●			●	●	●				
		PFBZ 4561-FKD	3.81 mm	92													●	●							
		PFB 4951-KD	5.00 mm	93																		●	●	●	
		PFB 4951-FKD	5.00 mm	93																					
		PFBZ 4951-KD	5.08 mm	94																					
		PFBZ 4951-FKD	5.08 mm	94																					
		PFBZ 4961-KD	7.62 mm	95																					
		PFBZ 4961-FKD	7.62 mm	95																					
		PFBZ 4551-KD	7.62 mm	96																					
		PFBZ 4551-FKD	7.62 mm	96																					
		PKB 4350	3.50 mm	97																					
		PZB 3950	5.00 mm	98																		●	●	●	



STL 950 H-G	STL 950 V-F	STL 950 H-F	STL 975 V-G	STL 975 H-G	STL 950 V	STL 950 H	STL 950 V-G	STL 950 H-G	STL 950 V-F	STL 950 H-F	STL 990 G	STL 970 V	STL 970 H	STL 970 V-G	STL 970 H-G	STL 970 V-F	STL 970 H-F	STL 960 V	STL 960 H	STL 960 V-G	STL 960 H-G	STLZ 965 V-F	STLZ 965 H-F	STLZ 1550 V-G	STLZ 1550 H-G	STLZ 1550 V-F	STLZ 1550 H-F	
5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	
	●	●							●	●							●	●									●	●



Push-in principle





Tension-spring termination

Push-in female socket blocks


Female socket block



PFB 4541/.../3.50-KD

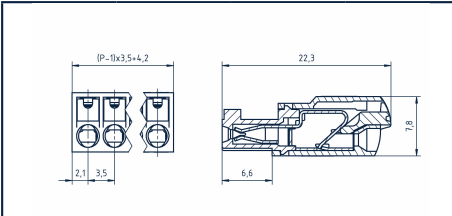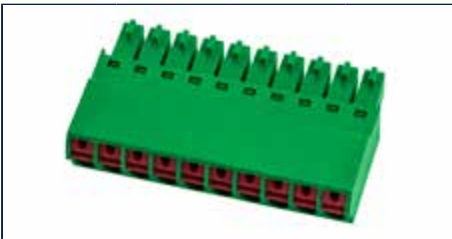

PFB 4541/... /3.50-FRKD

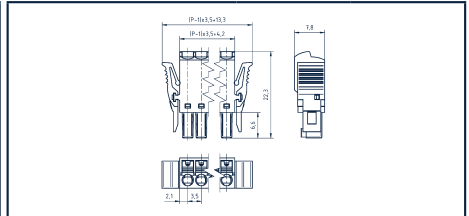

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Spring

Contact spring

Order information

Standard colour(s)

Other colours on request.

Accessories

Labelling

Matching counterparts

Push-in

3.50

10.00

0.20-1.50

0.20-1.50

0.25-1.50

cULus*

VDE*

B

C

D

320

8

8

II

24-16

24-16

24-16

0.20-1.50

1.30

1.10

1.30

2.50

2

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Stainless steel

Tin-plated

No. of poles

Cat. no.

Qty.

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

31632.1

31633.1

31634.1

31635.1

31636.1

31637.1

31638.1

31639.1

31640.1

31641.1

31642.1

31643.1

31644.1

31645.1

31646.1

31647.1

31648.1

31649.1

31650.1

No. of poles

Cat. no.

Qty.

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

31652.1

31653.1

31654.1

31655.1

31656.1

31657.1

31658.1

31659.1

31660.1

31661.1

31662.1

31663.1

31664.1

31665.1

31666.1

31667.1

31668.1

31669.1

31670.1

Push-in

3.50

10.00

0.20-1.50

0.20-1.50

0.25-1.50

cULus*

VDE*

B

C

D

320

8

8

II

24-16

24-16

24-16

0.20-1.50

1.30

1.10

1.30

2.50

2

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Stainless steel

Tin-plated

No. of poles

Cat. no.

Qty.

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

31652.1

31653.1

31654.1

31655.1

31656.1

31657.1

31658.1

31659.1

31660.1

31661.1

31662.1

31663.1

31664.1

31665.1

31666.1

31667.1

31668.1

31669.1



31670.1

* Approvals applied for



Female socket block



PFB 4551/.../3.50-KD

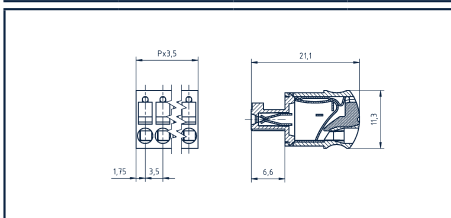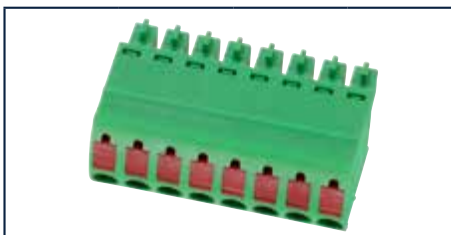

PFB 4551/.../3.50-FKD

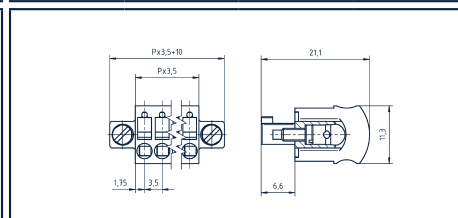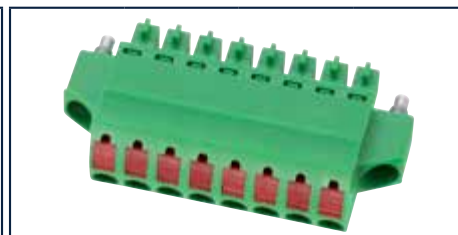

Diagrams

Connection type

Push-in

Push-in

Dimensions

Pitch, mm

3.50

3.50

Stripping length, mm

11.00

11.00

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²

0.14-2.50

0.14-2.50

Finely stranded (flexible) mm²

0.14-1.50

0.14-1.50

Finely stranded (with wire-end ferrule) mm²

0.25-1.00

0.25-1.00

Ratings

User group

Rated voltage (V)

B	C	D	VDE*
300		300	160
10		10	10
			III

B	C	D	VDE*
300		300	160
10		10	10
			III

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Flange/threaded insert

Spring

Contact spring

Order information

Standard colour(s)

Other colours on request.

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	30262.1	50
3	30263.1	50
4	30264.1	50
5	30265.1	50
6	30266.1	50
7	30267.1	50
8	30268.1	50
9	30269.1	50
10	30270.1	50
11	30271.1	50
12	30272.1	50
13	30273.1	50
14	30274.1	50
15	30275.1	50
16	30276.1	50
17	30277.1	50
18	30278.1	50
19	30279.1	50
20	30280.1	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	30282.1	50
3	30283.1	50
4	30284.1	50
5	30285.1	50
6	30286.1	50
7	30287.1	50
8	30288.1	50
9	30289.1	50
10	30290.1	50
11	30291.1	50
12	30292.1	50
13	30293.1	50
14	30294.1	50
15	30295.1	50
16	30296.1	50
17	30297.1	50
18	30298.1	50
19	30299.1	50
20	30300.1	50

Accessories

Labelling

Matching counterparts

Refer to page 186.

Refer to page 186.

Refer to matrix on page 86-87

Refer to matrix on page 86-87

* Approvals applied for



Push-in female socket blocks

Female socket block



3.50 mm

Diagrams



Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Flange/threaded insert

Spring

Contact spring

Order information

Standard colour(s)



Other colours on request.

Accessories

Labelling

Matching counterparts

PFB 4561/.../3.50-KD



Push-in

3.50

11.00

0.14-2.50

0.14-1.50

0.25-1.00

cULus*

VDE*

B

C

D

300

10

300

10

III

26-16

1.60

2.50

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Stainless steel

Copper alloy

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

30302.1

50

3

30303.1

50

4

30304.1

50

5

30305.1

50

6

30306.1

50

7

30307.1

50

8

30308.1

50

9

30309.1

50

10

30310.1

50

11

30311.1

50

12

30312.1

50

13

30313.1

50

14

30314.1

50

15

30315.1

50

16

30316.1

50

17

30317.1

50

18

30318.1

50

19

30319.1



50

20

30320.1

50

PFB 4561/.../3.50-FKD

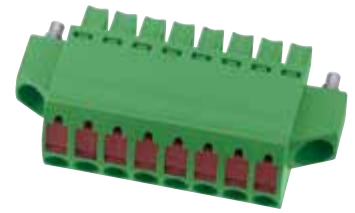

Push-in

3.50

11.00

0.14-2.50

0.14-1.50

0.25-1.00

cULus*

VDE*

B

C

D

300

10

300

10

III

26-16

1.60

2.50

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Steel

Stainless steel

Copper alloy

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

30322.1

50

3

30323.1

50

4

30324.1

50

5

30325.1

50

6

30326.1

50

7

30327.1

50

8

30328.1

50

9

30329.1

50

10

30330.1

50

11

30331.1

50

12

30332.1

50

13

30333.1

50

14

30334.1

50

15

30335.1

50

16

30336.1

50

17

30337.1

50

18

30338.1

50

19

30339.1

50

20



30340.1

50



Female socket block



PFBZ 4551/... /3.81-KD

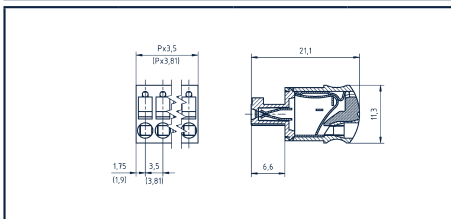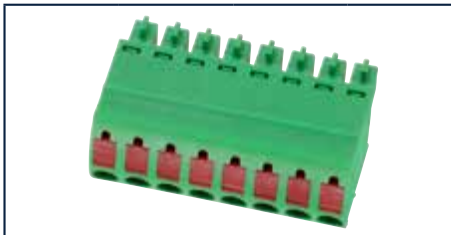

PFB 4551/.../3.81-FKD

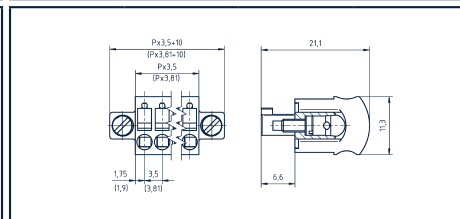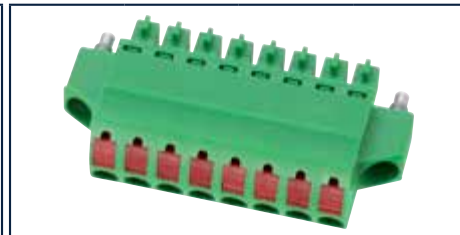

Diagrams

Connection type

Push-in

Push-in

Dimensions

Pitch, mm

3.81

3.81

Stripping length, mm

11.00

11.00

Cross-section

Solid (rigid) mm²

0.14-2.50

0.14-2.50

Finely stranded (flexible) mm²

0.14-1.50

0.14-1.50

Finely stranded (with wire-end ferrule) mm²

0.25-1.00

0.25-1.00

Ratings

User group

cULus*		VDE*	
B	C	D	
300		300	160
10		10	10
			III
26-16		26-16	0.14-1.50
1.60		1.60	2.50
			3

cULus*		VDE*	
B	C	D	
300		300	160
10		10	10
			III
26-16		26-16	0.14-1.50
1.60		1.60	2.50
			3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Flange/threaded insert

Steel

Spring

Contact spring

Stainless steel

Stainless steel

Copper alloy

Copper alloy

Order information

Standard colour(s)

Other colours on request.

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	14000.1	50
3	14001.1	50
4	14002.1	50
5	14003.1	50
6	14004.1	50
7	14005.1	50
8	14006.1	50
9	14007.1	50
10	14008.1	50
11	14009.1	50
12	14010.1	50
13	14011.1	50
14	14012.1	50
15	14013.1	50
16	14014.1	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	14015.1	50
3	14016.1	50
4	14017.1	50
5	14018.1	50
6	14019.1	50
7	14020.1	50
8	14021.1	50
9	14022.1	50
10	14023.1	50
11	14024.1	50
12	14025.1	50
13	14026.1	50
14	14027.1	50
15	14028.1	50
16	14029.1	50

Accessories

Labelling

Refer to page 186.



Refer to page 186.

Matching counterparts



Refer to matrix on page 86-87

Refer to matrix on page 86-87

PFBZ 4561/.../3.81-FKD

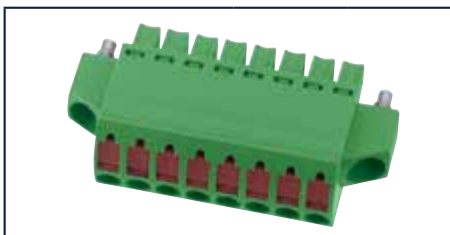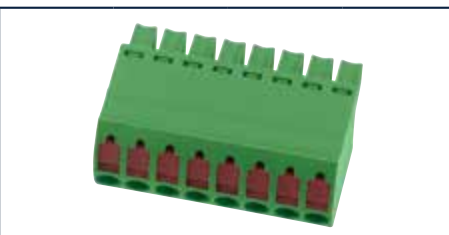

Diagrams

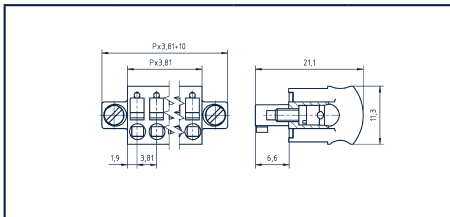
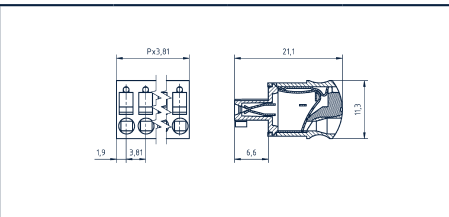


* Approvals applied for



Female socket block



PFB 4951/.../5.00-KD

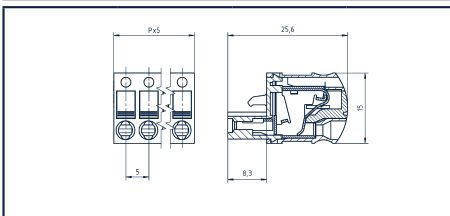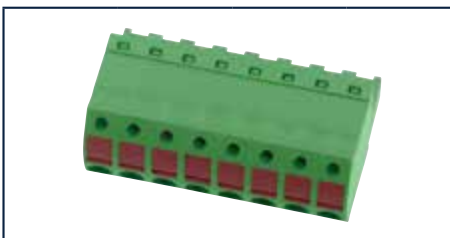

PFB 4951/.../5.00-FKD

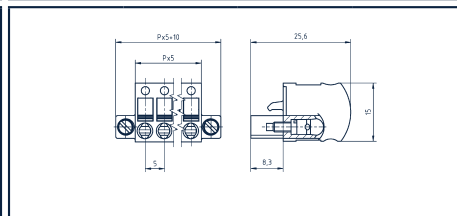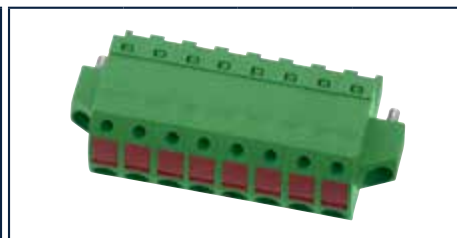

Diagrams

Connection type

Push-in

Push-in

Dimensions

Pitch, mm

5.00

5.00

Stripping length, mm

12.00

12.00

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²

0.20-2.50

0.20-2.50

Finely stranded (flexible) mm²

0.20-2.50

0.20-2.50

Finely stranded (with wire-end ferrule) mm²

0.25-2.50

0.25-2.50

Ratings

User group

Rated voltage (V)

300

300

300

250

Rated current (A)

10

10

10

12

Overvoltage category

III

III

Max. cross-section, AWG/mm²

26-12

26-12

0.20-2.50

26-16

26-16

0.20-2.50

Rated surge voltage, kV

1.60

1.60

4

1.60

1.60

4

Contamination degree

3

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Flange/threaded insert

Steel

Spring

Stainless steel

Stainless steel

Contact spring

Copper alloy

Copper alloy

Order information

Standard colour(s)

No. of poles

Cat. no.

Qty.

Other colours on request.

2

● (RAL 6018)

50

3

30383.1

50

4

30384.1

50

5

30385.1

50

6

30386.1

50

7

30387.1

50

8

30388.1

50

9

30389.1

50

10

30390.1

50

11

30391.1

50

12

30392.1

50

13

30393.1

50

14

30394.1

50

15

30395.1

50

16

30396.1

50

17

30397.1

50

18

30398.1

50

19

30399.1

50

20

30400.1

50

21

30401.1

50

22

30402.1

50

23

30403.1

50

24

30404.1

50

No. of poles

Cat. no.

Qty.

2

● (RAL 6018)

50

3

30442.1

50

4

30443.1

50

5

30444.1

50

6

30445.1

50

7

30446.1

50

8

30447.1

50

9

30448.1

50

10

30449.1

50

11

30450.1

50

12

30451.1

50

13

30452.1

50

14

30453.1

50

15

30454.1

50

16

30455.1

50

17

30456.1

50

18

30457.1

50

19

30458.1

50

20

30459.1

50

21

30460.1

50

22

30461.1

50

23

30462.1

50

24

30463.1

50

Accessories

Coding system

Cat. no.

Qty.

Labelling

Matching counterparts

K1 RD

12002.9

100

Refer to page 186.

Refer to matrix on page 86-87

K1 RD





12002.9

100

Refer to page 186.

Refer to matrix on page 86-87


Push-in female socket blocks

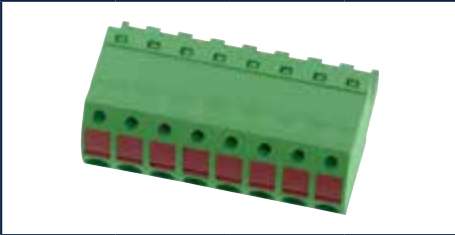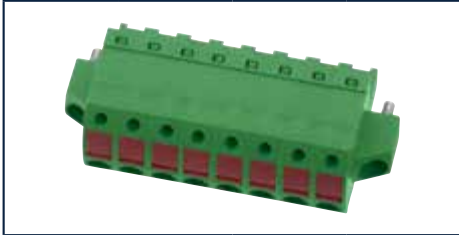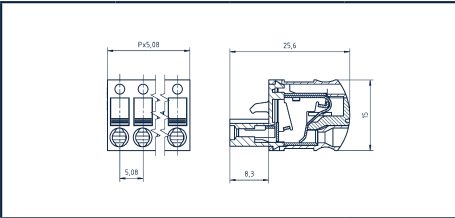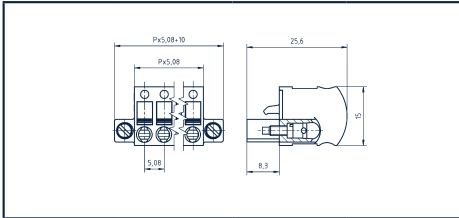Female socket block		PFBZ 4951/... /5.08-KD	PFBZ 4951/.../5.08-FKD
			
Diagrams			
Connection type		Push-in	Push-in
Dimensions			
Pitch, mm		5.08	5.08
Stripping length, mm		12.00	12.00
Drill hole diameter, mm			
Cross-section			
Solid (rigid) mm ²		0.20-2.50	0.20-2.50
Finely stranded (flexible) mm ²		0.20-2.50	0.20-2.50
Finely stranded (with wire-end ferrule) mm ²		0.25-2.50	0.25-2.50
Ratings			
User group			
Rated voltage (V)		300	300
Rated current (A)		10	10
Overvoltage category		III	III
Max. cross-section, AWG/mm ²		26-12	26-16
Rated surge voltage, kV		1.60	1.60
Contamination degree		3	3
Material			
Insulation material / Flammability class		PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range		-40 °C / +105 °C	-40 °C / +105 °C
Flange/threaded insert			Steel
Spring		Stainless steel	Stainless steel
Contact spring		Copper alloy	Copper alloy
Order information			
Standard colour(s)		No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
Other colours on request.		● (RAL 6018)	● (RAL 6018)
		2 30412.1 50	2 30472.1 50
		3 30413.1 50	3 30473.1 50
		4 30414.1 50	4 30474.1 50
		5 30415.1 50	5 30475.1 50
		6 30416.1 50	6 30476.1 50
		7 30417.1 50	7 30477.1 50
		8 30418.1 50	8 30478.1 50
		9 30419.1 50	9 30479.1 50
		10 30420.1 50	10 30480.1 50
		11 30421.1 50	11 30481.1 50
		12 30422.1 50	12 30482.1 50
		13 30423.1 50	13 30483.1 50
		14 30424.1 50	14 30484.1 50
		15 30425.1 50	15 30485.1 50
		16 30426.1 50	16 30486.1 50
		17 30427.1 50	17 30487.1 50
		18 30428.1 50	18 30488.1 50
		19 30429.1 50	19 30489.1 50
		20 30430.1 50	20 30490.1 50
		21 30431.1 50	21 30491.1 50
		22 30432.1 50	22 30492.1 50
		23 30433.1 50	23 30493.1 50
		24 30434.1 50	24 30494.1 50
Accessories			
Coding system			
Cat. no.	Qty.	K1 RD 12002.9 100	K1 RD 12002.9 100
Labelling		Refer to page 186.	Refer to page 186.
Matching counterparts		Refer to matrix on page 86-87	Refer to matrix on page 86-87


Female socket block



PFBZ 4961/.. /7.62-KD

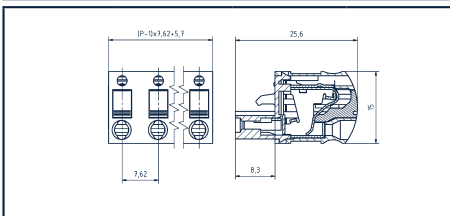

PFBZ 4961/.. /7.62-FKD

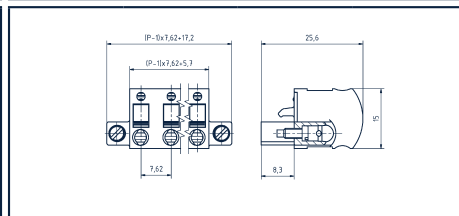

Diagrams

Connection type

Push-in

Push-in

Dimensions

Pitch, mm

7.62

7.62

Stripping length, mm

12.00

12.00

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²

0.20-2.50

0.20-2.50

Finely stranded (flexible) mm²

0.20-2.50

0.20-2.50

Finely stranded (with wire-end ferrule) mm²

0.25-2.50

0.25-2.50

Ratings

User group

Rated voltage (V)

B

C

D

VDE*

300

300

400

Rated current (A)

10

10

12

Overvoltage category

III

Max. cross-section, AWG/mm²

26-12

26-12

0.20-2.50

Rated surge voltage, kV

1.60

1.60

6

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Flange/threaded insert

Steel

Spring

Stainless steel

Stainless steel

Contact spring

Copper alloy

Copper alloy

Order information

Standard colour(s)

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

31502.1

50

3

31503.1

50

4

31504.1

50

5

31505.1

50

6

31506.1

50

7

31507.1

50

8

31508.1

50

9

31509.1

50

10

31510.1

50

11

31511.1

50

12

31512.1

50

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

31602.1

50

3

31603.1

50

4

31604.1

50

5

31605.1

50

6

31606.1

50

7

31607.1

50

8

31608.1

50

9

31609.1

50

10

31610.1

50

11

31611.1

50

12

31612.1

50

Accessories

Coding system

Cat. no.

Qty.

K1 RD

12002.9

100

Labelling

Refer to page 186.

K1 RD

12002.9

100

Refer to page 186.


Matching counterparts

Refer to matrix on page 86-87



Refer to matrix on page 86-87

* Approvals applied for

PFBZ 4551/.. /7.62-FKD

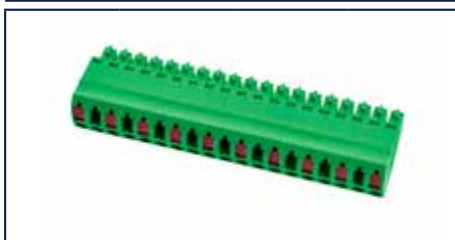

Diagrams

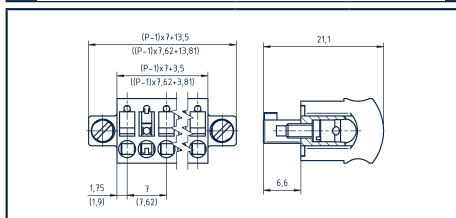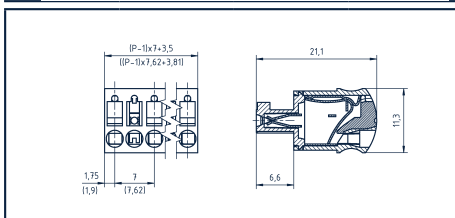[illegible]

Female socket blocks, tension-spring

Female socket block




5.00 mm

PZB 3950/... /5.00



Diagrams

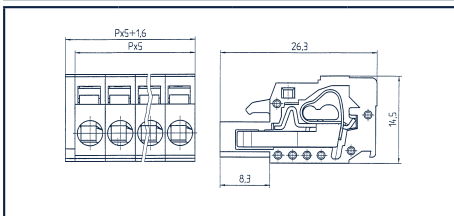

Connection type

Tension spring

Dimensions

Pitch, mm

5.00

Stripping length, mm

8.50

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²

0.08-2.50

Finely stranded (flexible) mm²

0.08-2.50

Finely stranded (with wire-end ferrule) mm²

0.14-1.50

Ratings

User group

	cULus			VDE
	B	C	D	
Rated voltage (V)	300		300	250
Rated current (A)	15		10	12
Overvoltage category				III
Max. cross-section, AWG/mm ²	28-12		28-12	0.5-2.50
Rated surge voltage, kV	1.60		1.60	4
Contamination degree				3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Cage tension spring

Stainless steel

Contact spring

Copper alloy

Order information

	No. of poles	Cat. no.	Qty.
Standard colour(s)		● (RAL 6018)	
Other colours on request.	2	11412.1	50
	3	11413.1	50
	4	11414.1	50
	5	11415.1	50
	6	11416.1	50
	7	11417.1	50
	8	11418.1	50
	9	11419.1	50
	10	11420.1	50
	11	11421.1	50
	12	11422.1	50
	13	11423.1	50
	14	11424.1	50
	15	11425.1	50
	16	11426.1	50
	17	11427.1	50
	18	11428.1	50
	19	11429.1	50
	20	11430.1	50
	21	11431.1	50
	22	11432.1	50
	23	11433.1	50
	24	11434.1	50

Accessories

Coding system

Cat. no.

Qty.

K1 RD

12002.9

100

Labelling

Refer to page 186.

Matching counterparts

Refer to matrix on page 86-87

Notes

A large rectangular area filled with a uniform grid of small, light gray dotted lines, intended for handwritten notes.

Matrix of PCB connector combinations

Male pin block																						
Female socket block	Connection type		Article short name																			
		Pitch	STL 1550 V-G	STL 1550 H-G	STL 1550 V-F	STL 1550 H-F	STL 1590 G	STL 1570 V-G	STL 1570 H-G	STL 950 V	STL 950 H	STL(Z) 950 V-HC	STL(Z) 950 H-HC	STL 950 V-G	STL 950 H-G	STL(Z) 950 V-G-HC	STL(Z) 950 H-G-HC	STL 950 V-F	STL 950 H-F	STL(Z) 950 V-F-HC	STL(Z) 950 H-F-HC	
			3.50 mm	3.50 mm	3.50 mm	3.50 mm				5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm	5.00 mm
			3.81 mm	3.81 mm	3.81 mm	3.81 mm	3.81 mm	3.81 mm	3.81 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm
	Flange option	Catalogue page																				
			134 139	134 139	135 140	135 140	141 141	142 142	142 142	143 151	143 151	144 152	144 152	145 153	145 153	146 154	146 154	147 155	147 155	148 156	148 156	
		PKB 1550	3.50 mm																			
		PKB 1550 F	3.81 mm	●																		
		PKB(Z) 1551	3.50 mm	●	●			●	●	●												
		PKB(Z) 1551 F	3.81 mm	●				●	●													
		PKB(Z) 1552	3.50 mm	●	●			●	●	●												
		PKB(Z) 1552 F	3.81 mm	●				●	●													
		PKB 950	5.00 mm							●	●			●	●							
		PKB 950 F	5.08 mm	●														●	●			
		PKB(Z) 950 HC	5.00 mm									●	●				●	●				
		PKB(Z) 950 F-HC	5.08 mm	●																●	●	
		PKB 955	5.00 mm							●	●			●	●							
		PKB 955 F	5.08 mm																			
		PKB 1100	5.00 mm							●	●			●	●							
		PKB 1110	5.08 mm							●	●			●	●							
		PKBZ 1100 F	5.08 mm	●														●	●			
		PKBZ 1110 F	5.08 mm	●														●	●			
		PKBZ 1520	5.08 mm																			
		PKB 960	7.62 mm																			
		PKBZ 965 F	7.62 mm	●																		
		PBT 1200	5.00 mm							●	●			●	●							
		PBT 1200 F	5.08 mm	●														●	●			
		PKB 1350	3.50 mm																			
		PKB 130 BL	5.00 mm																			
		PKB 130 BL	5.08 mm																			
		PKB 130	10.00 mm																			
		PKB 130 BL	10.16 mm																			
		ISTLZ 950 V	5.08 mm							●	●			●	●							
		ISTLZ 950 H	5.08 mm							●	●			●	●							



Clamping-yoke principle



Wire-protected principle



Eccentric-top principle



STL 975 V-G	STL 975 H-G	STL 990 G	STL 970 V	STL 970 H	STL 970 V-G	STL 970 H-G	STL 970 V-F	STL 970 H-F	STLZ 1520 V-G	STLZ 1520 H-G	STL 960 V	STL 960 H	STL 960 V-G	STL 960 H-G	STLZ 965 V-F	STLZ 965 H-F	STL 1350 V	STL 1350 H	STL 130 V	STL 132 V	STL 140 H	STL 130 V	IPKBZ 950	PK-TS	PK-TS F
5.00 mm	5.00 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	5.08 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	7.62 mm	3.50 mm	3.50 mm	5.00 mm 5.08 mm	5.00 mm	5.00 mm 5.08 mm	5.00 mm 10.00 mm	5.08 mm	5.08 mm	5.08 mm
							●	●							●	●									●


The scatter plot displays the following data points (x, y):

x	y
149	131
149	130
149	129
149	128
149	127
149	126
149	125
149	124
149	123
149	122
149	121
149	120
149	119
149	118
149	117
149	116
149	115
149	114
149	113
149	112
149	111
149	110
149	109
149	108
149	107
149	106
149	105
149	104
149	103
149	102
149	101
149	100
149	99
149	98
149	97
149	96
149	95
149	94
149	93
149	92
149	91
149	90
149	89
149	88
149	87
149	86
149	85
149	84
149	83
149	82
149	81
149	80
149	79
149	78
149	77
149	76
149	75
149	74
149	73
149	72
149	71
149	70
149	69
149	68
149	67
149	66
149	65
149	64
149	63
149	62
149	61
149	60
149	59
149	58
149	57
149	56
149	55
149	54
149	53
149	52
149	51
149	50
149	49
149	48
149	47
149	46
149	45
149	44
149	43
149	42
149	41
149	40
149	39
149	38
149	37
149	36
149	35
149	34
149	33
149	32
149	31
149	30
149	29
149	28
149	27
149	26
149	25
149	24
149	23
149	22
149	21
149	20
149	19
149	18
149	17
149	16
149	15
149	14
149	13
149	12
149	11
149	10
149	9
149	8
149	7
149	6
149	5
149	4
149	3
149	2
149	1
149	0
149	-1
149	-2
149	-3
149	-4
149	-5
149	-6
149	-7
149	-8
149	-9
149	-10
149	-11
149	-12
149	-13
149	-14
149	-15
149	-16
149	-17
149	-18
149	-19
149	-20
149	-21
149	-22
149	-23
149	-24
149	-25
149	-26
149	-27
149	-28
149	-29
149	-30
149	-31
149	-32
149	-33
149	-34
149	-35
149	-36
149	-37
149	-38
149	-39
149	-40
149	-41
149	-42
149	-43
149	-44
149	-45
149	-46
149	-47
149	-48
149	-49
149	-50
149	-51
149	-52
149	-53
149	-54
149	-55
149	-56
149	-57
149	-58
149	-59
149	-60
149	-61
149	-62
149	-63
149	-64
149	-65


Female socket block



PKB 1551/.../3.50

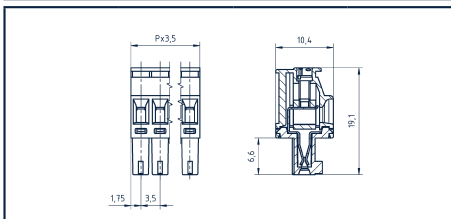

PKB 1551/... /3.50-F

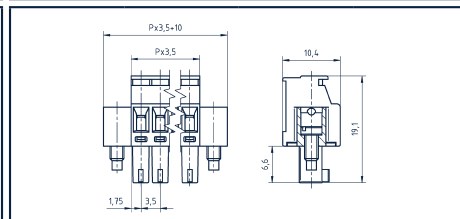

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Flange/threaded insert

Contact spring

Order information

Standard colour(s)

Other colours on request.

Clamping yoke

3.50

7.00

0.14-1.50

0.14-1.50

0.25-1.00

cULus*

VDE*

B

C

D

300

300

160

8

8

8

III

28-12

28-12

0.50-1.50

1.60

1.60

2.50

0.25 / M2

0.25 / M2

0.25 / M2

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Bronze

Bronze

Clamping yoke

3.50

7.00

0.14-1.50

0.14-1.50

0.25-1.00

cULus*

VDE*

B

C

D

300

300

160

8

8

8

III

28-12

28-12

0.50-1.50

1.60

1.60

2.50

0.25 / M2

0.25 / M2

0.25 / M2

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Bronze

Steel

Bronze

No. of poles

Cat. no.

Qty.

● (RAL 6018)

30022.1

50

30023.1

50

30024.1

50

30025.1

50

30026.1

50

30027.1

50

30028.1

50

30029.1

50

30030.1

50

30031.1

50

30032.1

50

30033.1

50

30034.1

50

30035.1

50

30036.1

50

30037.1

50

30038.1

50

30039.1

50

30040.1

50

Accessories

Labelling

Matching counterparts




Refer to page 186.

Refer to matrix on page 100-101

Refer to page 186.

Refer to matrix on page 100-101

Female socket blocks, clamping yoke

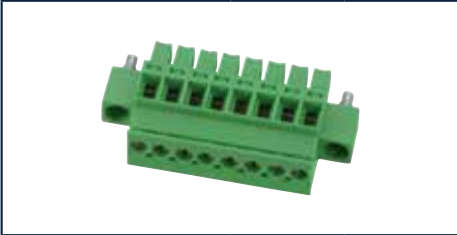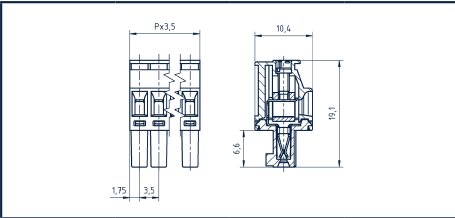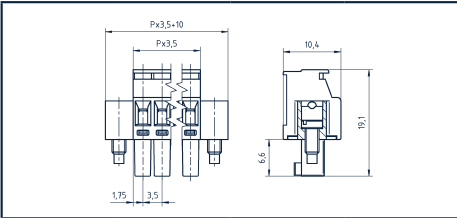Female socket block		PKB 1552/.../3.50	PKB 1552/... /3.50-F
 			
Diagrams			
Connection type		Clamping yoke	Clamping yoke
Dimensions			
Pitch, mm		3.50	3.50
Stripping length, mm		7.00	7.00
Drill hole diameter, mm			
Cross-section			
Solid (rigid) mm ²		0.14-1.50	0.14-1.50
Finely stranded (flexible) mm ²		0.14-1.50	0.14-1.50
Finely stranded (with wire-end ferrule) mm ²		0.25-1.00	0.25-1.00
Ratings			
User group		cULus*	cULus*
Rated voltage (V)		B 300	B 300
Rated current (A)		C 8	C 8
Overvoltage category		D III	D III
Max. cross-section, AWG/mm ²		28-12	28-12
Rated surge voltage, kV		1.60	1.60
Torque, Nm / Screw size		0.25 / M2	0.25 / M2
Contamination degree		3	3
Material			
Insulation material / Flammability class		PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range		-40 °C / +105 °C	-40 °C / +105 °C
Clamping element		Brass	Brass
Screw		Bronze	Bronze
Flange/threaded insert			
Contact spring		Bronze	Steel
Order information			
Standard colour(s)		No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
Other colours on request.		● (RAL 6018)	● (RAL 6018)
		2 30062.1 50	2 30082.1 50
		3 30063.1 50	3 30083.1 50
		4 30064.1 50	4 30084.1 50
		5 30065.1 50	5 30085.1 50
		6 30066.1 50	6 30086.1 50
		7 30067.1 50	7 30087.1 50
		8 30068.1 50	8 30088.1 50
		9 30069.1 50	9 30089.1 50
		10 30070.1 50	10 30090.1 50
		11 30071.1 50	11 30091.1 50
		12 30072.1 50	12 30092.1 50
		13 30073.1 50	13 30093.1 50
		14 30074.1 50	14 30094.1 50
		15 30075.1 50	15 30095.1 50
		16 30076.1 50	16 30096.1 50
		17 30077.1 50	17 30097.1 50
		18 30078.1 50	18 30098.1 50
		19 30079.1 50	19 30099.1 50
		20 30080.1 50	20 30100.1 50
Accessories			
Labelling		Refer to page 186.	Refer to page 186.
Matching counterparts		Refer to matrix on page 100-101	Refer to matrix on page 100-101


* Approvals applied for

Female socket block




3.81 mm

PKB 1550/.../3.81

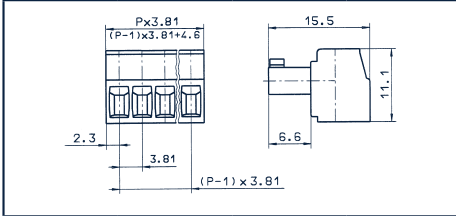

PKB 1550/... /3.81-F

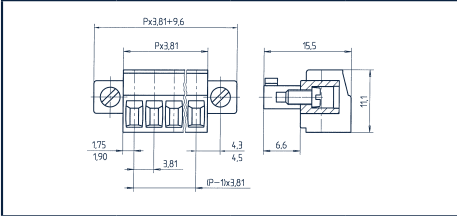

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²

Finely stranded (flexible) mm²

Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Flange/threaded insert

Contact spring

Order information

Standard colour(s)

Other colours on request.

Clamping yoke

3.81

7.00

0.14-1.50

0.14-1.50

0.25-1.00

cULus



B

C

D

300

8

300

8

160

8

III

28-12

28-12

0.50-1.50

1.60

1.60

2.50

0.25 / M2

0.25 / M2

0.25 / M2

3

Clamping yoke

3.81

7.00

0.14-1.50

0.14-1.50

0.25-1.00

cULus



B

C

D

300

8

300

8

160

8

III

28-12

28-12

0.50-1.50

1.60

1.60

2.50

0.25 / M2

0.25 / M2

0.25 / M2

3

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Accessories

Labelling

Matching counterparts


Refer to page 186.

Refer to matrix on page 100-101

Refer to page 186.


Refer to matrix on page 100-101

Female socket block




3.81 mm

PKBZ 1552/.../3.81

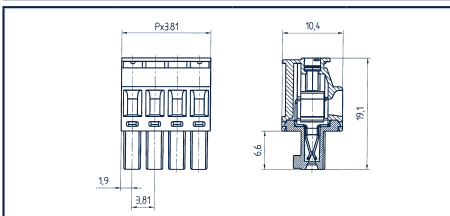

PKBZ 1552/.../3.81-F

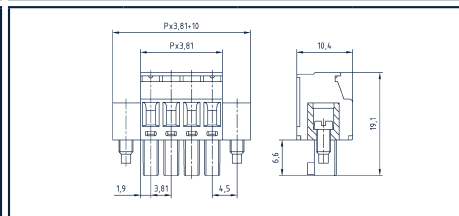

Diagrams

Connection type

Clamping yoke

Clamping yoke

Dimensions

Pitch, mm

3.81

3.81

Stripping length, mm

7.00

7.00

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²

0.14-1.50

0.14-1.50

Finely stranded (flexible) mm²

0.14-1.50

0.14-1.50

Finely stranded (with wire-end ferrule) mm²

0.25-1.00

0.25-1.00

Ratings

User group

cULus			
B	C	D	
300		300	160
8		8	8
			III
28-16		28-16	0.50-1.50
1.60		1.60	2.50
0.25 / M2		0.25 / M2	0.25 / M2
			3

cULus			
B	C	D	
300		300	160
8		8	8
			III
28-16		28-16	0.50-1.50
1.60		1.60	2.50
0.25 / M2		0.25 / M2	0.25 / M2
			3

Contamination degree

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

-40 °C / +105 °C

Clamping element

Brass

Brass

Screw

Bronze

Bronze

Flange/threaded insert

Contact spring

Bronze

Steel

Bronze

Order information

Standard colour(s)

Other colours on request.

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	13062.1	50
3	13063.1	50
4	13064.1	50
5	13065.1	50
6	13066.1	50
7	13067.1	50
8	13068.1	50
9	13069.1	50
10	13070.1	50
11	13071.1	50
12	13072.1	50
13	13073.1	50
14	13074.1	50
15	13075.1	50
16	13076.1	50
17	13077.1	50
18	13078.1	50
19	13079.1	50
20	13080.1	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	14079.1	50
3	14080.1	50
4	14081.1	50
5	14082.1	50
6	14083.1	50
7	14084.1	50
8	14085.1	50
9	14086.1	50
10	14087.1	50
11	14088.1	50
12	14089.1	50
13	14090.1	50
14	14091.1	50
15	14092.1	50
16	14093.1	50
17	14094.1	50
18	14095.1	50
19	14096.1	50
20	14097.1	50

Accessories

Labelling

Refer to page 186.

Refer to page 186.

Matching counterparts

Refer to matrix on page 100-101



Refer to matrix on page 100-101

Female socket block





5.00 mm

PKB 950/.../5.00-HC

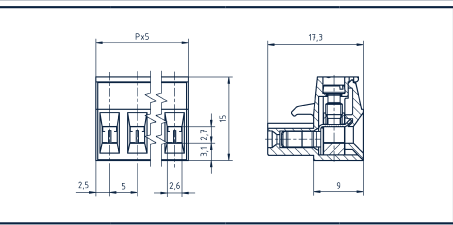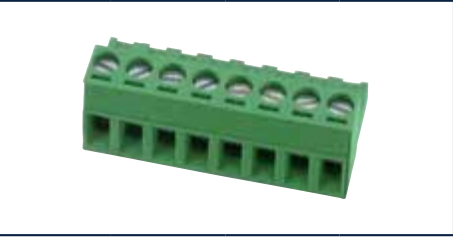

PKB 950/.../5.00-F-HC

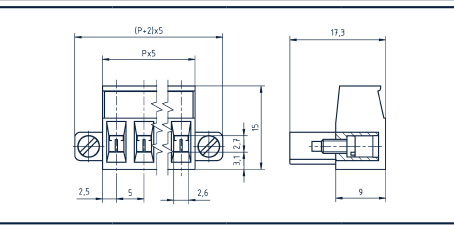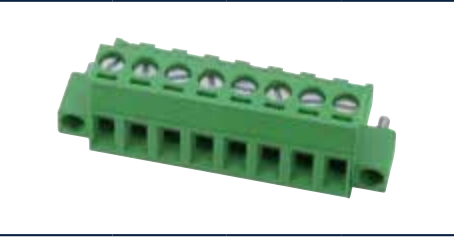

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²

Finely stranded (flexible) mm²

Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Flange/threaded insert

Contact spring

Order information

Standard colour(s)

Other colours on request.

Clamping yoke

5.00

6.00

0.20-4.00

0.20-2.50

0.25-2.50

cULus*



B

C

D

300

150

300

250

16

16

10

16

16

III

III

22-12

22-12

22-12

0.50-2.50

1.60

1.30

1.60

4.00

0.5 / M3

0.5 / M3

0.5 / M3

0.5 / M3

0.5 / M3

0.5 / M3

0.5 / M3

3

3

Copper alloy

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

30122.1

50

3

30123.1

50

4

30124.1

50

5

30125.1

50

6

30126.1

50

7

30127.1

50

8

30128.1

50

9

30129.1

50

10

30130.1

50

11

30131.1

50

12

30132.1

50

Accessories

Coding system

Cat. no.

Qty.

Labelling

Matching counterparts

K1 RD

12002.9

K1 RD

12002.9

Refer to page 186.

Refer to page 186.

Refer to matrix on page 100-101

Refer to matrix on page 100-101


* Approvals applied for

Female socket blocks, clamping yoke


Female socket block



PKB 955/.../5.00

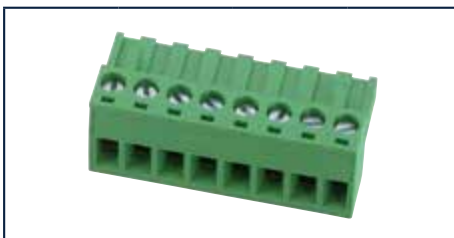

Diagrams

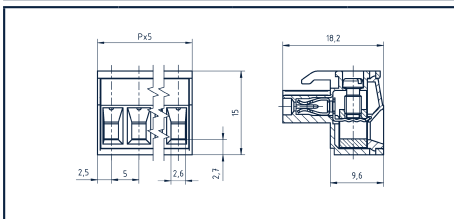


Connection type	Clamping yoke			
Dimensions				
Pitch, mm	5.00			
Stripping length, mm	7.00			
Drill hole diameter, mm				
Cross-section				
Solid (rigid) mm²	0.20-4.00			
Finely stranded (flexible) mm²	0.20-2.50			
Finely stranded (with wire-end ferrule) mm²	0.25-2.50			
Ratings				
User group	B	C	D	
Rated voltage (V)	300		300	250
Rated current (A)	12		10	9
Overtoltage category				III
Max. cross-section, AWG/mm²	28-12		28-12	0.20-2.50
Rated surge voltage, kV	1.60		1.60	2.00
Torque, Nm / Screw size	0.5 / M3		0.5 / M3	0.5 / M3
Contamination degree				3
Material				
Insulation material / Flammability class	PA 6.6 / UL 94 V-0			
Temperature range	−40 °C / +105 °C			
Clamping element	Brass			
Screw	Bronze			
Flange/threaded insert				
Contact spring	Bronze			
Order information	No. of poles	Cat. no.	Qty.	
Standard colour(s)		● (RAL 6018)		
Other colours on request.	2	30202.1	50	
	3	30203.1	50	
	4	30204.1	50	
	5	30205.1	50	
	6	30206.1	50	
	7	30207.1	50	
	8	30208.1	50	
	9	30209.1	50	
	10	30210.1	50	
	11	30211.1	50	
	12	30212.1	50	
	13	30213.1	50	
	14	30214.1	50	
	15	30215.1	50	
	16	30216.1	50	
	17	30217.1	50	
	18	30218.1	50	
	19	30219.1	50	
	20	30220.1	50	
	21	30221.1	50	
	22	30222.1	50	
	23	30223.1	50	
	24	30224.1	50	
Accessories				
Coding system	K1 RD			
Cat. no.	12002.9	100		
Labelling	Refer to page 186.			
Matching counterparts				
	Refer to matrix on page 100-101			

Female socket block




5.00 mm

PKB 1100/.../5.00

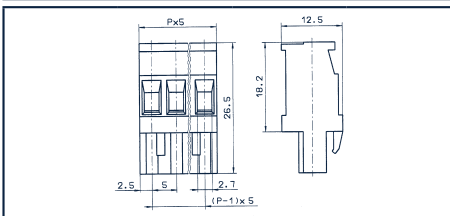

PKB 1110/.../5.00

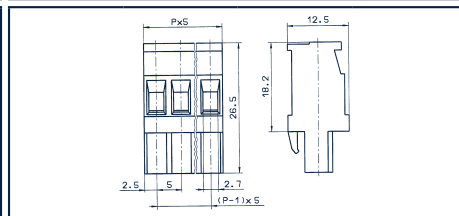

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Contact spring

Order information

Standard colour(s)

Other colours on request.

Clamping yoke

5.00

7.00

Clamping yoke

5.00

7.00

cULus				VDE
B	C	D		
300	150	300	250	
15	15	10	10	
				III
22-10	22-10	22-10	0.50-2.50	
1.60	1.30	1.60	4.00	
0.5 / M3	0.5 / M3	0.5 / M3	0.5 / M3	
			3	

cULus				VDE
B	C	D		
300	150	300	250	
15	15	10	10	
				III
22-10	22-10	22-10	0.50-2.50	
1.60	1.30	1.60	4.00	
0.5 / M3	0.5 / M3	0.5 / M3	0.5 / M3	
			3	

PA 6.6 / UL 94 V-0			
-40 °C / +105 °C			
Brass			
Steel			
Bronze			

PA 6.6 / UL 94 V-0			
-40 °C / +105 °C			
Brass			
Steel			
Bronze			

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	11286.1	50
3	11287.1	50
4	11288.1	50
5	11289.1	50
6	11290.1	50
7	11291.1	50
8	11292.1	50
9	11293.1	50
10	11294.1	50
11	11295.1	50
12	11296.1	50
13	11297.1	50
14	11298.1	50
15	11299.1	50
16	11300.1	50
17	11301.1	50
18	11302.1	50
19	11303.1	50
20	11304.1	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	11320.1	50
3	11321.1	50
4	11322.1	50
5	11323.1	50
6	11324.1	50
7	11325.1	50
8	11326.1	50
9	11327.1	50
10	11328.1	50
11	11329.1	50
12	11330.1	50
13	11331.1	50
14	11332.1	50
15	11333.1	50
16	11334.1	50
17	11335.1	50
18	11336.1	50
19	11337.1	50
20	11338.1	50

Accessories

Coding system

Cat. no.

Qty.

Labelling

Matching counterparts

K1 RD

12002.9

100

Refer to page 186.

Refer to matrix on page 100-101

K1 RD

12002.9

100



Refer to page 186.

Refer to matrix on page 100-101

PKB 950/... /5.08-F



Diagrams

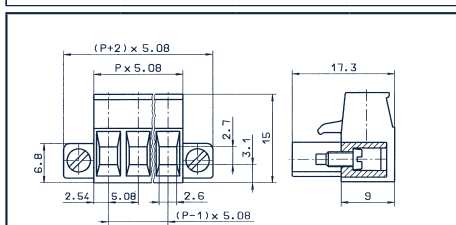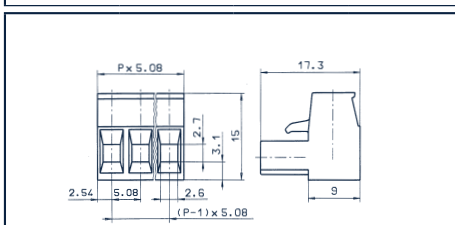



Connection type		Clamping yoke				Clamping yoke			
Dimensions									
Pitch, mm		5.08				5.08			
Stripping length, mm		6.00				6.00			
Drill hole diameter, mm									
Cross-section									
Solid (rigid) mm²		0.20-4.00				0.20-4.00			
Finely stranded (flexible) mm²		0.20-2.50				0.20-2.50			
Finely stranded (with wire-end ferrule) mm²		0.25-2.50				0.25-2.50			
Ratings									
User group		cULus				cULus			
Rated voltage (V)		B	C	D		B	C	D	
Rated current (A)		300	150	300	250	300	150	300	250
Overvoltage category		15	15	10	12	15	15	10	12
Max. cross-section, AWG/mm²		III				III			
Rated surge voltage, kV		22-12	22-12	22-12	0.50-2.50	22-12	22-12	22-12	0.50-2.50
Torque, Nm / Screw size		1.60	1.30	1.60	4.00	1.60	1.30	1.60	4.00
Contamination degree		0.5 / M3	0.5 / M3	0.5 / M3	0.5 / M3	0.5 / M3	0.5 / M3	0.5 / M3	0.5 / M3
Material		3				3			
Insulation material / Flammability class		PA 6.6 / UL 94 V-0				PA 6.6 / UL 94 V-0			
Temperature range		-40 °C / +105 °C				-40 °C / +105 °C			
Clamping element		Brass				Brass			
Screw		Steel				Steel			
Flange/threaded insert		Steel				Steel			
Contact spring		Bronze				Bronze			
Order information		No. of poles	Cat. no.	Qty.		No. of poles	Cat. no.	Qty.	
Standard colour(s)			● (RAL 6018)				● (RAL 6018)		
Other colours on request.		2	11230.1	50		2	11277.1	50	
		3	11231.1	50		3	11278.1	50	
		4	11232.1	50		4	11279.1	50	
		5	11233.1	50		5	11280.1	50	
		6	11234.1	50		6	11281.1	50	
		7	11235.1	50		7	11282.1	50	
		8	11236.1	50		8	11283.1	50	
		9	11237.1	50		9	11284.1	50	
		10	11238.1	50		10	11285.1	50	
		11	11239.1	50		11	13212.1	50	
		12	11240.1	50		12	13213.1	50	
		13	11241.1	50		13	13214.1	50	
		14	11242.1	50		14	13215.1	50	
		15	11243.1	50		15	13216.1	50	
		16	11244.1	50		16	13217.1	50	
		17	11245.1	50		17	13218.1	50	
		18	11246.1	50		18	13219.1	50	
		19	11247.1	50		19	13220.1	50	
		20	11248.1	50		20	13221.1	50	
		21	11249.1	50		21	13222.1	50	
		22	11250.1	50		22	13223.1	50	
		23	11251.1	50		23	13707.1	50	
		24	11252.1	50		24	13708.1	50	
Accessories									
Coding system		K1 RD				K1 RD			
Cat. no.		12002.9				12002.9			
Labelling		Refer to page 186.				Refer to page 186.			
Matching counterparts		Refer to matrix on page 100-101				Refer to matrix on page 100-101			

Female socket block





5.08 mm

PKBZ 950/.../5.08-HC

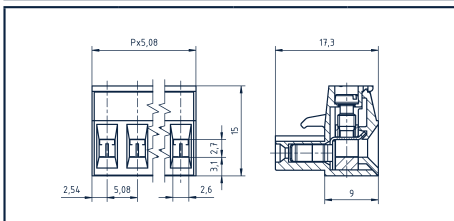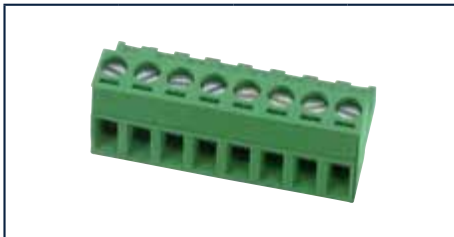

PKBZ 950/.../5.08-F-HC

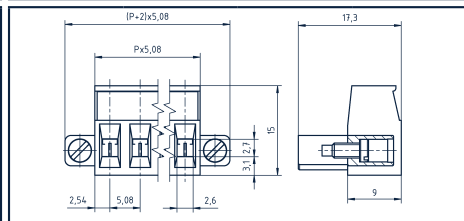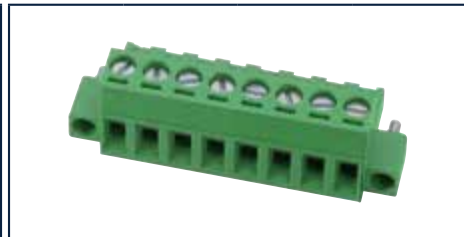

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Flange/threaded insert

Contact spring

Order information

Standard colour(s)

Other colours on request.

Clamping yoke

5.08

6.00

0.20-4.00

0.20-2.50

0.25-2.50

cULus*



B

C

D

300

150

300

250

16

16

10

III

22-10

22-10

22-10

0.50-2.50

1.60

1.30

1.60

4.00

0.8 / M3

0.8 / M3

0.8 / M3

0.8 / M3

3

Copper alloy

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

30142.1

50

3

30143.1

50

4

30144.1

50

5

30145.1

50

6

30146.1

50

7

30147.1

50

8

30148.1

50

9

30149.1

50

10

30150.1

50

11

30151.1

50

12

30152.1

50

Clamping yoke

5.08

6.00

0.20-4.00

0.20-2.50

0.25-2.50

cULus*



B

C

D

300

150

300

16

16

10

III

22-12

22-12

22-12

0.50-2.50

1.60

1.30

1.60

4.00

0.8 / M3

0.8 / M3

0.8 / M3

0.5 / M3

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Steel

Copper alloy

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

30182.1

50

3

30183.1

50

4

30184.1

50

5

30185.1

50

6

30186.1

50

7

30187.1

50

8

30188.1

50

9

30189.1

50

10

30190.1

50

11

30191.1

50

12

30192.1

50

Accessories

Coding system

Cat. no.

Qty.

Labelling

Matching counterparts

K1 RD

12002.9

100

Refer to page 186.

Refer to matrix on page 100-101

K1 RD

12002.9

100

Refer to page 186.

Refer to matrix on page 100-101

* Approvals applied for



Female socket blocks, clamping yoke

Female socket block




5.08 mm

PKBZ 955/.../5.08

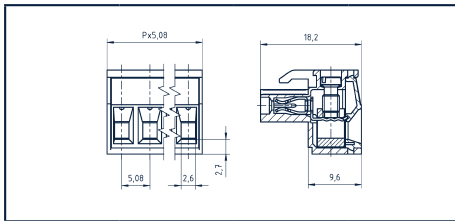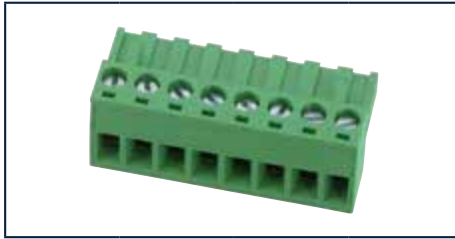

IPKBZ 950/.../5.08

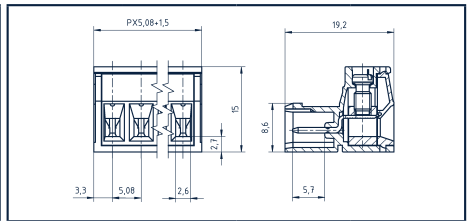

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Flange/threaded insert

Contact spring

Order information

Standard colour(s)

Other colours on request.

Accessories

Coding system

Cat. no.

Qty.

Labelling

Matching counterparts

Clamping yoke

5.08

7.00

cULus



B

C

D

300

12

10

250

9

III

28-10

28-10

0.20-2.50

1.60

1.60

2.00

0.5 / M3

0.5 / M3

0.5 / M3

3

Bronze

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

30232.1

50

3

30233.1

50

4

30234.1

50

5

30235.1

50

6

30236.1

50

7

30237.1

50

8

30238.1

50

9

30239.1

50

10

30240.1

50

11

30241.1

50

12

30242.1

50

13

30243.1

50

14

30244.1

50

15

30245.1

50

16

30246.1

50

17

30247.1

50

18

30248.1

50

19

30249.1

50

20

30250.1

50

21

30251.1

50

22

30252.1

50

23

30253.1

50

24

30254.1

50

Clamping yoke

5.08

7.00

cULus



B

C

D

300

15

300

10

250

16

III

28-10

28-10

0.20-2.50

1.60

1.60

4.00

0.5 / M3

0.5 / M3

0.5 / M3

3

Brass

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

14196.1

50

3

14197.1

50

4

14198.1

50

5

14199.1

50

6

14200.1

50

7

14201.1

50

8

14202.1

50

9

14203.1

50

10

14204.1

50

11

14205.1

50

12

14206.1

50

13

14207.1

50

14

14208.1

50

15

14209.1

50

16

14210.1

50

17

14211.1

50

18

14212.1

50

19

14213.1

50

20

14214.1

50

21

14215.1

50

22

14216.1

50

23

14217.1

50

24

14218.1

50

K5 RD

14310.4

100

Refer to page 186.


Refer to matrix on page 100-101

Female socket block




5.08 mm

PKB 1100/.../5.08

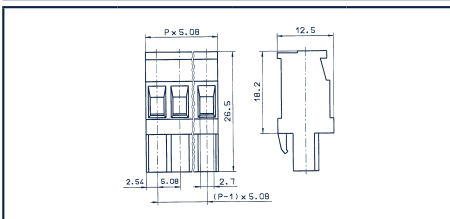

PKBZ 1100/.../5.08-F

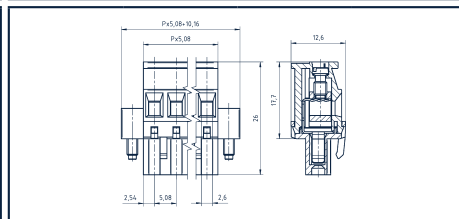

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Flange/threaded insert

Contact spring

Order information

Standard colour(s)

Other colours on request.

Clamping yoke

5.08

7.00

0.20-4.00

0.20-2.50

0.25-2.50

cULus

B	C	D	
300	150	300	250
15	15	10	10
			III
22-10	22-10	22-10	0.50-2.50
1.60	1.30	1.60	4.00
0.5 / M3	0.5 / M3	0.5 / M3	0.5 / M3
			3

cULus

B	C	D	
300		300	250
15		10	10
			III
28-12		28-12	0.50-2.50
1.60		1.60	4.00
0.5 / M3		0.5 / M3	0.5 / M3
			3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Steel

Bronze

Bronze

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Steel

Bronze

Bronze

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	11305.1	50
3	11306.1	50
4	11307.1	50
5	11308.1	50
6	11309.1	50
7	11310.1	50
8	11311.1	50
9	11312.1	50
10	11313.1	50
11	11314.1	50
12	11315.1	50
13	11316.1	50
14	11317.1	50
15	11318.1	50
16	11319.1	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	14219.1	50
3	14220.1	50
4	14221.1	50
5	14222.1	50
6	14223.1	50
7	14224.1	50
8	14225.1	50
9	14226.1	50
10	14227.1	50
11	14228.1	50
12	14229.1	50
13	14230.1	50
14	14231.1	50
15	14232.1	50
16	14233.1	50
17	14234.1	50
18	14235.1	50
19	14236.1	50
20	14237.1	50
21	14238.1	50
22	14239.1	50
23	14240.1	50
24	14241.1	50

Accessories

Coding system

Cat. no.

Qty.

Labelling

Matching counterparts

K1 RD

12002.9

100

Refer to page 186.

Refer to matrix on page 100-101

K4 RD

14309.4

100



Refer to page 186.

Refer to matrix on page 100-101

PKBZ 1110/.../5.08-F



Diagrams

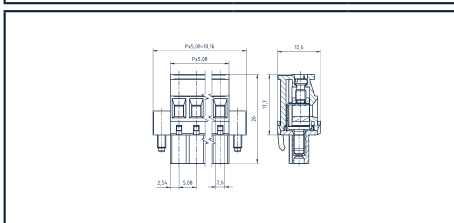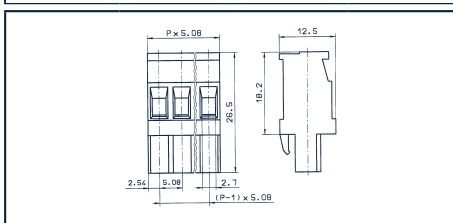

Female socket block


PKBZ 1520/.../5.08



5.08 mm



Diagrams

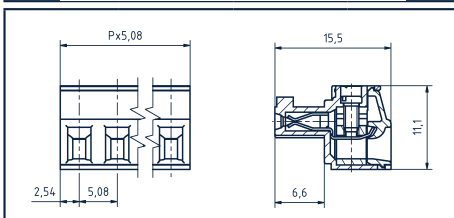

Connection type

Clamping yoke

Dimensions

Pitch, mm

5.08

Stripping length, mm

7.00

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²

0.14-1.50

Finely stranded (flexible) mm²

0.14-1.50

Finely stranded (with wire-end ferrule) mm²

0.25-0.50

Ratings

User group

	cULus*		VDE*
	B	C	D
Rated voltage (V)	300		300
Rated current (A)	8		8
Overvoltage category			III
Max. cross-section, AWG/mm ²	28-16		28-16
Rated surge voltage, kV	1.60		1.60
Torque, Nm / Screw size	0.25 / M2		0.25 / M2
Contamination degree			3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Clamping element

Brass

Screw

Bronze

Flange/threaded insert

Contact spring

Bronze

Order information

Standard colour(s)

● (RAL 6018)

Other colours on request.

No. of poles	Cat. no.	Qty.
2	31872.1	200
3	31873.1	200
4	31874.1	100
5	31875.1	100
6	31876.1	50
7	31877.1	50
8	31878.1	50
9	31879.1	50
10	31880.1	50
11	31881.1	50
12	31882.1	50

Accessories

Labelling

Refer to page 186.

Matching counterparts



Refer to matrix on page 100-101

* Approvals applied for

PKBZ 965/.../7.62-F





Diagrams

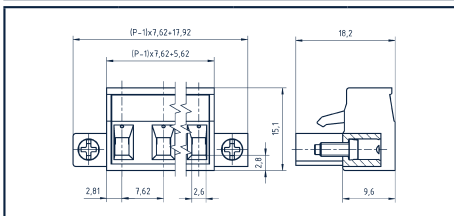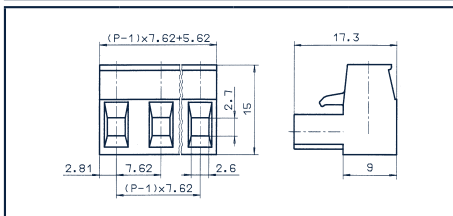[illegible]

Notes

A large rectangular area filled with a uniform grid of small, light gray dotted lines, intended for handwritten notes.

Female socket blocks, eccentric

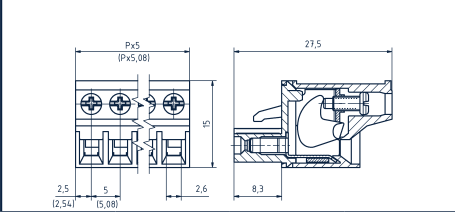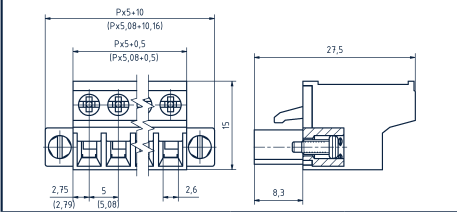
Connection terminals		PBT 1200/.../5.00	PBT 1200/.../5.00-F
 5.00 mm			
Diagrams			
Connection type		Eccentric	Eccentric
Dimensions			
Pitch, mm		5.00	5.00
Stripping length, mm		10.00	10.00
Drill hole diameter, mm			
Cross-section			
Solid (rigid) mm ²		0.20-4.00	0.20-4.00
Finely stranded (flexible) mm ²		0.20-2.50	0.20-2.50
Finely stranded (with wire-end ferrule) mm ²		0.25-2.50	0.25-2.50
Ratings			
User group			
Rated voltage (V)			
Rated current (A)			
Overvoltage category			
Max. cross-section, AWG/mm ²			
Rated surge voltage, kV			
Torque, Nm / Screw size			
Contamination degree			
Material			
Insulation material / Flammability class		PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range		-40 °C / +105 °C	-40 °C / +105 °C
Clamping cage / cam		Steel / Steel	Steel / Steel
Screw		Steel	Steel
Contact spring		Bronze	Bronze
Order information			
Standard colour(s)		● (RAL 6018)	● (RAL 6018)
Other colours on request.			
	No. of poles	Cat. no.	Qty.
	2	31422.1	50
	3	31423.1	50
	4	31424.1	50
	5	31425.1	50
	6	31426.1	50
	7	31427.1	50
	8	31428.1	50
	9	31429.1	50
	10	31430.1	50
	11	31431.1	50
	12	31432.1	50
	13	31433.1	50
	14	31434.1	50
	15	31435.1	50
	16	31436.1	50
	17	31437.1	50
	18	31438.1	50
	19	31439.1	50
	20	31440.1	50
	21	31441.1	50
	22	31442.1	50
	23	31443.1	50
	24	31444.1	50
Accessories			
Coding system			
Cat. no.	Qty.	K4 RD 14309.4	100
Labelling		Refer to page 186.	Refer to page 186.
Matching counterparts		Refer to matrix on page 100-101	Refer to matrix on page 100-101

* Approvals applied for


Female socket block



PBT 1200/.../5.08

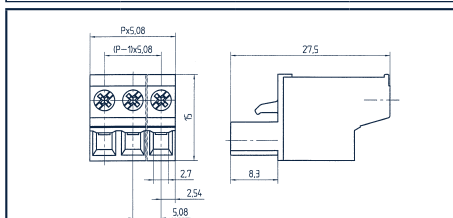

PBT 1200/... /5.08-F

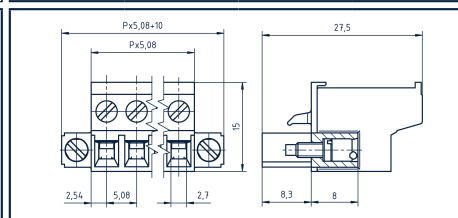

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping cage / cam

Screw

Contact spring

Order information

Standard colour(s)

Other colours on request.

Eccentric

5.08

10.00

0.20-4.00

0.20-2.50

0.20-2.50

cULus

B	C	D	
300	150	300	250
15	15	10	12
			III
22-12	22-12	22-12	0.50-2.50
1.60	1.30	1.60	4.00
0.5 / M2.5	0.5 / M2.5	0.5 / M2.5	0.5 / M2.5
			3

Eccentric

5.08

10.00

0.08-4.00

0.08-2.50

0.25-2.50

cULus*

B	C	D	
300	150	300	250
15	15	10	12
			III
22-12	22-12	22-12	0.50-2.50
1.60	1.30	1.60	4.00
0.5 / M2.5	0.5 / M2.5	0.5 / M2.5	0.5 / M2.5
			3

Accessories

Coding system

Cat. no.

Qty.

Labelling

Matching counterparts

K4 RD

14309.4

100

Refer to page 186.

Refer to matrix on page 100-101

K4 RD

14309.4

100

Refer to page 186.


Refer to matrix on page 100-101

Female socket block




5.00 mm

PKB 130/.../5.00

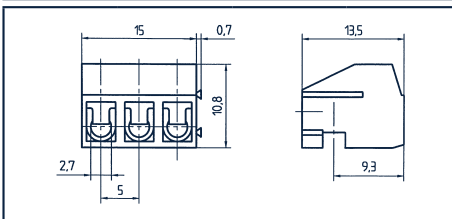

PKB 130/... /5.00-BL

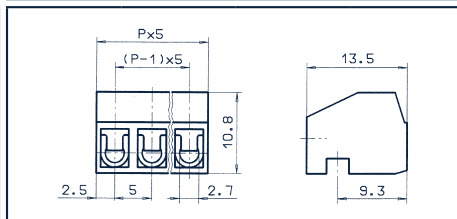

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Wire protection

Contact spring

Order information

Standard colour(s)

Other colours on request.

Wire protection

5.00

6.00

Wire protection

5.00

6.00

0.14-2.50

0.14-1.50

0.14-1.50

cULus



B

C

D

B

C

D

250

300

150

300

300

150

300

250

8

8

8

8

8

8

7

III

III

22-12

22-12

22-12

22-12

22-12

22-12

0.50-2.50

1.60

1.30

1.60

1.60

1.30

1.60

4.00

0.45/M2.6

0.45/M2.6

0.45/M2.6

0.45/M2.6

0.45/M2.6

0.45/M2.6

0.4/M2.6

3

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Copper alloy

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

11169.1

11169.4

50

3

11170.1

11170.4

50

4

11171.1

11171.4

50

5

11172.1

11172.4

50

6

11173.1

11173.4

50

7

11174.1

11174.4

50

8

11175.1

11175.4

50

9

11176.1

11176.4

50

10

11177.1

11177.4

50

11

11178.1

11178.4

50

12

11179.1

11179.4

50

Copper alloy

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

11185.1

11185.4

50

3

11186.1

11186.4

50

4

11187.1

11187.4

50

5

11188.1

11188.4

50

6

11189.1

11189.4

50

7

11190.1

11190.4

50

8

11191.1

11191.4

50

9

11192.1

11192.4

50

10

11193.1

11193.4

50

11

11194.1

11194.4

50

12

11195.1

11195.4

50

13

11196.1

11196.4

50

14

11197.1

11197.4

50

15

11198.1

11198.4

50

16

11199.1

11199.4

50

Matching counterparts

Refer to matrix on page 100-101


Refer to matrix on page 100-101

Female socket block




10.00 mm

PKB 130/.../10.00

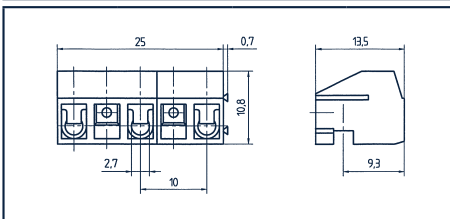

PKB 130/... /10.00-BL

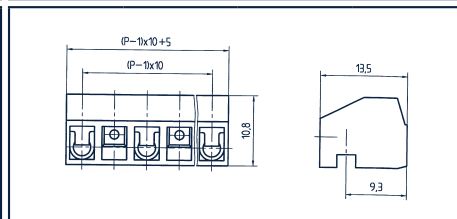

Diagrams

Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²Finely stranded (flexible) mm²Finely stranded (with wire-end ferrule) mm²

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Clamping element

Screw

Contact spring

Order information

Standard colour(s)

Other colours on request.

Wire protection

10.00

6.00

0.14-2.50

0.14-1.50

0.14-1.50

cULus



B

C

D

630

300

150

300

7

8

8

8

III

22-12

22-12

22-12

0.50-2.50

1.60

1.30

1.60

6.00

0.45/M2.6

0.45/M2.6

0.45/M2.6

0.4/M2.6

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Copper alloy

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

11180.1

11180.4

50

3

11181.1

11181.4

50

4

11182.1

11182.4

50

5

11183.1

11183.4

50

6

11184.1

11184.4

50

Push-in

5.00

6.00

0.14-2.50

0.14-1.50

0.14-1.50

cULus



B

C

D

630

300

150

300

7

8

8

8

III

22-12

22-12

22-12

0.50-2.50

1.60

1.30

1.60

6.00

0.45/M2.6

0.45/M2.6

0.45/M2.6

0.4/M2.6

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

Steel

Copper alloy

No. of poles

Cat. no.

Qty.

● (RAL 6018) ● (RAL 7016)

2

11200.1

11200.4

50

3

11201.1

11201.4

50

4

11202.1

11202.4

50

5

11203.1

11203.4

50

6

11204.1

11204.4

50

7

11205.1

11205.4

50

8

11206.1

11206.4

50

Matching counterparts

Refer to matrix on page 100-101

Refer to matrix on page 100-101

Notes



A large rectangular area filled with a uniform grid of small, light-gray dotted lines, intended for handwritten notes.

Male pin blocks

Male pin block

3.50 mm

Diagrams



Connection type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature


Recommended wave soldering time, min / max

Order information


Standard colour(s)

Other colours on request.

STL 1350/.../3.50-V

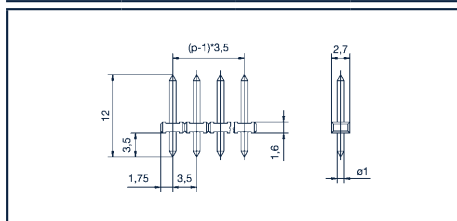

STL 1350/.../3.50-H

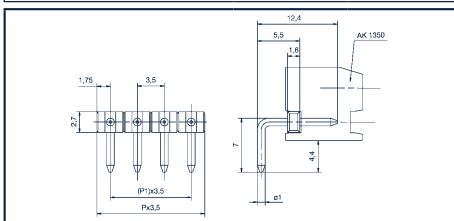

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

3.50

1.30

cULus* VDE*

B C D

150 125

10 10

III

1.30 2.50

2

2

2

2

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

260 °C

3/4 s

3/4 s

No. of poles Cat. no. Qty.

● (RAL 9011)

13911.4 50

13912.4 50

13913.4 50

13914.4 50

13915.4 50

13916.4 50

13917.4 50

13918.4 50

13919.4 50

13920.4 50

13921.4 50

13922.4 50

13923.4 50

13924.4 50

13925.4 50

13926.4 50

13927.4 50

13928.4 50

13929.4 50

13930.4 50

13931.4 50

13932.4 50

13933.4 50

3.50

1.30

cULus* VDE*

B C D

150 125

10 10

III

1.30 2.50

2

2

2

2

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

260 °C

3/4 s

3/4 s

No. of poles Cat. no. Qty.

● (RAL 9011)

13934.4 50

13935.4 50

13936.4 50

13937.4 50

13938.4 50

13939.4 50

13940.4 50

13941.4 50

13942.4 50

13943.4 50

13944.4 50

13945.4 50

13946.4 50

13947.4 50

13948.4 50

13949.4 50

13950.4 50

13951.4 50

13952.4 50

13953.4 50

13954.4 50

13955.4 50

13956.4 50

Matching counterparts

Refer to matrix on page 100-101

Refer to matrix on page 100-101

* Approvals applied for

Male pin block



5.00 mm



STL 130/.../5.00-V



STL 132/.../5.00-V



Diagrams

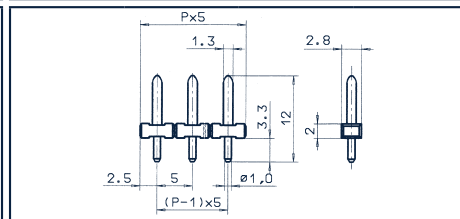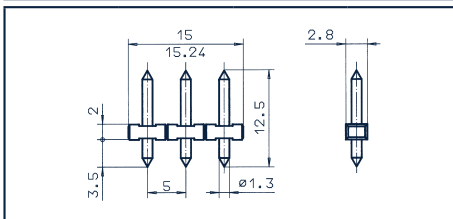

Connection type

Dimensions

Pitch, mm

5.00

Stripping length, mm

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

cULus*			
B	C	D	VDE*
300	150	300	250
10	10	10	7
III			
1.60	1.30	1.60	4.00
3			

PA 6.6 / UL 94 V-0
-40 °C / +105 °C
Brass

260 °C
3/4 s

No. of poles	Cat. no.	Qty.
	● (RAL 9011)	
2	11435.4	50
3	11436.4	50
4	11437.4	50
5	11438.4	50
6	11439.4	50
7	11440.4	50
8	11441.4	50
9	11442.4	50
10	11443.4	50
11	11444.4	50
12	11445.4	50
13	11446.4	50
14	11447.4	50
15	11448.4	50
16	11449.4	50
17	11450.4	50
18	11451.4	50
19	11452.4	50
20	11453.4	50
21	11454.4	50
22	11455.4	50
23	11456.4	50
24	11457.4	50

5.00

1.20

cULus*			
B	C	D	VDE*
300		300	250
10		10	7
III			
1.60		1.60	4.00
3			

PA 6.6 / UL 94 V-0
-40 °C / +105 °C
Brass

260 °C
3/4 s

No. of poles	Cat. no.	Qty.
	● (RAL 9011)	
2	11469.4	50
3	11470.4	50
4	11471.4	50
5	11472.4	50
6	11473.4	50
7	11474.4	50
8	11475.4	50
9	11476.4	50
10	11477.4	50
11	11478.4	50
12	11479.4	50
13	11480.4	50
14	11481.4	50
15	11482.4	50
16	11483.4	50
17	11484.4	50
18	11485.4	50
19	11486.4	50
20	11487.4	50
21	11488.4	50
22	11489.4	50
23	11490.4	50
24	11491.4	50

Matching counterparts

Refer to matrix on page 100-101


Refer to matrix on page 100-101

* Approvals applied for

STL 140/.../5.00-H



Diagrams

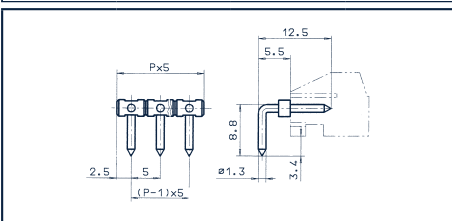

* Approvals applied for

Male pin block



5.08 mm



STL 130/.../5.08-V



STL 140/.../5.08-H



Diagrams

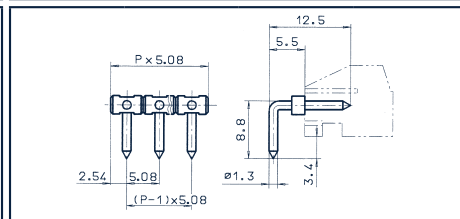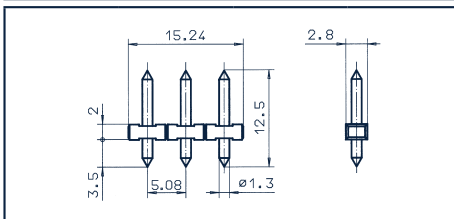

Connection type

Dimensions

Pitch, mm

5.08

Stripping length, mm

Drill hole diameter, mm

1.50

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

cULus*			
B	C	D	VDE*
300	150	300	250
10	10	10	7

III

1.60 1.30 1.60 4.00

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

260 °C

3/4 s

No. of poles Cat. no. Qty.

● (RAL 9011)

2 13650.4 50

3 13651.4 50

4 13652.4 50

5 13653.4 50

6 13654.4 50

7 13655.4 50

8 13656.4 50

9 13657.4 50

10 13658.4 50

11 13659.4 50

12 13660.4 50

13 13661.4 50

14 13662.4 50

15 13663.4 50

16 13664.4 50

17 13665.4 50

18 13666.4 50

19 13667.4 50

20 13668.4 50

21 13669.4 50

22 13670.4 50

23 13671.4 50

24 13672.4 50

5.08

1.50

cULus*			
B	C	D	VDE*
300			250
10		10	10

III

1.60 1.60 4.00

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Brass

260 °C

3/4 s

No. of poles Cat. no. Qty.

● (RAL 9011)

2 13673.4 50

3 13674.4 50

4 13675.4 50

5 13676.4 50

6 13677.4 50

7 13678.4 50

8 13679.4 50

9 13680.4 50

10 13681.4 50

11 13682.4 50

12 13683.4 50

13 13684.4 50

14 13685.4 50

15 13686.4 50

16 13687.4 50

17 13688.4 50

18 13689.4 50

19 13690.4 50

20 13691.4 50

21 13692.4 50

22 13693.4 50

23 13694.4 50

24 13695.4 50

Matching counterparts

Refer to matrix on page 100-101

Refer to matrix on page 100-101

* Approvals applied for

Male pin blocks


Male pin block



STL 130/.../10.00-V



Diagrams

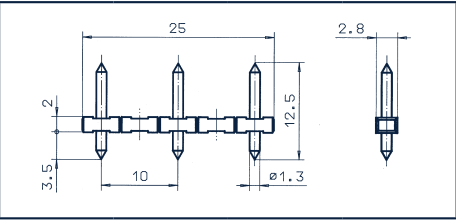

Wire connect type

Dimensions
Pitch, mm
Stripping length, mm
Drill hole diameter, mm

10.00
1.50

Ratings

User group
Rated voltage (V)
Rated current (A)
Overvoltage category
Max. cross-section, AWG/mm²
Rated surge voltage, kV
Torque, Nm / Screw size
Contamination degree

cULus				VDE
B	C	D		
300	150	300		630
10	10	10		7
				III
1.60	1.30	1.60		6.00
				3

Material

Insulation material / Flammability class
Temperature range
Contact pin

PA 6.6 / UL 94 V-0
-40 °C / +105 °C
Brass

Wave soldering process

Recommended wave soldering temperature
Recommended wave soldering time, min / max

260 °C
3/4 s

Order information

Standard colour(s)
Other colours on request.

No. of poles	Cat. no.	Qty.
	● (RAL 9011)	
2	11458.4	50
3	11459.4	50
4	11460.4	50
5	11461.4	50
6	11462.4	50
7	11463.4	50
8	11464.4	50
9	11465.4	50
10	11466.4	50
11	11467.4	50
12	11468.4	50

Matching counterparts

Refer to matrix on page 100-101

Male pin block




10.16 mm

STL 130/.../10.16-V



Diagrams

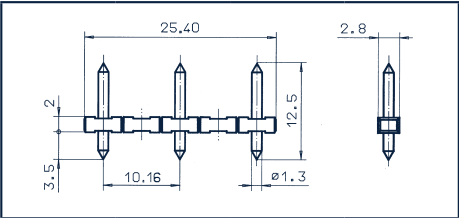

Wire connect type

Dimensions

Pitch, mm

10.16

Stripping length, mm

1.50

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

cULus*			VDE*
B	C	D	
300	150	300	630
10	10	10	7

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles	Cat. no.	Qty.
	● (RAL 9011)	
2	13696.4	50
3	13697.4	50
4	13698.4	50
5	13699.4	50
6	13700.4	50
7	13701.4	50
8	13702.4	50
9	13703.4	50
10	13704.4	50
11	13705.4	50
12	13706.4	50

Matching counterparts

Refer to matrix on page 100-101

* Approvals applied for

Male pin block



3.50 mm



STL 1550/.../3.50-V- F



STL 1550/.../3.50-H- F



Diagrams

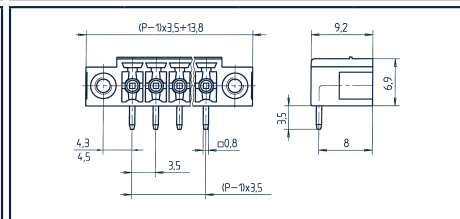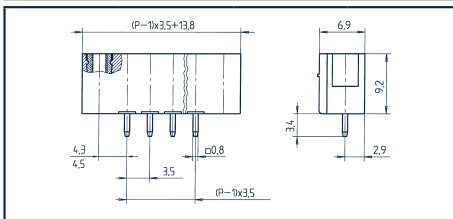

Wire connect type

Dimensions

Pitch, mm

3.50

Stripping length, mm

Drill hole diameter, mm

1.20

Ratings

User group

Rated voltage (V)

300

Rated current (A)

10

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Flange/threaded insert

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles

Cat. no.

Qty.

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

● (RAL 6018)

13753.1

13754.1

13755.1

13756.1

13757.1

13758.1

13759.1

13760.1

13761.1

13762.1

13763.1

13764.1

13765.1

13766.1

13767.1

13768.1

13769.1

13985.1

13986.1

● (RAL 6018)

13770.1

13771.1

13772.1

13773.1

13774.1

13775.1

13776.1

13777.1

13778.1

13779.1

13780.1

13781.1

13782.1

13783.1

13784.1

13785.1

13786.1

13987.1

13988.1

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K3 RD

12004.9

K3 RD

12004.9

BLS-STL2 GN

30499.1

BLS-STL2 GN

30499.1

Refer to page 186.



Refer to page 186.

Refer to matrix on pages 86-87, 100-101

Refer to matrix on pages 86-87, 100-101

* Approvals applied for

Male pin blocks

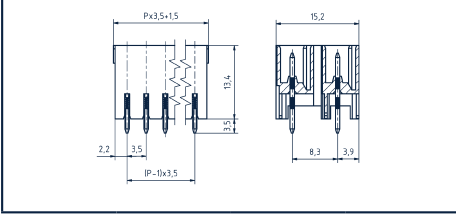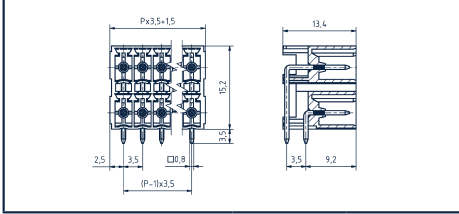Male pin block	STL 1541/.. /3.50-V-G	STL 1541/.. /3.50-H-G
 3.50 mm		
Diagrams		
Wire connect type		
Dimensions		
Pitch, mm	3.50	3.50
Stripping length, mm	1.20	1.20
Drill hole diameter, mm		
Ratings		
User group	B C D	B C D
Rated voltage (V)	300	300
Rated current (A)	10	10
Overvoltage category		
Max. cross-section, AWG/mm ²		
Rated surge voltage, kV	1.60	1.60
Torque, Nm / Screw size		
Contamination degree	3	3
Material		
Insulation material / Flammability class	LCP / UL 94 V-0	LCP / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Contact pin	Copper alloy	Copper alloy
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min / max	3/4 s	3/4 s
Order information	No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
Standard colour(s)	● (RAL 6018)	● (RAL 6018)
Other colours on request.		
	2 31892.1 50	2 31682.1 50
	3 31893.1 50	3 31683.1 50
	4 31894.1 50	4 31684.1 50
	5 31895.1 50	5 31685.1 50
	6 31896.1 50	6 31686.1 50
	7 31897.1 50	7 31687.1 50
	8 31898.1 50	8 31688.1 50
	9 31899.1 50	9 31689.1 50
	10 31900.1 50	10 31690.1 50
	11 31671.1 50	11 31691.1 50
	12 31672.1 50	12 31692.1 50
	13 31673.1 50	13 31693.1 50
	14 31674.1 50	14 31694.1 50
	15 31675.1 50	15 31695.1 50
	16 31676.1 50	16 31696.1 50
	17 31677.1 50	17 31697.1 50
	18 31678.1 50	18 31698.1 50
	19 31679.1 50	19 31699.1 50
	20 31680.1 50	20 31700.1 50
Accessories		
Dummy plug	BLS-STL2 GN	BLS-STL2 GN
Cat. no.	30499.1	30499.1
Qty.	100	100
Labelling	Refer to page 186.	Refer to page 186.
Matching counterparts	Refer to matrix on page 86-87	Refer to matrix on page 86-87

* Approvals applied for

Male pin block



3.50 mm



STL 1550/.. /3.50-V-FR



STL 1550/.. /3.50-H-FR



Diagrams

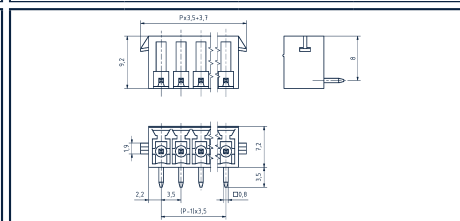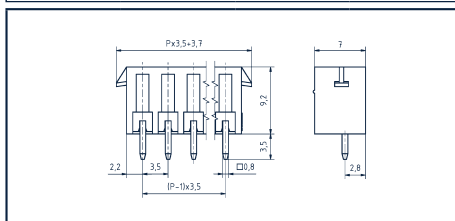

Wire connect type

Dimensions

Pitch, mm

3.50

Stripping length, mm

Drill hole diameter, mm

1.20

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

31742.1

50

3

31743.1

50

4

31744.1

50

5

31745.1

50

6

31746.1

50

7

31747.1

50

8

31748.1

50

9

31749.1

50

10

31750.1

50

11

31751.1

50

12

31752.1

50

13

31753.1

50

14

31754.1

50

15

31755.1

50

16

31756.1

50

17

31757.1

50

18

31758.1

50

19

31759.1

50

20

31760.1

50

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

31762.1

50

3

31763.1

50

4

31764.1

50

5

31765.1

50

6

31766.1

50

7

31767.1

50

8

31768.1

50

9

31769.1

50

10

31770.1

50

11

31771.1

50

12

31772.1

50

13

31773.1

50

14

31774.1

50

15

31775.1

50

16

31776.1

50

17

31777.1

50

18

31778.1

50

19

31779.1

50

20

31780.1

50

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K3 RD

12004.9

100

BLS-STL2 GN

30499.1

100

Refer to page 186.

Refer to matrix on page 86-87

K3 RD

12004.9

100

BLS-STL2 GN

30499.1

100

Refer to page 186.

Refer to matrix on page 86-87

* Approvals applied for


Male pin block





STL 1550/.../3.81-V- G



STL 1550/.../3.81-H- G

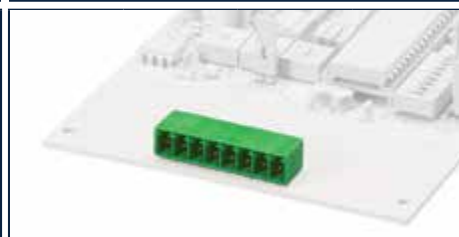

Diagrams

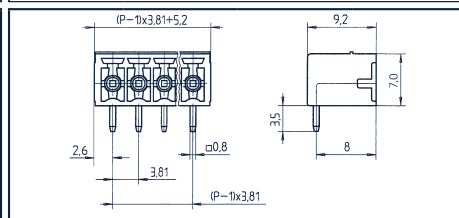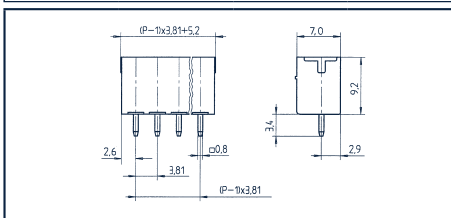

Wire connect type

Dimensions

Pitch, mm

3.81

Stripping length, mm

Drill hole diameter, mm

1.20

Ratings

User group

Rated voltage (V)

300

Rated current (A)

10

Overvoltage category

III

Max. cross-section, AWG/mm²

Rated surge voltage, kV

1.60

Torque, Nm / Screw size

1.60

2.50

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Contact pin

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min / max

3/4 s

Order information

Standard colour(s)

Other colours on request.

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

11896.1

50

3

11897.1

50

4

11898.1

50

5

11899.1

50

6

11900.1

50

7

11901.1

50

8

11902.1

50

9

11903.1

50

10

11904.1

50

11

11905.1

50

12

11906.1

50

13

11907.1

50

14

11908.1

50

15

11909.1

50

16

11910.1

50

17

13709.1

50

18

13710.1

50

19

13711.1

50

20

13712.1

50

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

11930.1

50

3

11931.1

50

4

11932.1

50

5

11933.1

50

6

11934.1

50

7

11935.1

50

8

11936.1

50

9

11937.1

50

10

11938.1

50

11

11939.1

50

12

11940.1

50

13

11941.1

50

14

11942.1

50

15

11943.1

50

16

11944.1

50

17

13713.1

50

18

13714.1

50

19

13715.1

50

20

13716.1

50

Accessories

Coding system

Cat. no.

Qty.

K3 RD

12004.9

100

Dummy plug

Cat. no.

Qty.

BLS-STL2 GN

30499.1

100

Labelling

Refer to page 186.

Matching counterparts

Refer to matrix on pages 86-87, 100-101

K3 RD

12004.9

100

BLS-STL2 GN


30499.1

100

Refer to page 186.


Refer to matrix on pages 86-87, 100-101

Male pin block




3.81 mm

STL 1590/... /3.81-G

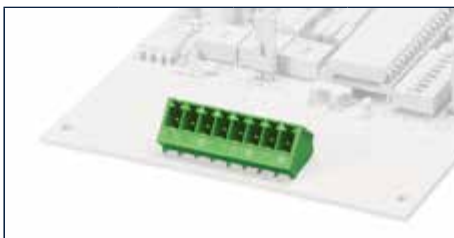

Diagrams

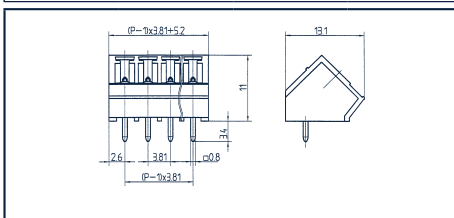

Wire connect type

Dimensions

Pitch, mm

3.81

Stripping length, mm

1.20

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

300

Rated current (A)

10

Overvoltage category



III

Max. cross-section, AWG/mm²

Rated surge voltage, kV

1.60

1.60

2.50

Torque, Nm / Screw size

Contamination degree

3

Material

Insulation material / Flammability class

PBT / UL 94 V-0

Temperature range

-40 °C / +105 °C

Contact pin

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min / max

3/4 s

Order information

Standard colour(s)

Other colours on request.

No. of poles Cat. no. Qty.

● (RAL 6018)

2 11983.1 50

3 11984.1 50

4 11985.1 50

5 11986.1 50

6 11987.1 50

7 11988.1 50

8 11989.1 50

9 11990.1 50

10 11991.1 50

11 11992.1 50

12 11993.1 50

13 11994.1 50

14 11995.1 50

15 11996.1 50

16 11997.1 50

17 11998.1 50

18 11999.1 50

19 12000.1 50

20 12001.1 50

Accessories

Coding system

Cat. no.

Qty.

K3 RD

12004.9

100

Dummy plug

Cat. no.

Qty.

BLS-STL2 GN

30499.1

100

Labelling




Refer to page 186.

Matching counterparts

Refer to matrix on pages 86-87, 100-101

* Approvals applied for

Male pin blocks

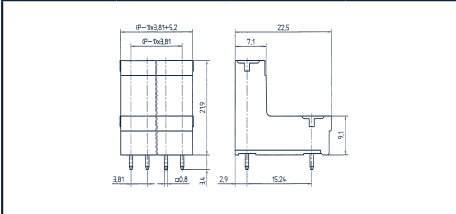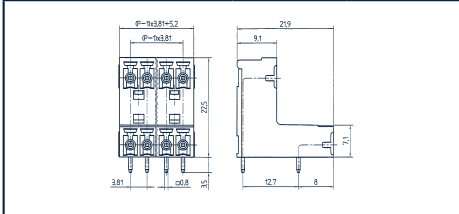Male pin block	STL 1570/.../3.81-V- G	STL 1570/.../3.81-H- G
 3.81 mm		
Diagrams		
Wire connect type		
Dimensions		
Pitch, mm	3.81	3.81
Stripping length, mm	1.20	1.20
Drill hole diameter, mm		
Ratings		
User group	B C D	B C D
Rated voltage (V)	300	300
Rated current (A)	10	10
Overtoltage category		
Max. cross-section, AWG/mm ²		
Rated surge voltage, kV	1.60	1.60
Torque, Nm / Screw size		
Contamination degree	3	3
Material		
Insulation material / Flammability class	PBT / UL 94 V-0	PBT / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Contact pin	Copper alloy	Copper alloy
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min / max	3/4 s	3/4 s
Order information	No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
Standard colour(s)	● (RAL 6018)	● (RAL 6018)
Other colours on request.		
	2 11945.1 50	2 11964.1 50
	3 11946.1 50	3 11965.1 50
	4 11947.1 50	4 11966.1 50
	5 11948.1 50	5 11967.1 50
	6 11949.1 50	6 11968.1 50
	7 11950.1 50	7 11969.1 50
	8 11951.1 50	8 11970.1 50
	9 11952.1 50	9 11971.1 50
	10 11953.1 50	10 11972.1 50
	11 11954.1 50	11 11973.1 50
	12 11955.1 50	12 11974.1 50
	13 11956.1 50	13 11975.1 50
	14 11957.1 50	14 11976.1 50
	15 11958.1 50	15 11977.1 50
	16 11959.1 50	16 11978.1 50
	17 11960.1 50	17 11979.1 50
	18 11961.1 50	18 11980.1 50
	19 11962.1 50	19 11981.1 50
	20 11963.1 50	20 11982.1 50
Accessories		
Coding system	K3 RD	K3 RD
Cat. no.	12004.9	12004.9
Dummy plug	BLS-STL2 GN	BLS-STL2 GN
Cat. no.	30499.1	30499.1
Labelling	Refer to page 186.	Refer to page 186.
Matching counterparts		
	Refer to matrix on pages 86-87, 100-101	Refer to matrix on pages 86-87, 100-101


* Approvals applied for

Male pin block



5.00 mm



STL 950/.../5.00-V

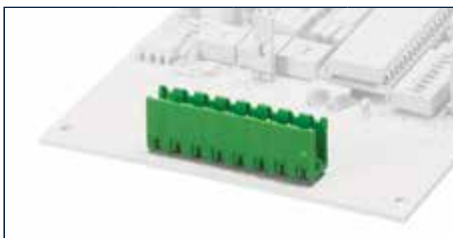

STL 950/.../5.00-H



Diagrams

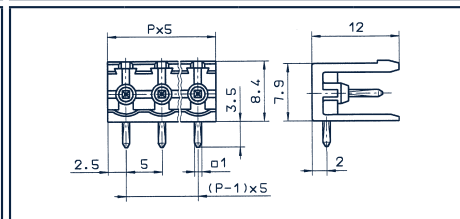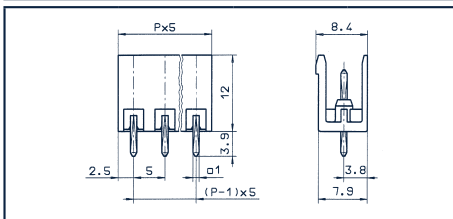

Wire connect type

Dimensions

Pitch, mm

5.00

Stripping length, mm

Drill hole diameter, mm

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

cULus				VDE
B	C	D		
300	150	300	250	
15	15	10	12	III
1.60	1.30	1.60	4.00	
				3
				PA 6.6 / UL 94 V-0
				-40 °C / +105 °C
				Copper alloy
				260 °C
				3/4 s
No. of poles	Cat. no.	Qty.		
	● (RAL 6018)			
2	11515.1	50		
3	11516.1	50		
4	11517.1	50		
5	11518.1	50		
6	11519.1	50		
7	11520.1	50		
8	11521.1	50		
9	11522.1	50		
10	11523.1	50		
11	11524.1	50		
12	11525.1	50		
13	11526.1	50		
14	11527.1	50		
15	11528.1	50		
16	11529.1	50		
17	11530.1	50		
18	11531.1	50		
19	11532.1	50		
20	11533.1	50		
21	11534.1	50		
22	11535.1	50		
23	11536.1	50		
24	11537.1	50		

cULus				VDE
B	C	D		
300	150	300	250	
15	15	10	12	III
1.60	1.30	1.60	4.00	
				3
				PA 6.6 / UL 94 V-0
				-40 °C / +105 °C
				Copper alloy
				260 °C
				3/4 s
No. of poles	Cat. no.	Qty.		
	● (RAL 6018)			
2	11561.1	50		
3	11562.1	50		
4	11563.1	50		
5	11564.1	50		
6	11565.1	50		
7	11566.1	50		
8	11567.1	50		
9	11568.1	50		
10	11569.1	50		
11	11570.1	50		
12	11571.1	50		
13	11572.1	50		
14	11573.1	50		
15	11574.1	50		
16	11575.1	50		
17	11576.1	50		
18	11577.1	50		
19	11578.1	50		
20	11579.1	50		
21	11580.1	50		
22	11581.1	50		
23	11582.1	50		
24	11583.1	50		

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD	
12003.9	100
BLS-STL2 GN	
30499.1	100
Refer to page 186.	

K2 RD	
12003.9	100
BLS-STL2 GN	
30499.1	100
Refer to page 186.	



Refer to matrix on pages 86-87, 100-101

Refer to matrix on pages 86-87, 100-101

STL 950/.../5.0-H-HC



Diagrams

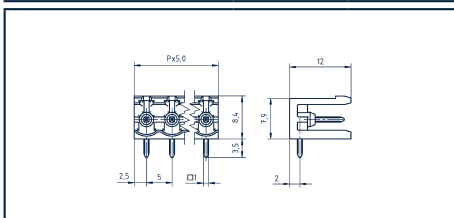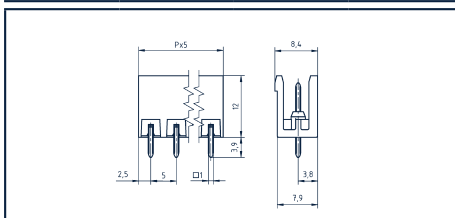[illegible]

Male pin block




5.00 mm



STL 950/.../5.00-V- G



STL 950/.../5.00-H- G

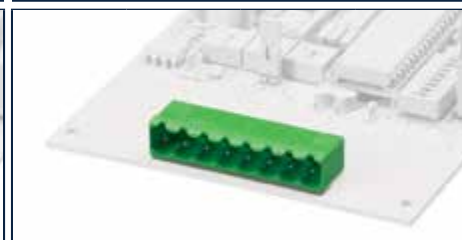

Diagrams

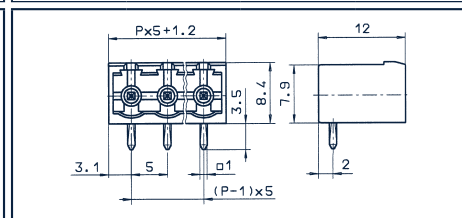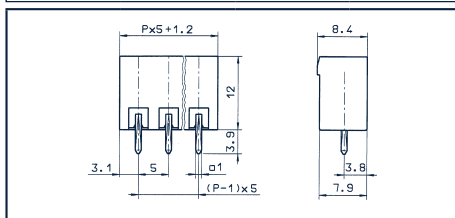

Wire connect type

Dimensions

Pitch, mm

5.00

Stripping length, mm

Drill hole diameter, mm

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

11607.1

50

3

11608.1

50

4

11609.1

50

5

11610.1

50

6

11611.1

50

7

11612.1

50

8

11613.1

50

9

11614.1

50

10

11615.1

50

11

11616.1

50

12

11617.1

50

13

11618.1

50

14

11619.1

50

15

11620.1

50

16

11621.1

50

17

11622.1

50

18

11623.1

50

19

11624.1

50

20

11625.1

50

21

11626.1

50

22

11627.1

50

23

11628.1

50

24

11629.1

50

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2

11653.1

50

3

11654.1

50

4

11655.1

50

5

11656.1

50

6

11657.1

50

7

11658.1

50

8

11659.1

50

9

11660.1

50

10

11661.1

50

11

11662.1

50

12

11663.1

50

13

11664.1

50

14

11665.1

50

15

11666.1

50

16

11667.1

50

17

11668.1

50

18

11669.1

50

19

11670.1

50

20

11671.1

50

21

11672.1

50

22

11673.1

50

23

11674.1

50

24

11675.1

50

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD

12003.9

100

BLS-STL2 GN

30499.1

100

Refer to page 186.

K2 RD

12003.9

100

BLS-STL2 GN

30499.1

100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

Refer to matrix on pages 86-87, 100-101

Male pin block



5.00 mm



STL 950/.../5.00-V- F



STL 950/.../5.00-H- F



Diagrams

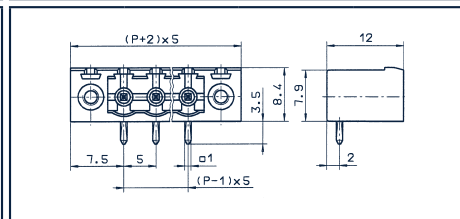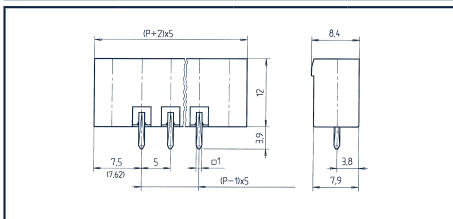

Wire connect type

Dimensions

Pitch, mm

5.00

Stripping length, mm

Drill hole diameter, mm

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Flange/threaded insert

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles Cat. no. Qty.

2 12201.1 50

3 12202.1 50

4 12203.1 50

5 12204.1 50

6 12205.1 50

7 12206.1 50

8 12207.1 50

9 12208.1 50

10 12209.1 50

11 13240.1 50

12 13241.1 50

13 13242.1 50

14 13243.1 50

15 13244.1 50

16 13245.1 50

17 13246.1 50

18 13247.1 50

19 13248.1 50

20 13249.1 50

21 13250.1 50

22 13251.1 50

23 13252.1 50

24 13253.1 50

5.00

1.40

cULus* VDE*

B C D

300 150 300 250

15 15 10 12

III

1.60 1.30 1.60 4.00

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Copper alloy

Brass

260 °C

3/4 s

No. of poles Cat. no. Qty.

2 11781.1 50

3 11782.1 50

4 11783.1 50

5 11784.1 50

6 11785.1 50

7 11786.1 50

8 11787.1 50

9 11788.1 50

10 11789.1 50

11 13254.1 50

12 13255.1 50

13 13256.1 50

14 13257.1 50

15 13258.1 50

16 13259.1 50

17 13260.1 50

18 13261.1 50

19 13262.1 50

20 13263.1 50

21 13264.1 50

22 13265.1 50

23 13266.1 50

24 13267.1 50

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD

12003.9

100

BLS-STL2 GN

30499.1

100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

K2 RD

12003.9

100

BLS-STL2 GN

30499.1

100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

* Approvals applied for



Male pin blocks

Male pin block




Diagrams

STL 950/.../5.00-V-F-HC

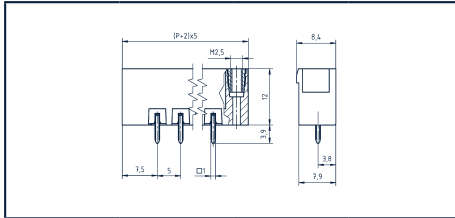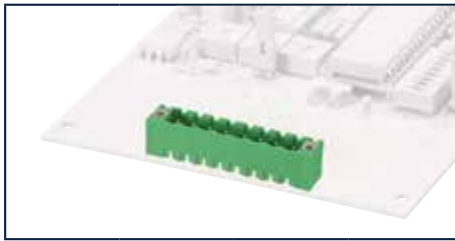

STL 950/.../5.00-H-F-HC

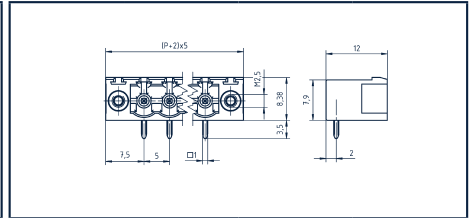

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Flange/threaded insert

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

5.00

5.00

1.40

1.40

cULus*

VDE*

B C D

300 150 300 250

16 16 10 16

III

1.60 1.30 1.60 4.00

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Copper alloy

Brass

260 °C

3/4 s

No. of poles Cat. no. Qty.

● (RAL 6018)

2 30582.1 50

3 30583.1 50

4 30584.1 50

5 30585.1 50

6 30586.1 50

7 30587.1 50

8 30588.1 50

9 30589.1 50

10 30590.1 50

11 30591.1 50

12 30592.1 50

cULus*

VDE*

B C D

300 150 300 250

16 16 10 16

III

1.60 1.30 1.60 4.00

3

PA 6.6 / UL 94 V-0

-40 °C / +105 °C

Copper alloy

Brass

260 °C

3/4 s

No. of poles Cat. no. Qty.

● (RAL 6018)

2 30602.1 50

3 30603.1 50

4 30604.1 50

5 30605.1 50

6 30606.1 50

7 30607.1 50

8 30608.1 50

9 30609.1 50

10 30610.1 50

11 30611.1 50

12 30612.1 50

K2 RD

12003.9 100

BLS-STL2 GN

30499.1 100

Refer to page 186.

Refer to matrix on page 100-101

K2 RD

12003.9 100

BLS-STL2 GN

30499.1 100



Refer to page 186.

Refer to matrix on page 100-101

* Approvals applied for

Male pin block		STL 975/.../5.00-V- G				STL 975/.../5.00-H- G			
5.00 mm									
Diagrams									
Wire connect type									
Dimensions									
Pitch, mm		5.00				5.00			
Stripping length, mm									
Drill hole diameter, mm		1.40				1.40			
Ratings									
User group		cULus 				cULus 			
Rated voltage (V)		B 300	C 150	D 300	250	B 300	C 150	D 300	250
Rated current (A)		15	15	10	12	15	15	10	12
Overvoltage category		III				III			
Max. cross-section, AWG/mm²									
Rated surge voltage, kV		1.60	1.30	1.60	4.00	1.60	1.30	1.60	4.00
Torque, Nm / Screw size									
Contamination degree		3				3			
Material									
Insulation material / Flammability class		PA 6.6 / UL 94 V-0				PA 6.6 / UL 94 V-0			
Temperature range		-40 °C / +105 °C				-40 °C / +105 °C			
Contact pin		Copper alloy				Copper alloy			
Wave soldering process									
Recommended wave soldering temperature		260 °C				260 °C			
Recommended wave soldering time, min / max		3/4 s				3/4 s			
Order information		No. of poles Cat. no. Qty.				No. of poles Cat. no. Qty.			
Standard colour(s)		● (RAL 6018)				● (RAL 6018)			
Other colours on request.		2	11799.1	50		2	11822.1	50	
		3	11800.1	50		3	11823.1	50	
		4	11801.1	50		4	11824.1	50	
		5	11802.1	50		5	11825.1	50	
		6	11803.1	50		6	11826.1	50	
		7	11804.1	50		7	11827.1	50	
		8	11805.1	50		8	11828.1	50	
		9	11806.1	50		9	11829.1	50	
		10	11807.1	50		10	11830.1	50	
		11	11808.1	50		11	11831.1	50	
		12	11809.1	50		12	11832.1	50	
		13	11810.1	50		13	11833.1	50	
		14	11811.1	50		14	11834.1	50	
		15	11812.1	50		15	11835.1	50	
		16	11813.1	50		16	11836.1	50	
		17	11814.1	50		17	11837.1	50	
		18	11815.1	50		18	11838.1	50	
		19	11816.1	50		19	11839.1	50	
		20	11817.1	50		20	11840.1	50	
		21	11818.1	50		21	11841.1	50	
		22	11819.1	50		22	11842.1	50	
		23	11820.1	50		23	11843.1	50	
		24	11821.1	50		24	11844.1	50	
		1 pole = 2 electrical connections				1 pole = 2 electrical connections			
Accessories									
Coding system		K2 RD				K2 RD			
Cat. no.		12003.9		100		12003.9			100
Dummy plug		BLS-STL2 GN				BLS-STL2 GN			
Cat. no.		30499.1		100		30499.1			100
Labelling		Refer to page 186.				Refer to page 186.			
Matching counterparts		Refer to matrix on pages 86-87, 100-101				Refer to matrix on pages 86-87, 100-101			

Male pin blocks

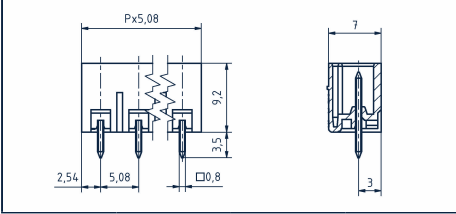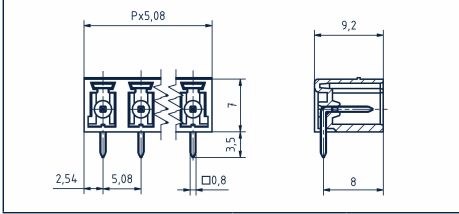Male pin block	STLZ 1520/.../5.08-V-G	STLZ 1520/.../5.08-H-G
 5.08 mm		
Diagrams		
Wire connect type		
Dimensions		
Pitch, mm	5.08	5.08
Stripping length, mm	1.20	1.20
Drill hole diameter, mm		
Ratings		
User group	B C D	B C D
Rated voltage (V)	300	300
Rated current (A)	8	8
Overvoltage category		
Max. cross-section, AWG/mm ²		
Rated surge voltage, kV	1.60	1.60
Torque, Nm / Screw size		
Contamination degree	3	
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Contact pin	Copper alloy	Copper alloy
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min / max	3/4 s	3/4 s
Order information	No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
Standard colour(s)	● (RAL 6018)	● (RAL 6018)
Other colours on request.		
	2 31782.1 200	2 31802.1 200
	3 31783.1 200	3 31803.1 200
	4 31784.1 200	4 31804.1 200
	5 31785.1 100	5 31805.1 100
	6 31786.1 50	6 31806.1 50
	7 31787.1 50	7 31807.1 50
	8 31788.1 50	8 31808.1 50
	9 31789.1 50	9 31809.1 50
	10 31790.1 50	10 31810.1 50
	11 31791.1 50	11 31811.1 50
	12 31792.1 50	12 31812.1 50
Accessories		
Coding system	K3 RD	K3 RD
Cat. no. Qty.	12004.9 100	12004.9 100
Dummy plug	BLS-STL2 GN	BLS-STL2 GN
Cat. no. Qty.	30499.1 100	30499.1 100
Labelling	Refer to page 186.	Refer to page 186.
Matching counterparts		
	Refer to matrix on page 100-101	Refer to matrix on page 100-101

* Approvals applied for

Male pin block



5.08 mm



STL 950/.../5.08-V



STL 950/.../5.08-H



Diagrams

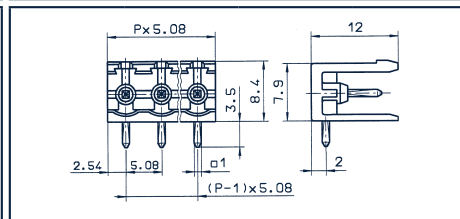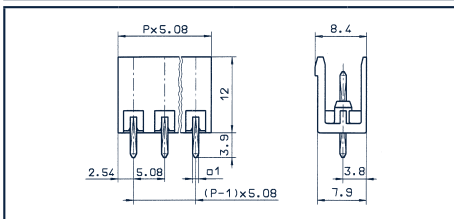

Wire connect type

Dimensions

Pitch, mm

5.08

Stripping length, mm

Drill hole diameter, mm

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

cULus				VDE
B	C	D		
300	150	300	250	
15	15	10	12	
				III
1.60	1.30	1.60	4.00	
				3
PA 6.6 / UL 94 V-0				
-40 °C / +105 °C				
Copper alloy				
260 °C				
3/4 s				
No. of poles	Cat. no.	Qty.		
	● (RAL 6018)			
2	11538.1	50		
3	11539.1	50		
4	11540.1	50		
5	11541.1	50		
6	11542.1	50		
7	11543.1	50		
8	11544.1	50		
9	11545.1	50		
10	11546.1	50		
11	11547.1	50		
12	11548.1	50		
13	11549.1	50		
14	11550.1	50		
15	11551.1	50		
16	11552.1	50		
17	11553.1	50		
18	11554.1	50		
19	11555.1	50		
20	11556.1	50		
21	11557.1	50		
22	11558.1	50		
23	11559.1	50		
24	11560.1	50		

cULus				VDE
B	C	D		
300	150	300	250	
15	15	10	12	
				III
1.60	1.30	1.60	4.00	
				3
PA 6.6 / UL 94 V-0				
-40 °C / +105 °C				
Copper alloy				
260 °C				
3/4 s				
No. of poles	Cat. no.	Qty.		
	● (RAL 6018)			
2	11584.1	50		
3	11585.1	50		
4	11586.1	50		
5	11587.1	50		
6	11588.1	50		
7	11589.1	50		
8	11590.1	50		
9	11591.1	50		
10	11592.1	50		
11	11593.1	50		
12	11594.1	50		
13	11595.1	50		
14	11596.1	50		
15	11597.1	50		
16	11598.1	50		
17	11599.1	50		
18	11600.1	50		
19	11601.1	50		
20	11602.1	50		
21	11603.1	50		
22	11604.1	50		
23	11605.1	50		
24	11606.1	50		

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD	
12003.9	100
BLS-STL2 GN	
30499.1	100
Refer to page 186.	

Refer to matrix on pages 86-87, 100-101

K2 RD	
12003.9	100
BLS-STL2 GN	
30499.1	100
Refer to page 186.	

Refer to matrix on pages 86-87, 100-101

Male pin block



5.08 mm



STL 950/.../5.08-V- G



STL 950/.../5.08-H- G



Diagrams

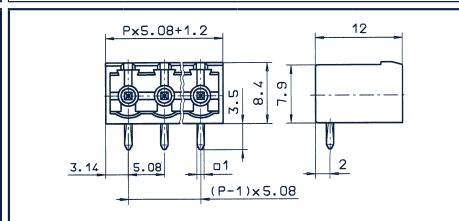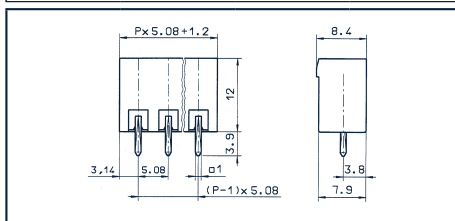

Wire connect type

Dimensions

Pitch, mm

5.08

Stripping length, mm

Drill hole diameter, mm

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2 11630.1 50

3 11631.1 50

4 11632.1 50

5 11633.1 50

6 11634.1 50

7 11635.1 50

8 11636.1 50

9 11637.1 50

10 11638.1 50

11 11639.1 50

12 11640.1 50

13 11641.1 50

14 11642.1 50

15 11643.1 50

16 11644.1 50

17 11645.1 50

18 11646.1 50

19 11647.1 50

20 11648.1 50

21 11649.1 50

22 11650.1 50

23 11651.1 50

24 11652.1 50

5.08

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2 11676.1 50

3 11677.1 50

4 11678.1 50

5 11679.1 50

6 11680.1 50

7 11681.1 50

8 11682.1 50

9 11683.1 50

10 11684.1 50

11 11685.1 50

12 11686.1 50

13 11687.1 50

14 11688.1 50

15 11689.1 50

16 11690.1 50

17 11691.1 50

18 11692.1 50

19 11693.1 50

20 11694.1 50

21 11695.1 50

22 11696.1 50

23 11697.1 50

24 11698.1 50

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD

12003.9

100

BLS-STL2 GN

30499.1

100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

K2 RD

12003.9

100

BLS-STL2 GN

30499.1

100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

154 **Dynamic Measurement & Control Solutions** www.dynamicrep.com sales@dynamicrep.com 408-780-9190

Male pin block



5.08 mm



STL 950/.../5.08-V- F



STL 950/.../5.08-H- F



Diagrams

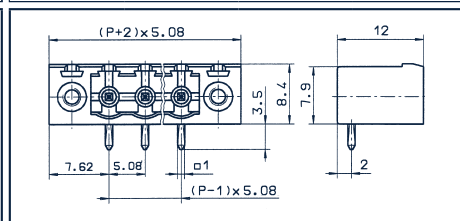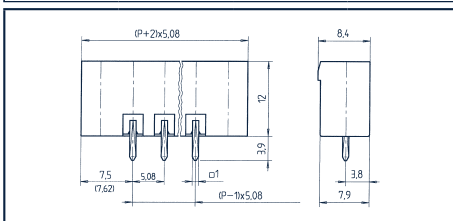

Wire connect type

Dimensions

Pitch, mm

5.08

Stripping length, mm

Drill hole diameter, mm

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Flange/threaded insert

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

cULus*				VDE*	
B	C	D			
300	150	300		250	
15	15	10		12	
				III	
1.60	1.30	1.60		4.00	
				3	
PA 6.6 / UL 94 V-0					
-40 °C / +105 °C					
Copper alloy					
Brass					
260 °C					
3/4 s					

cULus*				VDE*	
B	C	D			
300	150	300		250	
15	15	10		12	
				III	
1.60	1.30	1.60		4.00	
				3	
PA 6.6 / UL 94 V-0					
-40 °C / +105 °C					
Copper alloy					
Brass					
260 °C					
3/4 s					

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	12210.1	50
3	12211.1	50
4	12212.1	50
5	12213.1	50
6	12214.1	50
7	12215.1	50
8	12216.1	50
9	12217.1	50
10	12218.1	50
11	13198.1	50
12	13199.1	50
13	13200.1	50
14	13201.1	50
15	13202.1	50
16	13203.1	50
17	13204.1	50
18	13205.1	50
19	13206.1	50
20	13207.1	50
21	13208.1	50
22	13209.1	50
23	13210.1	50
24	13211.1	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	11790.1	50
3	11791.1	50
4	11792.1	50
5	11793.1	50
6	11794.1	50
7	11795.1	50
8	11796.1	50
9	11797.1	50
10	11798.1	50
11	13268.1	50
12	13269.1	50
13	13270.1	50
14	13271.1	50
15	13272.1	50
16	13273.1	50
17	13274.1	50
18	13275.1	50
19	13276.1	50
20	13277.1	50
21	13278.1	50
22	13279.1	50
23	13280.1	50
24	13281.1	50

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD	
12003.9	100
BLS-STL2 GN	
30499.1	100
Refer to page 186.	

K2 RD	
12003.9	100
BLS-STL2 GN	
30499.1	100
Refer to page 186.	

Refer to matrix on pages 86-87, 100-101

Refer to matrix on pages 86-87, 100-101


* Approvals applied for

Male pin block

STL 990/... /5.08-G



Diagrams

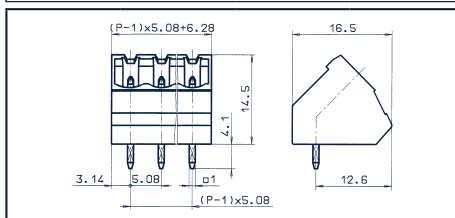

Wire connect type

Dimensions

Pitch, mm

5.08

Stripping length, mm

1.40

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

cULus			
B	C	D	
300	150	300	250
15	15	10	10
			III
1.60	1.30	1.60	4.00
			3

PA 6.6 / UL 94 V-0
 -40 °C / +105 °C
 Copper alloy

260 °C
 3/4 s

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	11845.1	50
3	11846.1	50
4	11847.1	50
5	11848.1	50
6	11849.1	50
7	11850.1	50
8	11851.1	50
9	11852.1	50
10	11853.1	50
11	11854.1	50
12	11855.1	50
13	11856.1	50
14	11857.1	50
15	11858.1	50
16	11859.1	50
17	11860.1	50
18	11861.1	50
19	11862.1	50
20	11863.1	50
21	11864.1	50
22	11865.1	50
23	11866.1	50
24	11867.1	50

Accessories

Coding system

Cat. no.

Qty.

K2 RD

12003.9

100

Dummy plug

Cat. no.

Qty.

BLS-STL2 GN

30499.1

100



Labelling

Refer to page 186.

Matching counterparts

Refer to matrix on pages 86-87, 100-101

Male pin blocks

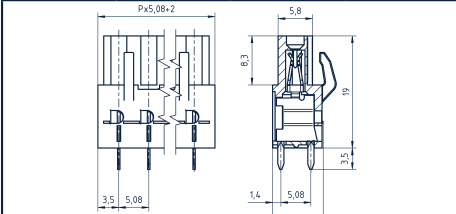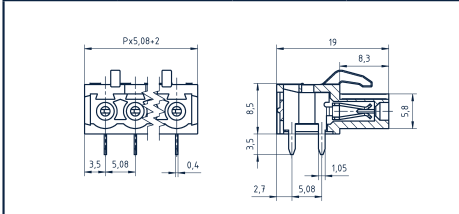Male pin block		ISTLZ 950/... /5.08-V	ISTLZ 950/... /5.08-H
 5.08 mm			
Diagrams			
Wire connect type			
Dimensions			
Pitch, mm		5.08	5.08
Stripping length, mm		1.40	1.40
Drill hole diameter, mm			
Ratings			
User group		B C D	B C D
Rated voltage (V)		300	300
Rated current (A)		15	15
Overvoltage category			
Max. cross-section, AWG/mm ²			
Rated surge voltage, kV		1.60	1.60
Torque, Nm / Screw size			
Contamination degree		3	3
Material			
Insulation material / Flammability class		PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range		-40 °C / +105 °C	-40 °C / +105 °C
Contact spring		Bronze	Bronze
Wave soldering process			
Recommended wave soldering temperature		260 °C	260 °C
Recommended wave soldering time, min / max		3/4 s	3/4 s
Order information		No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
Standard colour(s)		● (RAL 6018)	● (RAL 6018)
Other colours on request.			
		2 14173.1 50	2 14150.1 50
		3 14174.1 50	3 14151.1 50
		4 14175.1 50	4 14152.1 50
		5 14176.1 50	5 14153.1 50
		6 14177.1 50	6 14154.1 50
		7 14178.1 50	7 14155.1 50
		8 14179.1 50	8 14156.1 50
		9 14180.1 50	9 14157.1 50
		10 14181.1 50	10 14158.1 50
		11 14182.1 50	11 14159.1 50
		12 14183.1 50	12 14160.1 50
		13 14184.1 50	13 14161.1 50
		14 14185.1 50	14 14162.1 50
		15 14186.1 50	15 14163.1 50
		16 14187.1 50	16 14164.1 50
		17 14188.1 50	17 14165.1 50
		18 14189.1 50	18 14166.1 50
		19 14190.1 50	19 14167.1 50
		20 14191.1 50	20 14168.1 50
		21 14192.1 50	21 14169.1 50
		22 14193.1 50	22 14170.1 50
		23 14194.1 50	23 14171.1 50
		24 14195.1 50	24 14172.1 50
Accessories			
Coding system		K4 RD	K4 RD
Cat. no.		14309.4	14309.4
Labelling		Refer to page 186.	Refer to page 186.
Matching counterparts		Refer to matrix on page 100-101	Refer to matrix on page 100-101

Male pin block



5.08 mm



STL 970/.../5.08-V



STL 970/.../5.08-H



Diagrams

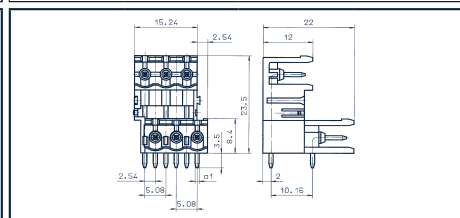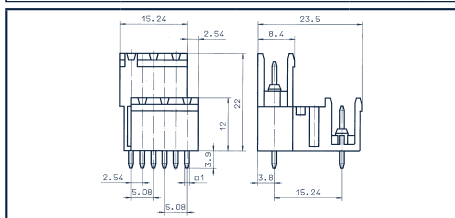

Wire connect type

Dimensions

Pitch, mm

5.08

Stripping length, mm

Drill hole diameter, mm

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2	11759.1	50
3	11760.1	50
4	11761.1	50
5	11762.1	50
6	11763.1	50
7	11764.1	50
8	11765.1	50
9	11766.1	50
10	11767.1	50
11	11768.1	50
12	11769.1	50
13	12738.1	50
14	12739.1	50
15	12740.1	50
16	12741.1	50
17	12742.1	50
18	12743.1	50
19	12744.1	50
20	12745.1	50
21	12746.1	50
22	12747.1	50
23	12748.1	50
24	12749.1	50

1 pole = 2 electrical connections

No. of poles

Cat. no.

Qty.

● (RAL 6018)

2	11770.1	50
3	11771.1	50
4	11772.1	50
5	11773.1	50
6	11774.1	50
7	11775.1	50
8	11776.1	50
9	11777.1	50
10	11778.1	50
11	11779.1	50
12	11780.1	50
13	12750.1	50
14	12751.1	50
15	12752.1	50
16	12753.1	50
17	12754.1	50
18	12755.1	50
19	12756.1	50
20	12757.1	50
21	12758.1	50
22	12759.1	50
23	12760.1	50
24	12761.1	50

1 pole = 2 electrical connections

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD

12003.9

100

BLS-STL GN

13284.1

100

Refer to page 186.

K2 RD

12003.9

100

BLS-STL GN

13284.1

100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

Refer to matrix on pages 86-87, 100-101

Male pin blocks


Male pin block




5.08 mm

Diagrams

STL 970/.../5.08-V-G

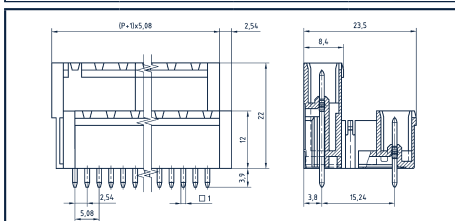

STL 970/.../5.08-H-G

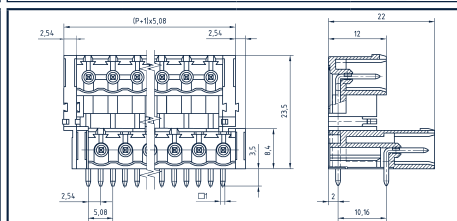

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

5.08

1.40

cULus

B C D

300 150 300 250

15 15 10 12

III

1.60 1.30 1.60 4.00

3

PBT / UL 94 V-0

-40 °C / +105 °C

Copper alloy

260 °C

3/4 s

No. of poles Cat. no. Qty.

● (RAL 6018)

2 13429.1 50

3 13430.1 50

4 13431.1 50

5 13432.1 50

6 13433.1 50

7 13434.1 50

8 13435.1 50

9 13436.1 50

10 13437.1 50

11 13438.1 50

12 13439.1 50

1 pole = 2 electrical connections

K2 RD

12003.9 100

BLS-STL GN

13284.1 100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

5.08

1.40

cULus

B C D

300 150 300 250

15 15 10 12

III

1.60 1.30 1.60 4.00

3

PBT / UL 94 V-0

-40 °C / +105 °C

Copper alloy

260 °C

3/4 s

No. of poles Cat. no. Qty.

● (RAL 6018)

2 13440.1 50

3 13441.1 50

4 13442.1 50

5 13443.1 50

6 13444.1 50

7 13445.1 50

8 13446.1 50

9 13447.1 50

10 13448.1 50

11 13449.1 50

12 13450.1 50

1 pole = 2 electrical connections

K2 RD

12003.9 100

BLS-STL GN

13284.1 100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

Male pin block



5.08 mm



STL 970/.../5.08-V- F



STL 970/.../5.08-H- F



Diagrams

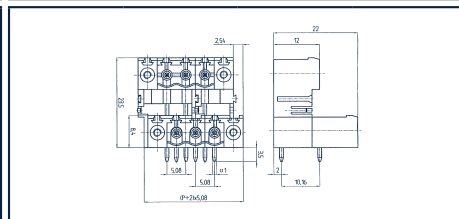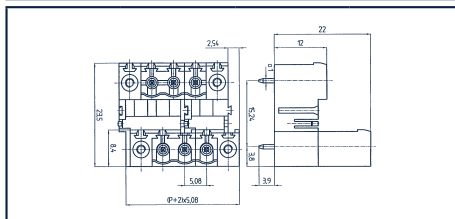

Wire connect type

Dimensions

Pitch, mm

5.08

Stripping length, mm

Drill hole diameter, mm

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Flange/threaded insert

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles

Cat. no.

● (RAL 6018)

2 13451.1 50

3 13452.1 50

4 13453.1 50

5 13454.1 50

6 13455.1 50

7 13456.1 50

8 13457.1 50

9 13458.1 50

10 13459.1 50

11 13460.1 50

12 13461.1 50

1 pole = 2 electrical connections

No. of poles

Cat. no.

● (RAL 6018)

2 13462.1 50

3 13463.1 50

4 13464.1 50

5 13465.1 50

6 13466.1 50

7 13467.1 50

8 13468.1 50

9 13469.1 50

10 13470.1 50

11 13471.1 50

12 13472.1 50

1 pole = 2 electrical connections

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD

12003.9

100

BLS-STL GN

13284.1

100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

K2 RD

12003.9

100

BLS-STL GN

13284.1

100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

* Approvals applied for

Male pin blocks


Male pin block




7.62 mm

Diagrams

STL 960/.../7.62-V

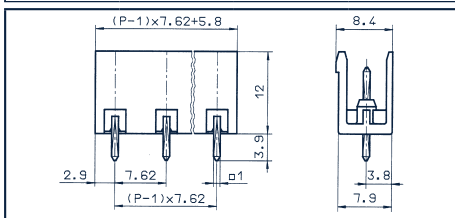

STL 960/.../7.62-H

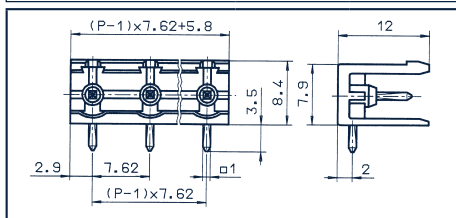

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

cULus				VDE
B	C	D		
300	150	300		400
15	15	10		12
				III
1.60	1.30	1.60		4.00
				3
PA 6.6 / UL 94 V-0				
-40 °C / +105 °C				
Copper alloy				
260 °C				
3/4 s				

cULus				VDE
B	C	D		
300	150	300		400
15	15	10		12
				III
1.60	1.30	1.60		4.00
				3
PA 6.6 / UL 94 V-0				
-40 °C / +105 °C				
Copper alloy				
260 °C				
3/4 s				

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	11699.1	50
3	11700.1	50
4	11701.1	50
5	11702.1	50
6	11703.1	50
7	11704.1	50
8	11705.1	50
9	11706.1	50
10	11707.1	50
11	11708.1	50
12	11709.1	50
13	11710.1	50
14	11711.1	50
15	11712.1	50
16	11713.1	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	11714.1	50
3	11715.1	50
4	11716.1	50
5	11717.1	50
6	11718.1	50
7	11719.1	50
8	11720.1	50
9	11721.1	50
10	11722.1	50
11	11723.1	50
12	11724.1	50
13	11725.1	50
14	11726.1	50
15	11727.1	50
16	11728.1	50

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD	
12003.9	100
BLS-STL GN	
13284.1	100
Refer to page 186.	

K2 RD	
12003.9	100
BLS-STL GN	
13284.1	100
Refer to page 186.	

Refer to matrix on pages 86-87, 100-101

Refer to matrix on pages 86-87, 100-101

Male pin block



7.62 mm



STL 960/.../7.62-V- G



STL 960/.../7.62-H- G



Diagrams

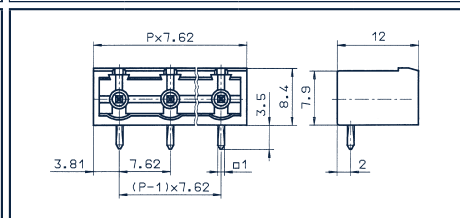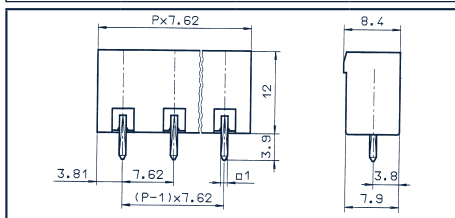

Wire connect type

Dimensions

Pitch, mm

7.62

Stripping length, mm

Drill hole diameter, mm

1.40

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	11729.1	50
3	11730.1	50
4	11731.1	50
5	11732.1	50
6	11733.1	50
7	11734.1	50
8	11735.1	50
9	11736.1	50
10	11737.1	50
11	11738.1	50
12	11739.1	50
13	11740.1	50
14	11741.1	50
15	11742.1	50
16	11743.1	50

No. of poles	Cat. no.	Qty.
	● (RAL 6018)	
2	11744.1	50
3	11745.1	50
4	11746.1	50
5	11747.1	50
6	11748.1	50
7	11749.1	50
8	11750.1	50
9	11751.1	50
10	11752.1	50
11	11753.1	50
12	11754.1	50
13	11755.1	50
14	11756.1	50
15	11757.1	50
16	11758.1	50

Accessories

Coding system

Cat. no.

Qty.

Dummy plug

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD

12003.9

100

BLS-STL GN

13284.1

100

Refer to page 186.

K2 RD

12003.9

100

BLS-STL GN

13284.1

100

Refer to page 186.

Refer to matrix on pages 86-87, 100-101

Refer to matrix on pages 86-87, 100-101

Male pin blocks

Male pin block



Diagrams

Wire connect type

Dimensions

Pitch, mm

Stripping length, mm

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

Rated current (A)

Overvoltage category

Max. cross-section, AWG/mm²

Rated surge voltage, kV

Torque, Nm / Screw size

Contamination degree

Material

Insulation material / Flammability class

Temperature range

Contact pin

Flange/threaded insert

Wave soldering process

Recommended wave soldering temperature

Recommended wave soldering time, min / max

Order information

Standard colour(s)

Other colours on request.

Accessories

Coding system

Cat. no.

Qty.

Dummy plug



Cat. no.

Qty.


Labelling

Matching counterparts

STLZ 965/.../7.62 V-F

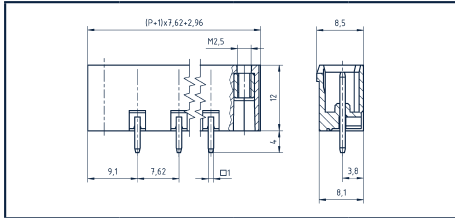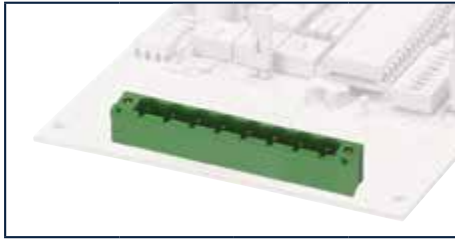

STLZ 965/.../7.62 H-F

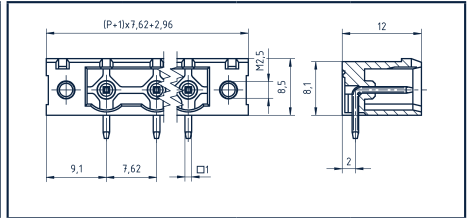

Pitch, mm

7.62

7.62

1.40

1.40

cULus

VDE

B

C

D

B

C

D

VDE

300

300

250

15

10

12

III

1.60

1.60

4.00

3

PBT / UL 94 V-0

-40 °C / +105 °C

Brass

Brass

PBT / UL 94 V-0

-40 °C / +105 °C

Brass

Brass

260 °C

260 °C

3/4 s

3/4 s

No. of poles

Cat. no.

Qty.

2

● (RAL 6018)

50

3

14279.1

50

4

14280.1

50

5

14281.1

50

6

14282.1

50

7

14283.1

50

8

14284.1

50

9

14285.1

50

10

14286.1

50

11

14287.1

50

12

14288.1

50

13

14289.1

50

14

14290.1

50

15

14291.1

50

16

14292.1

50

17

14293.1

50

No. of poles

Cat. no.

Qty.

2

● (RAL 6018)

50

3

14264.1

50

4

14265.1

50

5

14266.1

50

6

14267.1

50

7

14268.1

50

8

14269.1

50

9

14270.1

50

10

14271.1

50

11

14272.1

50

12

14273.1

50

13

14274.1

50

14

14275.1

50

15

14276.1

50

16

14277.1

50

17

14278.1

50

K2 RD

12003.9

100

BLS-STL GN

13284.1

100

Refer to page 186.

K2 RD

12003.9

100

BLS-STL GN

13284.1

100

Refer to page 186.

Refer to matrix on page 100-101

Refer to matrix on page 100-101

Male pin block




7.62 mm



STLZ 1550/... /7.62-V-G



STLZ 1550/... /7.62-H-G

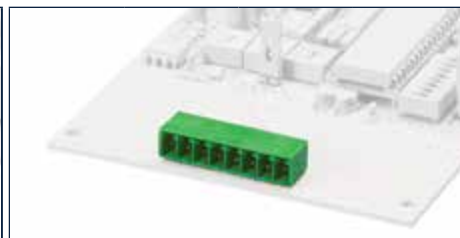

Diagrams

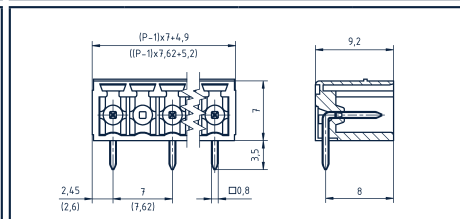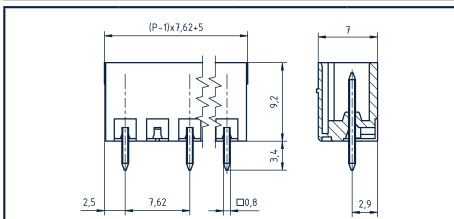

Wire connect type

Dimensions

Pitch, mm

7.62

7.62

Stripping length, mm

1.20

1.20

Drill hole diameter, mm

Ratings

User group

Rated voltage (V)

300

300

500

Rated current (A)

8

9

Overvoltage category

III

Max. cross-section, AWG/mm²

Rated surge voltage, kV

1.60

1.60

6.00

Torque, Nm / Screw size

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Contact pin

Copper alloy

Wave soldering process

Recommended wave soldering temperature

260 °C

Recommended wave soldering time, min / max

3/4 s

Order information

Standard colour(s)

● (RAL 6018)

Other colours on request.

No. of poles

Cat. no.

Qty.

2

31822.1

200

3

31823.1

200

4

31824.1

100

5

31825.1

50

6

31826.1

50

7

31827.1

50

8

31828.1

50

9

31829.1

50

10

31830.1

50

No. of poles

Cat. no.

Qty.

2

31832.1

200

3

31833.1

200

4

31834.1

100

5

31835.1

50

6

31836.1

50

7

31837.1

50

8

31838.1

50

9

31839.1

50

10

31840.1

50

Accessories

Coding system

Cat. no.

Qty.

K3 RD

12004.9

100

Dummy plug

Cat. no.

Qty.

BLS-STL2 GN

30499.1

100

Labelling

Refer to page 186.

Matching counterparts

Refer to matrix on page 86-87

K3 RD

12004.9

100

BLS-STL2 GN

30499.1



100

Refer to page 186.

Refer to matrix on page 86-87

* Approvals applied for

Male pin blocks

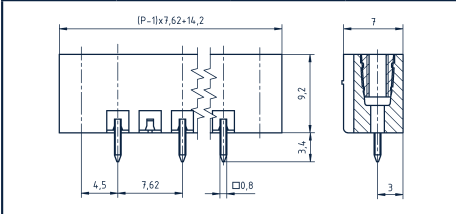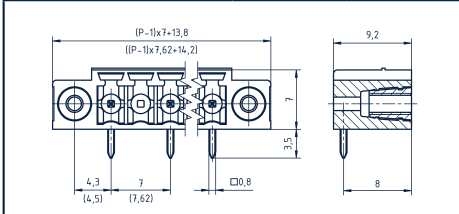Male pin block	STLZ 1550/.../7.62-V-F	STLZ 1550/... /7.62-H-F
 7.62 mm		
Diagrams		
Wire connect type		
Dimensions		
Pitch, mm	7.62	7.62
Stripping length, mm	1.20	1.20
Drill hole diameter, mm		
Ratings		
User group	B C D	B C D
Rated voltage (V)	300	300
Rated current (A)	8	8
Overvoltage category		
Max. cross-section, AWG/mm ²		
Rated surge voltage, kV	1.60	1.60
Torque, Nm / Screw size		
Contamination degree	3	3
Material		
Insulation material / Flammability class	PA 6.6 / UL 94 V-0	PA 6.6 / UL 94 V-0
Temperature range	-40 °C / +105 °C	-40 °C / +105 °C
Contact pin	Copper alloy	Copper alloy
Flange/threaded insert	Brass	Brass
Wave soldering process		
Recommended wave soldering temperature	260 °C	260 °C
Recommended wave soldering time, min / max	3/4 s	3/4 s
Order information	No. of poles Cat. no. Qty.	No. of poles Cat. no. Qty.
Standard colour(s)	● (RAL 6018)	● (RAL 6018)
Other colours on request.		
	2 31842.1 100	2 31852.1 100
	3 31843.1 100	3 31853.1 100
	4 31844.1 50	4 31854.1 50
	5 31845.1 50	5 31855.1 50
	6 31846.1 50	6 31856.1 50
	7 31847.1 50	7 31857.1 50
	8 31848.1 50	8 31858.1 50
	9 31849.1 50	9 31859.1 50
	10 31850.1 50	10 31860.1 50
Accessories		
Coding system	K3 RD	K3 RD
Cat. no.	12004.9	12004.9
Dummy plug	BLS-STL2 GN	BLS-STL2 GN
Cat. no.	30499.1	30499.1
Labelling	Refer to page 186.	Refer to page 186.
Matching counterparts		
	Refer to matrix on page 86-87	Refer to matrix on page 86-87

* Approvals applied for

Notes

A large rectangular area filled with a grid of small, light gray dotted lines, intended for handwritten notes.

Plug-in connector for DIN rail

The pluggable **PK-TS** connection system was designed to meet the increasing demands for modularity and flexibility within the fields of electrical cabinet and facility construction.

The system allows you to easily integrate separately wired switchboard panels into the complete installation. The wiring which connects the two switchboard panels is fed out of one panel with the **PK-TS** base element. The corresponding cables are placed on their counterpart in the second panel.

The **PK-TS** base element is attached to the DIN rail using mounting feet which are fitted either with a TS15/35 or TS32/35 combi-foot for mounting on a TS15, TS32 or TS35 DIN rail.


After setting up the switchgear cabinets, both panels can be connected quite easily. You decide the type of wire connection technology (push-in, clamping yoke or eccentric) by selecting the plug-in connection element.

The **PK-TS** elements are available with 2 to 24 poles and also with a screw flange. The **PK-TS** base elements with a screw flange use this flange to connect to the pluggable wire-connection component. This protects them from accidental loosening.

Wires can be connected from different directions, depending on the selection of the **PK-TS** combination and counterpart. (Refer to info at right.)

To avoid incorrect mating when using several **PK-TS** in one panel, both the **PK-TS** and its counterpart can be coded without loss of poles by using our proven CONTA-CON coding system (page 184).

You will find many labelling options starting on page 186 of this catalogue.

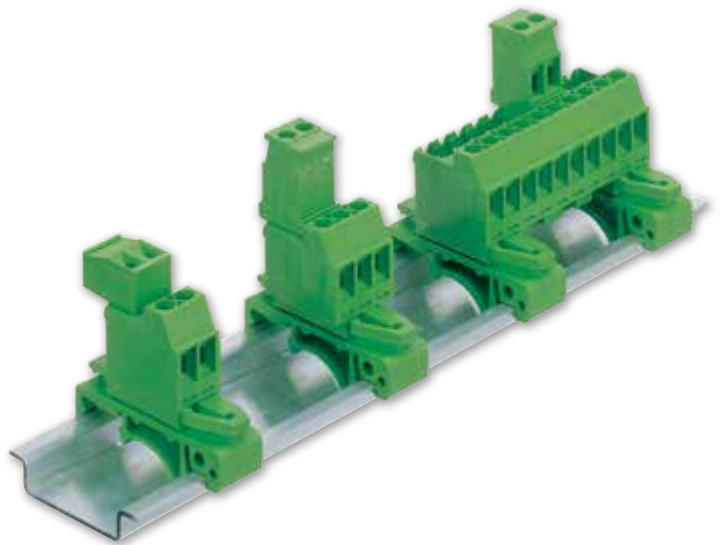

Features

- Screw connection system
- Wire cross-section up to 2.5 mm²
- Material: PA 6.6 UL 94 V-0
- Up to 24 poles
- Good electrical and mechanical characteristics
- Mounting onto TS 15, TS 32 or TS 35
- With or without flange

PK-TS combined with PKB 950

- Wire entry **PK-TS**: Horizontal from right
- Wire entry **PKB 950**: Vertical from above

**PK-TS combined with PKB 1100**

- Wire entry **PK-TS**: Horizontal from right
- Wire entry **PKB 1100**: Horizontal from left

**PK-TS combined with PKB 1110**



- Wire entry **PK-TS**: Horizontal from right
- Wire entry **PKB 1110**: Horizontal from right

**PK-TS combined with PBT 1200**

- Wire entry **PK-TS**: Horizontal from right
- Wire entry **PBT 1200**: Vertical from above,
Screw connection is also vertical from above.



Pluggable connection system PK-TS

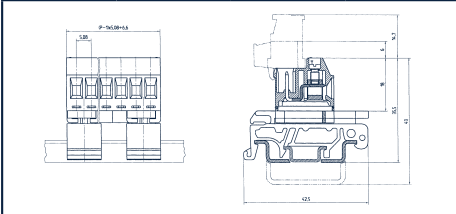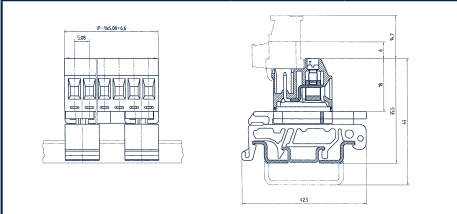
	PK-TS/... /5.08/15 TS15/TS35				PK-TS/... /5.08 TS32/TS35			
 5.08 mm								
								
Diagrams								
Wire connect type								
Dimensions								
Pitch, mm	5.08				5.08			
Stripping length, mm	6.00				6.00			
Drill hole diameter, mm								
Cross-section								
Solid (rigid) mm ²	0.20-4.00				0.20-4.00			
Finely stranded (flexible) mm ²	0.20-2.50				0.20-2.50			
Finely stranded (with wire-end ferrule) mm ²	0.25-2.50				0.25-2.50			
Ratings								
User group								
Rated voltage (V)	B	C	D	VDL*	B	C	D	VDL*
Rated current (A)	300	150	300	250	300	150	300	250
Overvoltage category	15	15	15	12	15	15	15	12
Max. cross-section, AWG/mm ²	III				III			
Rated surge voltage, kV	28-12	28-12	28-12	4.00	28-12	28-12	28-12	4.00
Torque, Nm / Screw size	1.60	1.60	1.60	0.5/M3	1.60	1.60	1.60	0.5/M3
Contamination degree	0.45 / M3	0.45 / M3	0.45 / M3	3	0.45 / M3	0.45 / M3	0.45 / M3	3
Material								
Insulation material / Flammability class	PA 6.6 / UL 94 V-0				PA 6.6 / UL 94 V-0			
Temperature range	-40 °C / +105 °C				-40 °C / +105 °C			
Clamping element	Brass				Brass			
Screw	Steel				Steel			
Contact pin	Copper alloy				Copper alloy			
Order information								
Standard colour(s)	No. of poles	Cat. no.	Qty.		No. of poles	Cat. no.	Qty.	
Other colours on request.		● (RAL 6018)				● (RAL 6018)		
	2	13175.1	50		2	12319.1	50	
	3	13176.1	50		3	12320.1	50	
	4	13177.1	50		4	12321.1	50	
	5	13178.1	50		5	12322.1	50	
	6	13179.1	50		6	12323.1	50	
	7	13180.1	50		7	12324.1	50	
	8	13181.1	50		8	12325.1	50	
	9	13182.1	50		9	12326.1	50	
	10	13183.1	50		10	12327.1	50	
	11	13184.1	25		11	12328.1	25	
	12	13185.1	25		12	12329.1	25	
	13	13186.1	25		13	12330.1	25	
	14	13187.1	25		14	12331.1	25	
	15	13188.1	25		15	12332.1	25	
	16	13189.1	25		16	12333.1	25	
	17	13190.1	25		17	12334.1	25	
	18	13191.1	25		18	12335.1	25	
	19	13192.1	25		19	12336.1	25	
	20	13193.1	25		20	12337.1	25	
	21	13194.1	25		21	12338.1	25	
	22	13195.1	25		22	12339.1	25	
	23	13196.1	25		23	12340.1	25	
	24	13197.1	20		24	12341.1	20	
Accessories								
Coding system								
Cat. no.	Qty.	K2 RD			Qty.	K2 RD		
12003.9	100	12003.9	100		12003.9	12003.9	100	
Labelling	Refer to page 186.				Refer to page 186.			
Matching counterparts	Refer to matrix on page 100-101				Refer to matrix on page 100-101			

* Approvals applied for




5.08 mm

PK-TS/... /5.08-F/15 TS15/TS35

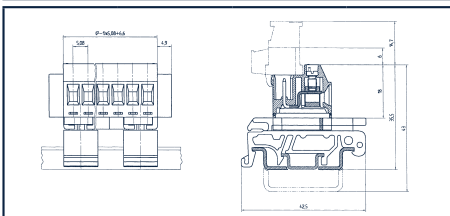

PK-TS/... /5.08-F TS32/TS35

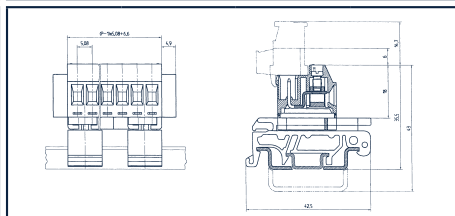

Diagrams

Wire connect type

Dimensions

Pitch, mm

5.08

Stripping length, mm

6.00

Drill hole diameter, mm

Cross-section

Solid (rigid) mm²

0.20-4.00

Finely stranded (flexible) mm²

0.20-2.50

Finely stranded (with wire-end ferrule) mm²

0.25-2.50

Ratings

User group

Rated voltage (V)

B 300

C 150

D 300

250

Rated current (A)

15

15

15

12

Overvoltage category

III

Max. cross-section, AWG/mm²

28-12

28-12

28-12

28-12

Rated surge voltage, kV

1.60

1.60

1.60

4.00

Torque, Nm / Screw size

0.45 / M3

0.45 / M3

0.45 / M3

0.5/M3

Contamination degree

3

Material

Insulation material / Flammability class

PA 6.6 / UL 94 V-0

Temperature range

-40 °C / +105 °C

Clamping element

Brass

Screw

Steel

Flange/threaded insert

Brass

Contact pin

Copper alloy

Order information

Standard colour(s)

No. of poles

Cat. no.

Qty.

Other colours on request.

2

● (RAL 6018)

50

3

13825.1

50

4

13826.1

50

5

13827.1

50

6

13828.1

50

7

13829.1

50

8

13830.1

50

9

13831.1

50

10

13832.1

50

11

13833.1

50

12

13834.1

25

13

13835.1

25

14

13836.1

25

15

13837.1

25

16

13838.1

25

17

13839.1

25

18

13840.1

25

19

13841.1

25

20

13842.1

25

21

13843.1

25

22

13844.1

25

23

13845.1

25

24

13846.1

25

25

13847.1

20

No. of poles

Cat. no.

Qty.

2

● (RAL 6018)

50

3

13848.1

50

4

13849.1

50

5

13850.1

50

6

13851.1

50

7

13852.1

50

8

13853.1

50

9

13854.1

50

10

13855.1

50

11

13856.1

50

12

13857.1

25

13

13858.1

25

14

13859.1

25

15

13860.1

25

16

13861.1

25

17

13862.1

25

18

13863.1

25

19

13864.1

25

20

13865.1

25

21

13866.1

25

22

13867.1

25

23

13868.1

25

24

13869.1

25

25

13870.1

20

Accessories

Coding system

Cat. no.

Qty.

Labelling

Matching counterparts

K2 RD

12003.9

100

Refer to page 186.

Refer to matrix on page 100-101

K2 RD

12003.9

100


Refer to page 186.

Refer to matrix on page 100-101

* Approvals applied for

Feed-through terminals SDK

CONTA-CLIP's **SDK** feed-through terminals provide a modular-based system for various device and housing applications. The option to combined coordinated system components enables various voltage levels up to 1000 V (UL 600 V) to be achieved. The insulated housing is made of polyamide 6.6 UL 94-V0. The pegs can be used to link the housings together to form multi-pole units. Optional flange plates are available for improved mechanical stability. The **PMC SB** or **PMC BSTR** tags can be used to label the feed-through terminals.

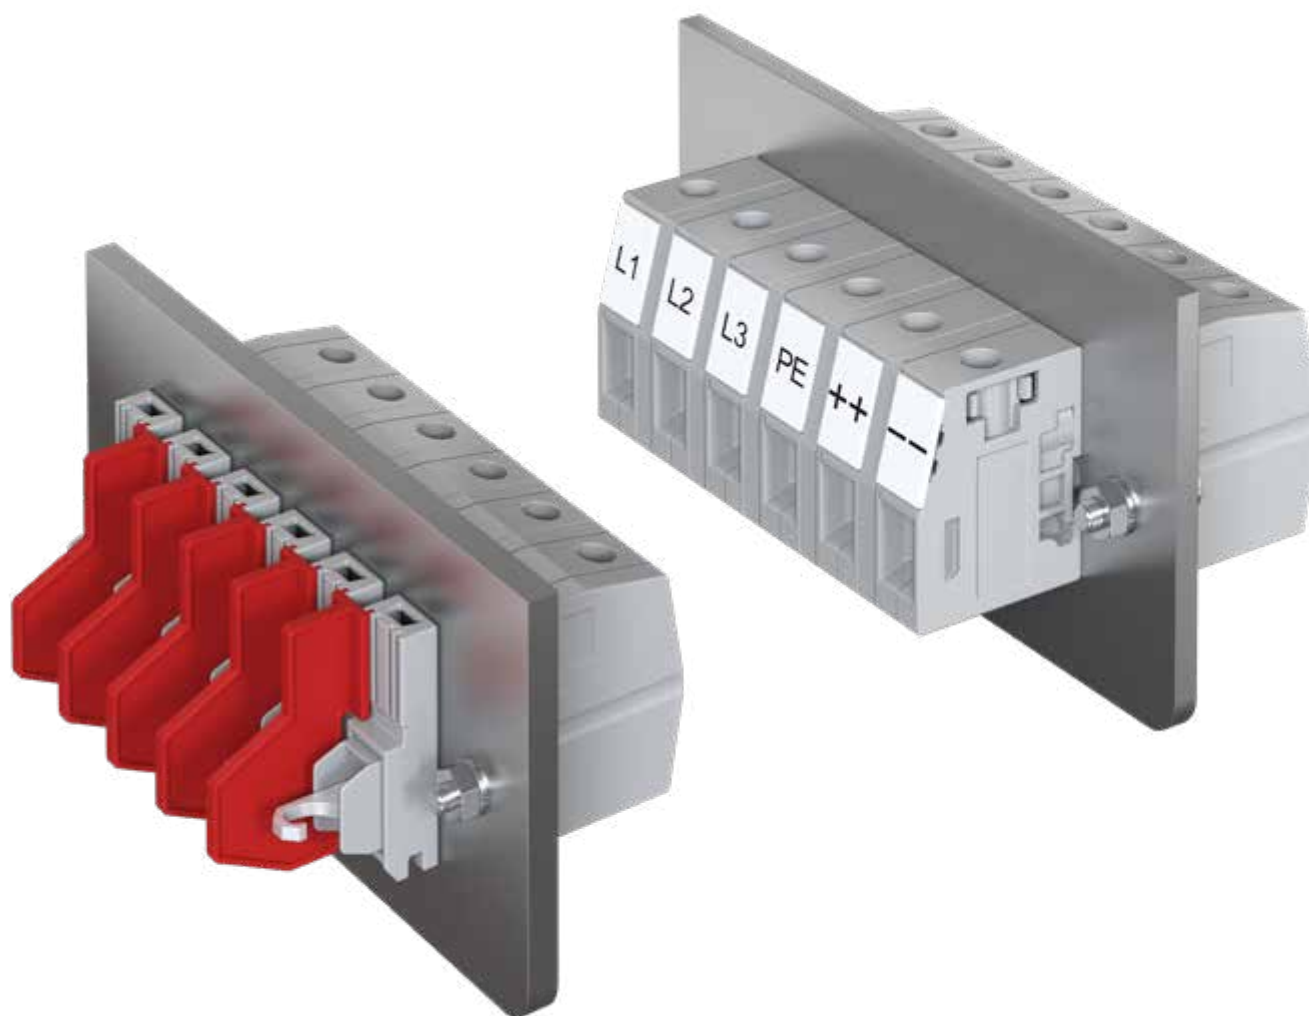

Your advantages

- Rated voltage: 1000V IEC/600V UL
- Versatile system with the optional usage of partition, spacer and adapter plates.
- Many possibilities to safely mount in the wall.
- Also available in customer-specific colours on request
- Simple and clear markings of the device connection



Features

- Screw-screw or screw-solder wire connection
- Wire cross-section up to 16 mm²
- Material: PA 6.6 UL 94 V-0
- Panel thickness up to 5 mm
- Simple installation

Custom colours

This complete product range is also available in customer-specific colours on request. The feed-through terminals come in grey as a default.



Practical marking options

The feed-through terminals feature a labelling channel that can be used to attach **PMC SB** and **PMC BSTR** tags.



High efficiency

The encapsulation of electrical components increases the heat dissipation and improves the electrical properties. The screw-solder variant of the **SDK** feed-through terminal is designed to meet the requirements for encapsulated devices. This variant provides the optimal seal for each application.



Secure attachment

The additional attachment options ensure maximum stability for use in applications with high mechanical stress loads.

Screw attachment is possible within the housing



Convenient side-by-side mounting

The housing pegs can be used to easily and quickly configure customized block variants.



Riveting is possible within the housing.



A comprehensive line of accessories

The optional use of partition, spacer and adapter plates – when using cross-sections ranging from 0.2 to 25 mm² and contamination degree 3 – enables you to achieve a rated voltage of 1000 V according to IEC or 600 V according to UL.



Housing flange (screw option) outside of the housing



Feed-through terminals SDK

Screw connection system

These rated specifications are achieved in accordance with IEC 60947-7-1 / UL-CSA without any additional accessories.

Ratings IEC 60947-7-1

Rated voltage (V), SDK 4/10/16	630
Rated current (A), SDK 4/10/16	32/57/76
Contamination degree	3
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6

Ratings UL / CSA

Rated voltage (V), SDK 4/10/16	300
Rated current (A), SDK 4/10/16	30/65/85
Use group	B, D
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6

SDK ../2A without accessories



Screw connection system

These rated specifications are achieved in accordance with IEC 60947-7-1 / UL-CSA when used with spacer plates.

Ratings IEC 60947-7-1

Rated voltage (V), SDK 4/10/16	800
Rated current (A), SDK 4/10/16	32/57/76
Contamination degree	3
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6

Ratings UL / CSA

Rated voltage (V), SDK 4/10/16	600
Rated current (A), SDK 4/10/16	5/5/5
Use group	D
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6

Ratings UL / CSA

Rated voltage (V), SDK 4/10/16	300
Rated current (A), SDK 4/10/16	30/65/85
Use group	C
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6

SDK ../2A with spacer plates



Screw connection system

These rated specifications are achieved in accordance with IEC 60947-7-1 / UL-CSA when used with spacer plates and adapter plates.

Ratings IEC 60947-7-1

Rated voltage (V), SDK 4/10/16	1000
Rated current (A), SDK 4/10/16	32/57/76
Contamination degree	3
Panel thickness mm, SDK 4/10/16	1-3/1-3/1-5

Ratings UL / CSA

Rated voltage (V), SDK 4/10/16	600
Rated current (A), SDK 4/10/16	30/65/65
Use group	C
Panel thickness mm, SDK 4/10/16	1-3/1-3/1-5

SDK ../2A with spacer and adapter plates



Screw/solder wire connection system

These rated specifications are achieved in accordance with IEC 60947-7-1 / UL-CSA without any additional accessories or encapsulation compound.

Ratings IEC 60947-7-1	
Rated voltage (V), SDK 4/10/16	250/320/400
Rated current (A), SDK 4/10/16	32/57/76
Contamination degree	3
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6
Ratings UL / CSA	
Rated voltage (V), SDK 4/10/16	300
Rated current (A), SDK 4/10/16	30/65/85
Use group	B
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6
Ratings UL / CSA	
Rated voltage (V), SDK 4/10/16	300
Rated current (A), SDK 4/10/16	10/10/10
Use group	D
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6

SDK .../1A/1L (1B) without accessories




Screw/solder wire connection system


These rated specifications are achieved in accordance with IEC 60947-7-1 / UL-CSA when used with the inner partition plates or with the encapsulation compound without the partitions.

Ratings IEC 60947-7-1	
Rated voltage (V), SDK 4/10/16	1000
Rated current (A), SDK 4/10/16	32/57/76
Contamination degree	3
Panel thickness mm, SDK 4/10/16	1-3/1-3/1-5
Ratings UL / CSA	
Rated voltage (V), SDK 4/10/16	600
Rated current (A), SDK 4/10/16	30/65/65
Use group	C
Panel thickness mm, SDK 4/10/16	1-3/1-3/1-5

SDK ../1A/1L (1B) with partition plate inside

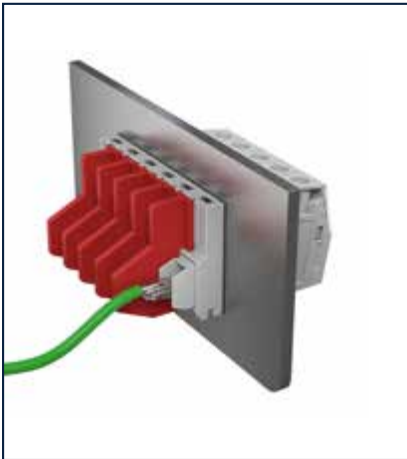

SDK ../1A/1L (1B) with encapsulation compound

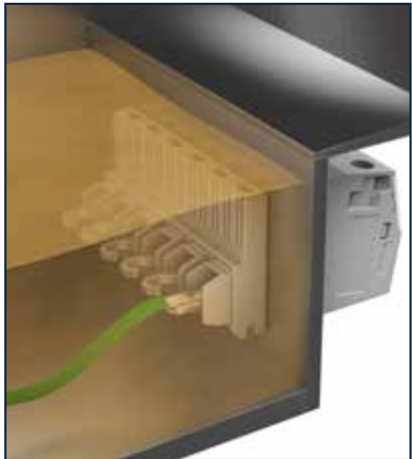


Screw/solder wire connection system


These rated specifications are achieved in accordance with IEC 60947-7-1 / UL-CSA when used with partition plates and the spacer plate or when used with encapsulation compound and the spacer plate.

Ratings IEC 60947-7-1	
Rated voltage (V), SDK 4/10/16	1000
Rated current (A), SDK 4/10/16	32/57/76
Contamination degree	3
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6
Ratings UL / CSA	
Rated voltage (V), SDK 4/10/16	600
Rated current (A), SDK 4/10/16	30/65/85
Use group	C
Panel thickness mm, SDK 4/10/16	1-4/1-4/1-6

SDK ../1A/1L (1B) with partition plates inside and spacer plates

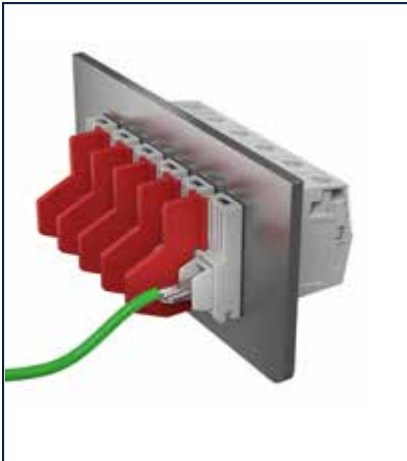

SDK ../1A/1L (1B) with encapsulation compound and spacer plates

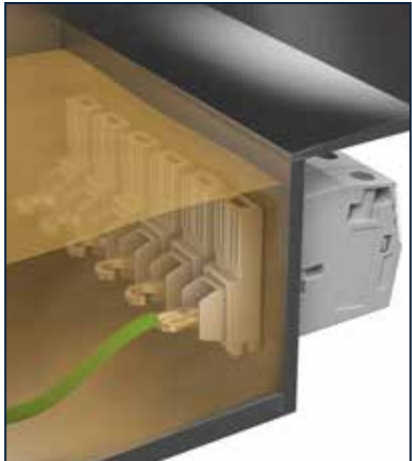

Feed-through terminals SDK 4

Screw connection system





- Housing made of polyamide 6.6 UL 94 V-0

SDK 4/2A



Diagrams

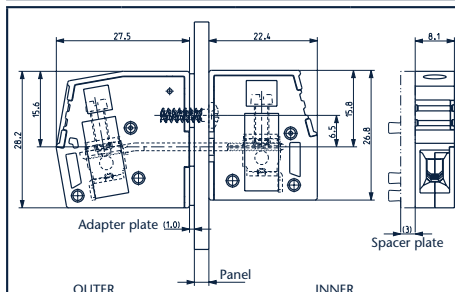

Wire connect type

Size (L x W x H), mm: outer part

Size (L x W x H), mm: inner part

Type / colour

Cat. no. Qty.

Type / colour

Cat. no. Qty.

Ratings IEC 60947-7-1

Rated voltage (V)

Rated current (A) / Max. current capacity (A)

Rated cross-section, mm²

Contamination degree

Thickness of panel, mm

Rated surge voltage, kV

Plug gauge acc. to EN 60 947-1 / Flamm. class acc. to UL 94

Screw connection technology

27.5 x 8.1 x 28.2

22.4 x 8.1 x 26.8

SDK 4/2A GR ●

17380.6 50

SDK 4/2A/Z GR ●

17381.6 50

630 800* 1000**

32/41 32/41 32/41


4 4 4

3 3 3

1-4 1-4 1-3**

6 6 6

A4/V-0 A4/V-0 A4/V-0



Ratings UL / CSA

Rated voltage (V)

Rated current (A)

Rated cross-section, AWG

Use group

Thickness of panel, mm

300 300* 600* 600**

30/10 30 5 30

26-10 26-10 26-10 26-10

B/D C D C

1-4 1-4 1-4 1-3**

0.2-6 / -

0.2-6/0.2-4

0.2-6

10

0.5 - 1 | Slotted M3

PA 6.6 / UL 94 V-0

-40 °C / +120 °C

Inner part, outer part and mounting screw inside

SDK 4-DP GR

17431.6 50

SDK 4-FP GR (use M3 x 8 screws)

17432.6 50

SDK 4-AP/6 GR

17433.6 10

BS-SDK 4 3 x 10

17438.6 100

SDB 0.6 x 3.5

1086.0 1

PMC BSTR 8 x 12/21 WH

9410.7 210

Set: spacer plate inside + outside

Cat. no. Qty.

Set: outer flange plate

Cat. no. Qty.

Outer 6-pole adapter plate

Cat. no. Qty.

Outer spacer plate

Cat. no. Qty.

Inner partition plate, solder connection

Cat. no. Qty.

Perforated foam seal

Cat. no. Qty.

Inner moulded plate

Cat. no. Qty.

Inner mounting screw

Cat. no. Qty.

Screwdriver SDB

Cat. no. Qty.

Quick marking PMC SB

Cat. no. Qty.

* * When using spacer plates and mounting on a conductive housing panel



** * When using spacer plates and adapter plates, and when mounting on a conductive housing panel

Screw-on / solder wire connection system



- Housing made of polyamide 6.6 UL 94 V-0

Diagrams

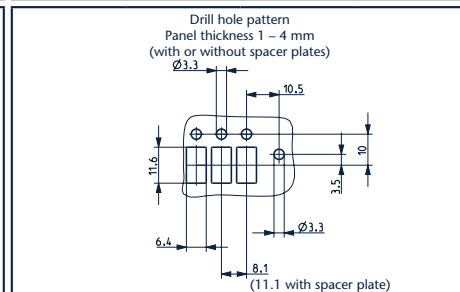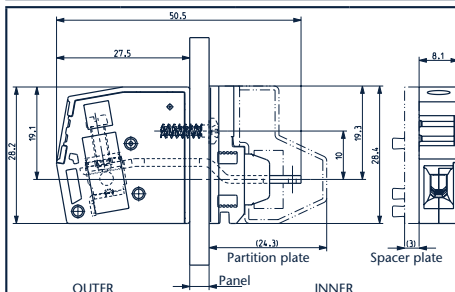

Wire connect type		Screw-solder		
Size (L x W x H), mm: outer part		27.5 x 8.1 x 28.2		
Size (L x W x H), mm: inner part		7.3 x 8.1 x 28.4		
Type / colour		SDK 4/1A/1L GR 		
Cat. no.	Qty.	17382.6		50
Type / colour		SDK 4/1A/1L/Z GR 		
Cat. no.	Qty.	17383.6		50
Ratings IEC 60947-7-1				
Rated voltage (V)		250*	630**	1000***
Rated current (A) Max. current capacity (A)		32/41	32/41	32/41
Rated cross-section, mm²		4	4	4
Contamination degree		3	3	3
Thickness of panel, mm		1-4	1-4	1-4
Rated surge voltage, kV		6	6	6
Plug gauge acc. to EN 60 947-1 / Flamm. class acc. to UL 94		A4/V-0	A4/V-0	A4/V-0
Ratings UL / CSA				
Rated voltage (V)		300*	600**	600***
Rated current (A)		30/10	5	30
Rated cross-section, AWG		26-10	26-10	26-10
Use group		B/D	C	D
Thickness of panel, mm		1-4	1-4	1-4
Connection data				
Single wire (solid) / stranded (flexible), mm²		0.2-6 / -		
Finely-stranded / Finely-stranded (w/ferrules: DIN 46 228/1), mm²		0.2-4/0.2-4		
Clamping area, mm²		0.2-6		
Stripping length, mm		10		
Torque, Nm / Screw		0.5 – 1 Slotted M3		
Features				
Insulation material / Flammability class		PA 6.6 / UL 94 V-0		
Temperature range		-40 °C / +120 °C		
Included in delivery				
		Inner part, outer part, mounting screw inside and foam seal		
Accessories				
Set: spacer plate inside + outside				
Cat. no.	Qty.			
Set: outer flange plate		SDK 4-FP GR (use M3 x 8 screws)		
Cat. no.	Qty.	17432.6		50
Outer 6-pole adapter plate				
Cat. no.	Qty.			
Outer spacer plate		SDK 4-DPA GR		
Cat. no.	Qty.	17434.6		50
Inner partition plate, solder connection		SDK 4-TWI RD		
Cat. no.	Qty.	17435.9		50
Perforated foam seal		SDK 4-SPI/10 DG		
Cat. no.	Qty.	17436.4		100
Inner moulded plate		SDK 4-VPI GR		
Cat. no.	Qty.	17437.6		50
Inner mounting screw		BS-SDK 4 3 x 10		
Cat. no.	Qty.	17438.6		100
Screwdriver SDB		SDB 0.6 x 3.5		
Cat. no.	Qty.	1086.0		1
Quick marking PMC SB		PMC BSTR 8 x 12/21 WH		
Cat. no.	Qty.	9410.7		210

* Without spacer plate, without encapsulation compound or without partition plate

** When used without outer spacer plates, and when mounted on a conductive housing panel with use of encapsulation compound or inner partition plate

***When used with outer spacer plates, and when mounted on a conductive housing panel with use of encapsulation compound or inner partition plates

Feed-through terminals SDK 10

Screw connection system





- Housing made of polyamide 6.6 UL 94 V-0

SDK 10/2A



Diagrams

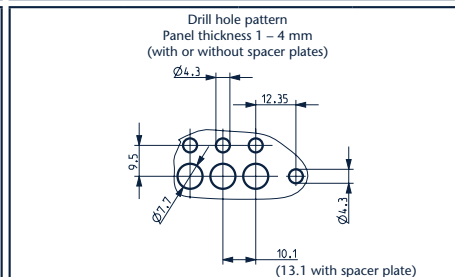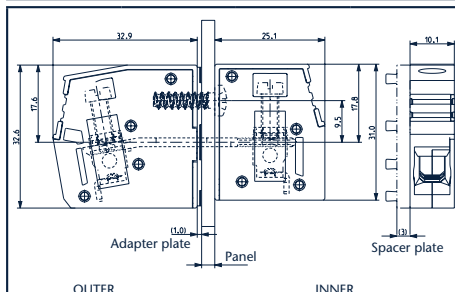

Wire connect type

Size (L x W x H), mm: outer part

Size (L x W x H), mm: inner part

Type / colour

Cat. no. Qty.

Type / colour

Cat. no. Qty.

Ratings IEC 60947-7-1

Rated voltage (V)

Rated current (A) | Max. current capacity (A)

Rated cross-section, mm²

Contamination degree

Thickness of panel, mm

Rated surge voltage, kV

Plug gauge acc. to EN 60 947-1 / Flamm. class acc. to UL 94

Screw connection technology

32.9 x 10.1 x 32.6

25.1 x 10.1 x 31.0

SDK 10/2A GR ●

17386.6 50

SDK 10/2A/Z GR ●

17387.6 50

630 800* 1000**

57/76 57/76 57/76


10 10 10

3 3 3

1-4 1-4 1-3**

6 6 6

A6/V-0 A6/V-0 A6/V-0

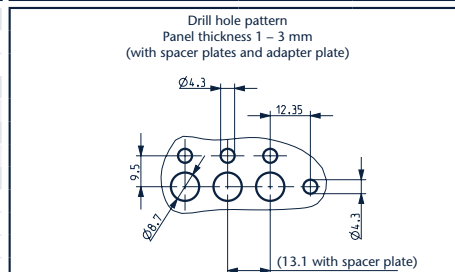

Ratings UL / CSA

Rated voltage (V)

Rated current (A)

Rated cross-section, AWG

Use group

Thickness of panel, mm

300 300* 600* 600**

65/10 65 5 65

20-6 20-6 20-6 20-6

B/D C D C

1-4 1-4 1-4 1-3**

0.2-16 / 0.2-16

0.2-16 / 0.2-10

0.2-16

12

1.2-2.4 / Slotted M4

PA 6.6 / UL 94 V-0

-40 °C / +120 °C

Inner part, outer part and mounting screw inside

SDK 10-DP GR

17441.6 50

SDK 10-FP GR (use M4 x 10 screws)

17442.6 50

SDK 10-AP/6 GR

17443.6 10

BS-SDK 10/16

17448.6 100

SDB 0.8 x 4.0

1087.0 1

PMC BSTR 10 x 12/10 WH

9433.7 100

17441.6

17442.6

17443.6

17448.6

1087.0

9433.7

17441.6

17442.6

17443.6

17448.6

1087.0

9433.7

17441.6

17442.6

17443.6

17448.6

1087.0

9433.7

* * When using spacer plates and mounting on a conductive housing panel

** * When using spacer plates and adapter plates, and when mounting on a conductive housing panel

Feed-through terminals SDK 16

Screw connection system





- Housing made of polyamide 6.6 UL 94 V-0

SDK 16/2A



Diagrams

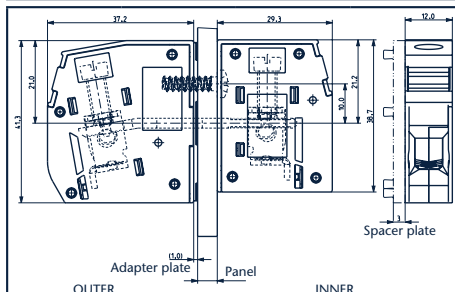

Wire connect type

Size (L x W x H), mm: outer part

Size (L x W x H), mm: inner part

Type / colour

Cat. no. Qty.

Type / colour (with housing pegs)

Cat. no. Qty.

Ratings IEC 60947-7-1

Rated voltage (V)

Rated current (A) | Max. current capacity (A)

Rated cross-section, mm²

Contamination degree

Thickness of panel, mm

Rated surge voltage, kV

Plug gauge acc. to EN 60 947-1 / Flamm. class acc. to UL 94

Screw connection technology

37.2 x 12.0 x 41.3

29.3 x 12.0 x 38.7

SDK 16/2A GR ●

17394.6

50

SDK 16/2A/Z GR ●

17398.6

50

630

800*

1000**

76/101

76/101

76/101

16

16

16

3

3

3

1-6

1-6

1-5**

6

6

6

A7/V-0

A7/V-0

A7/V-0

Ratings UL / CSA

Rated voltage (V)

Rated current (A)

Rated cross-section, AWG

Use group

Thickness of panel, mm

300

300*

600*

600**

85/10

85

5

85

16-4

16-4

16-4

16-4

B/D

C

D

C

1-6

1-6

1-6

1-5**

Connection data

Single wire (solid) / stranded (flexible), mm²Finely-stranded / Finely-stranded (w/ferrules: DIN 46 228/1), mm²Clamping area, mm²

Stripping length, mm

Torque, Nm / Screw

1.5-25 / 1.5-25

1.5-25/1.5-16

1.5-25

16

2.0-4.0 / Slotted M5

Features

Insulation material / Flammability class

Temperature range

PA 6.6 / UL 94 V-0

-40 °C / +120 °C

Included in delivery

Inner part, outer part and mounting screw inside

Accessories

Set: spacer plate inside + outside

Cat. no. Qty.

SDK 16-DP GR

17451.6

50

Set: outer flange plate

Cat. no. Qty.

SDK 16-FP GR (use M4 x 16 screws)

17452.6

50

Outer 6-pole adapter plate

Cat. no. Qty.

SDK 16-AP/6 GR

17453.6

10

Outer spacer plate

Cat. no. Qty.

Inner partition plate, solder connection

Cat. no. Qty.

Perforated foam seal

Cat. no. Qty.

Inner moulded plate

Cat. no. Qty.

Inner mounting screw

Cat. no. Qty.

BS-SDK 10/16

17448.6

100

Screwdriver SDB

Cat. no. Qty.

SDB 0.8 x 4.0

1087.0

1

Quick marking PMC SB

Cat. no. Qty.

PMC BSTR 10 x 12/10 WH

9433.7

100

* * When using spacer plates and mounting on a conductive housing panel

** * When using spacer plates and adapter plates, and when mounting on a conductive housing panel

Screw- / stud connection





- Housing made of polyamide 6.6 UL 94 V-0

SDK 16/1A/1B



Diagrams

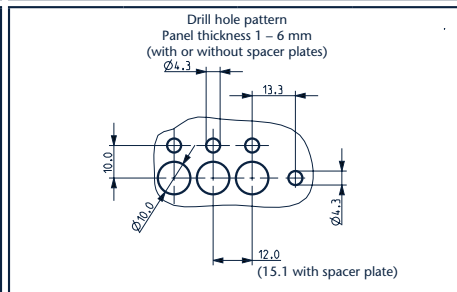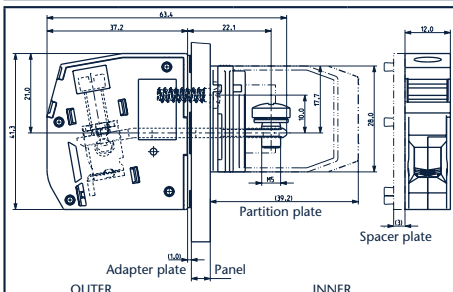

Wire connect type

Size (L x W x H), mm: outer part

Size (L x W x H), mm: inner part

Type / colour

Cat. no.

Qty.

Type / colour

Cat. no.

Qty.

Ratings IEC 60947-7-1

Rated voltage (V)

Rated current (A) | Max. current capacity (A)

Rated cross-section, mm²

Contamination degree

Thickness of panel, mm

Rated surge voltage, kV

Plug gauge acc. to EN 60 947-1 / Flamm. class acc. to UL 94

Screw - stud

37.2 x 12.0 x 41.3

9.3 x 12.0 x 28.0

SDK 16/1A/1B GR ●

17396.6

50

SDK 16/1A/1B/Z GR ●

17397.6

50

400*

630**

1000***

76/101

76/101

76/101

16

16

16

3

3

3

1-6

1-6

1-5***

4

6

6

A7/V-0

A7/V-0

A7/V-0

Ratings UL / CSA

Rated voltage (V)

Rated current (A)

Rated cross-section, AWG

Use group

Thickness of panel, mm

300*

600**

600***

85/10

5

85

16-4

16-4

16-4

B/D

D

C

1-6

1-6

1-5***

Connection data

Single wire (solid) / stranded (flexible), mm²Finely-stranded / Finely-stranded (w/ferrules: DIN 46 228/1), mm²Clamping area, mm²

Stripping length, mm

Tightening torque Nm / Screw outer part

Tightening torque Nm / Screw inner part

1.5-25 / 1.5-25

1.5-25/1.5-16

1.5-25

16

2.0-4.0 / Slotted M5

2.5-3.0/cross-head M5

Features

Insulation material / Flammability class

Temperature range

Included in delivery

PA 6.6 / UL 94 V-0

-40 °C / +120 °C

Inner part, outer part and mounting screw inside

Accessories

Set: spacer plate inside + outside

Cat. no.

Qty.

Set: outer flange plate

Cat. no.

Qty.

Outer 6-pole adapter plate

Cat. no.

Qty.

Outer spacer plate

Cat. no.

Qty.

Inner partition plate, solder connection

Cat. no.

Qty.

Perforated foam seal

Cat. no.

Qty.

Inner moulded plate

Cat. no.

Qty.

Inner mounting screw

Cat. no.

Qty.

Screwdriver SDB

Cat. no.

Qty.

Quick marking PMC SB

Cat. no.

Qty.

SDK 16-FP GR (use M4 x 16 screws)

17452.6

50

SDK 16-AP/6 GR

17453.6

10

SDK 16-DPA GR

17454.6

50

SDK 16-TWI RD

17455.9

50

SDK 16-SPI/10 DG

17456.4

100

SDK 16-VPI GR

17457.6

50

BS-SDK 10/16

17448.6

100

SDB 0.8 x 4.0

1087.0

1

PMC BSTR 10 x 12/10 WH

9433.7

100

* Without spacer plate, without encapsulation compound or without partition plate

** When used without outer spacer plates, and when mounted on a conductive housing panel with use of encapsulation compound or inner partition plate


***When used with outer spacer plates, and when mounted on a conductive housing panel with use of encapsulation compound or inner partition plates

CONTA-CON Accessories

A large selection of accessories completes our line of PCB connector products to provide the best wire-connection-system for your applications.

Find out more about these:

- Coding system **K**
- Single cover **AD/PK**
- Dummy plug **BLS-STL**
- Labelling and marking **BK/SB**
- Rail mounting system **RS-SP** (extruded profiles)

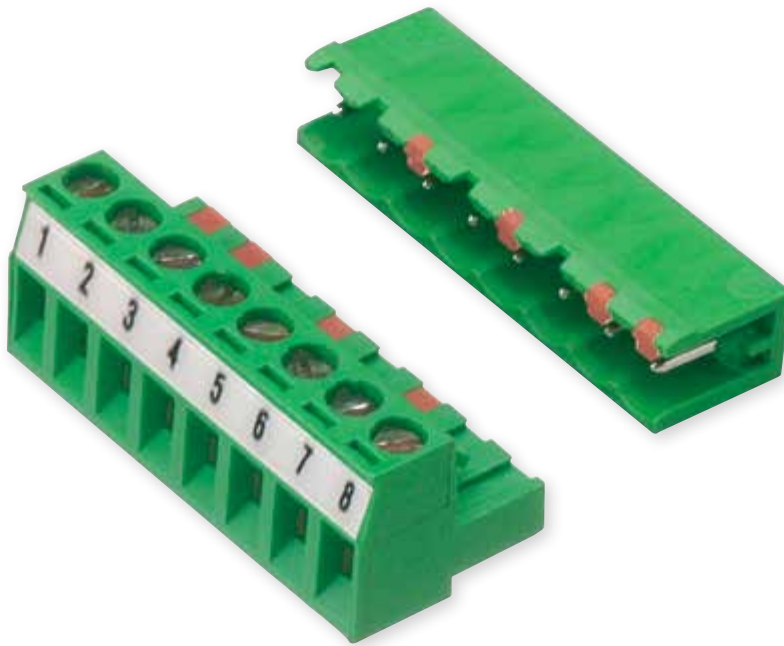

Coding system K

With the coding system **K**, users can code our PCB connectors without loss of poles in order to reliably prevent incorrect mating.


The coding elements are attached to star-shaped carrier plates. The mechanical coding is done by inserting the individual coding profiles into the mating face.



Cover AD/ PK


Multiple VDE regulations require that power supply terminals must be covered in addition to their IP20 protection. The **AD/ PK** single cover is available for the **PK 7** PCB terminal block and the PCB plug-in connector.

The screw cover is used to cover the screws after the wire has been attached.

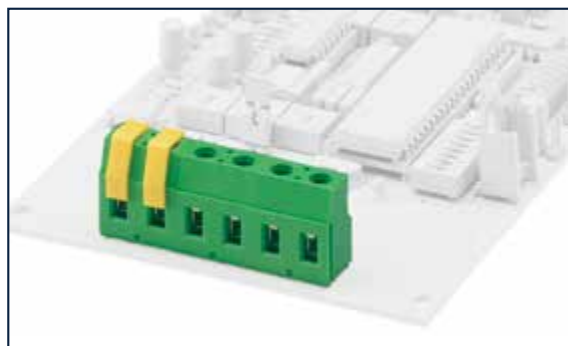

Dummy/partition plugs BLS-STL


By plugging the **BLS-STL** into a longer male pin block, it can be divided into different sections. This also makes it possible to clearly divide longer male pin blocks. The dummy plugs additionally protect the male pin block from dust and touch contact.

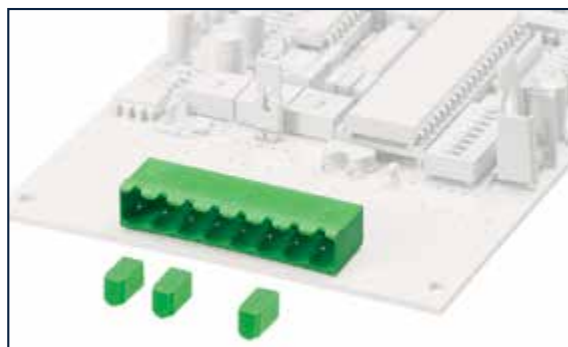

Labelling BK


Our PCB terminals and plug-in connectors are delivered by default without any labelling of the poles.

All CONTA-CON terminals can be printed according to customer requirements for an extra charge. We also provide printed or blank self-adhesive **BK** labelling cards.

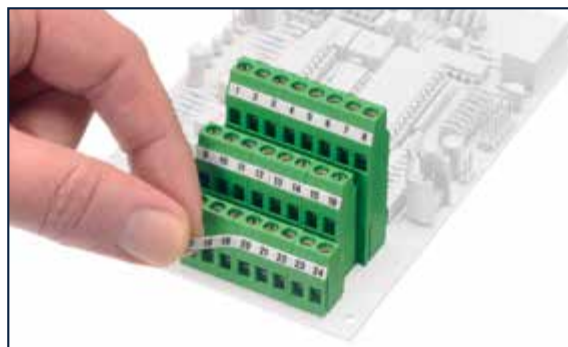


Locking-base system RS-SP

The **RS-SP 0**, **RS-SP 1** and the **RS-SP 2** profiles have two PCB levels and are delivered in two-meter lengths. They can be shortened with a saw to the correct length. Naturally, we will also deliver the profiles according to your requirements. The profile can be shortened freely, without rigid pitch divisions. The individual fit of the enclosure profile to the electronics is thus guaranteed.

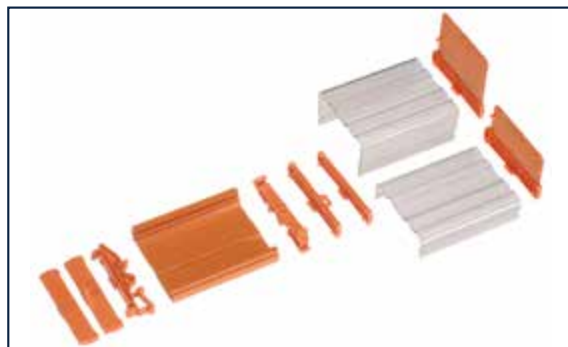

Coding system K

	K 1			K 2		
						
Characteristics						
Insulation material / Flammability class	PA 6.6 / UL 94 V-0			PA 6.6 / UL 94 V-0		
Temperature range	-40 °C / +105 °C			-40 °C / +105 °C		
Number of tabs per star	6			6		
Order information	Type	Cat. no.	Qty.	No. of poles	Cat. no.	Qty.
Standard colour(s)	K1 RD	12002.9	100	K2 RD	12003.9	100

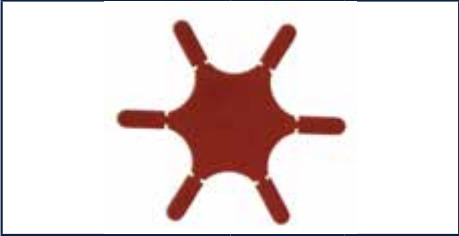	K 3			K 4		
						
Characteristics						
Insulation material / Flammability class	PA 6.6 / UL 94 V-0			PA 6.6 / UL 94 V-0		
Temperature range	-40 °C / +105 °C			-40 °C / +105 °C		
Number of tabs per star	6			6		
Order information	Type	Cat. no.	Qty.	No. of poles	Cat. no.	Qty.
Standard colour(s)	K3 RD	12004.9	100	K4 RD	14309.4	100

	K5		
			
Characteristics			
Insulation material / Flammability class	PA 6.6 / UL 94 V-0		
Temperature range	-40 °C / +105 °C		
Number of tabs per star	6		
Order information	Type	Cat. no.	Qty.
Standard colour(s)	K5 RD	14310.4	100

Cover AD/PK

		AD						
								
Characteristics								
Insulation material / Flammability class		PA 6.6 / UL 94 V-0						
Temperature range		-40 °C / +105 °C						
Order information								
Standard colour(s)		<table><tr><th>Type</th><th>Cat. no.</th><th>Qty.</th></tr><tr><td>AD/PK yellow</td><td>13283.8</td><td>100</td></tr></table>	Type	Cat. no.	Qty.	AD/PK yellow	13283.8	100
Type	Cat. no.	Qty.						
AD/PK yellow	13283.8	100						

Dummy/partition plug BLS-STL

	BLS-STL			BLS-STL2		
						
Characteristics						
Insulation material / Flammability class	PA 6.6 / UL 94 V-0			PA 6.6 / UL 94 V-0		
Temperature range	-40 °C / +105 °C			-40 °C / +105 °C		
Order information	Type	Cat. no.	Qty.	No. of poles	Cat. no.	Qty.
Standard colour(s)	BLS-STL	13284.1	100	BLS-STL2	30499.1	100

Labelling

Strip height: 2.8 mm, 3.3 mm or 3.8 mm

Our PCB terminals and plug-in connectors are delivered by default without any labelling of the poles.

All CONTA-CON terminals can be printed according to customer requirements for an extra charge.

We also provide printed or blank self-adhesive **BK** labelling cards.

These individual labelling strips can be attached to all PCB terminal blocks and plug-in connectors that do not have a marker groove (exception listed below). The strips are available in the heights 2.8 mm, 3.3 mm and 3.8 mm. Depending on the version, either 12 or 14 labelling strips with 10 or 12 marking labels each are combined together on a **BK** labelling card.


The cards are available in the following CONTA-CON PCB connector pitches: 2.50, 2.54, 3.50, 3.81, 5.00, 5.08, 7.50, 7.62. In these pitch dimensions, the labelling cards are available with standard labelling from 0 to 40 (continual horizontal).

Unprinted 10-pole cards with pitch marks are available for custom labelling. These can be marked manually using the **BS-1** labelling pen. Machine-made, customized labelling cards are available on request.

Exception:

For the **PK 2.5**, **PKDL 2.5** and **PKDR 2.5** PCB terminals, there is a groove in the insulation housing into which a labelling tag can be snapped.


For a more detailed product description of the marking system, please refer to our sub-catalogue 6 "Marking components for ink-based marking systems".

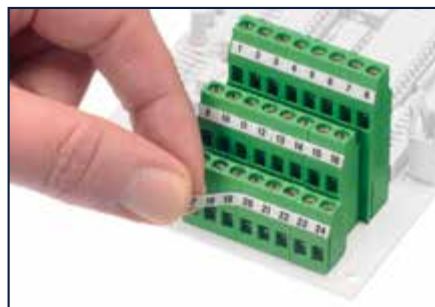

Example of BK labelling




**Application of
Pocket-Maxicard PMC SB**

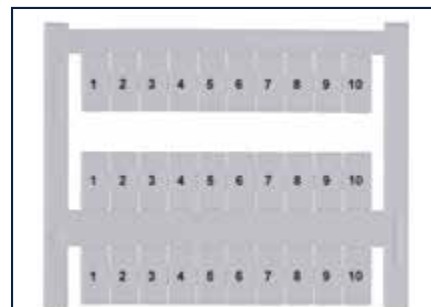

**Terminal marking system
Pocket Maxicard PMC**

Labelling card BK

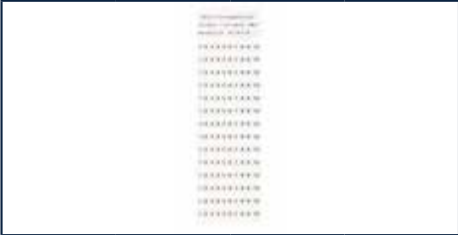
	BKA 2.5/2.8	BKA 2.54/2.8
		
Characteristics		
Material / colour	Polyester / white	Polyester / white
Temperature range	-40 °C / +120 °C	-40 °C / +120 °C
Pitch / Tag height	2.50 / 2.8 mm	2.54 / 2.8 mm
Number of tags per row / sheet	10 / 140	10 / 140
Printing process	Thermal transfer	Thermal transfer
Wipe resistance when printing	DIN EN 61010-1 (VDE 0411-1)	DIN EN 61010-1 (VDE 0411-1)
Order information		
Unprinted, freely divided pitch	Type BK 2.50/2.8 blank BK 2.50/2.8 So BK 2.50/2.8 FW 0-9 BK 2.50/2.8 FW 1-10 BK 2.50/2.8 FW 11-20 BK 2.50/2.8 FW 21-30 BK 2.50/2.8 FW 31-40	Type BK 2.54/2.8 blank BK 2.54/2.8 So BK 2.54/2.8 FW 0-9 BK 2.54/2.8 FW 1-10 BK 2.54/2.8 FW 11-20 BK 2.54/2.8 FW 21-30 BK 2.54/2.8 FW 31-40
Special print	Cat. no. 3171.0 3180.0 2979.0 2980.0 2981.0 2982.0 2983.0	Cat. no. 3172.0 3181.0 2984.0 2985.0 2986.0 2987.0 2988.0
Card, printed, continual, horizontal:	Qty. 10 10 10 10 10 10 10	Qty. 10 10 10 10 10 10 10

	BKA 3.5/2.8	BKA 3.81/2.8
		
Characteristics		
Material / colour	Polyester / white	Polyester / white
Temperature range	-40 °C / +120 °C	-40 °C / +120 °C
Pitch / Tag height	3.50 / 2.8 mm	3.81 / 2.8 mm
Number of tags per row / sheet	10 / 140	10 / 140
Printing process	Thermal transfer	Thermal transfer
Wipe resistance when printing	DIN EN 61010-1 (VDE 0411-1)	DIN EN 61010-1 (VDE 0411-1)
Order information		
Unprinted, freely divided pitch	Type BK 3.50/2.8 neutral BK 3.50/2.8 So BK 3.50/2.8 FW 0-9 BK 3.50/2.8 FW 1-10 BK 3.50/2.8 FW 11-20 BK 3.50/2.8 FW 21-30 BK 3.50/2.8 FW 31-40	Type BK 3.81/2.8 neutral BK 3.81/2.8 So BK 3.81/2.8 FW 0-9 BK 3.81/2.8 FW 1-10 BK 3.81/2.8 FW 11-20 BK 3.81/2.8 FW 21-30 BK 3.81/2.8 FW 31-40
Special print	Cat. no. 3173.0 3182.0 3015.0 3016.0 3017.0 3018.0 3019.0	Cat. no. 3174.0 3183.0 3032.0 3033.0 3034.0 3035.0 3036.0
Card, printed, continual, horizontal:	Qty. 10 10 10 10 10 10 10	Qty. 10 10 10 10 10 10 10

Labelling card BK

	BAK 5.08/2.8	BAK 5.08/2.8																					
Characteristics																							
Material / colour	Polyester / white	Polyester / white																					
Temperature range	-40 °C / +120 °C	-40 °C / +120 °C																					
Pitch / Tag height	5.08 / 2.8 mm	5.08 / 2.8 mm																					
Number of tags per row / sheet	10 / 140	12 / 168																					
Printing process	Thermal transfer	Thermal transfer																					
Wipe resistance when printing	DIN EN 61010-1 (VDE 0411-1)	DIN EN 61010-1 (VDE 0411-1)																					
Order information																							
Unprinted, freely divided pitch	<table><tr><th>Type</th><th>Cat. no.</th><th>Qty.</th></tr><tr><td>BK 5.08/2.8 neutral</td><td>3175.0</td><td>10</td></tr></table>	Type	Cat. no.	Qty.	BK 5.08/2.8 neutral	3175.0	10	<table><tr><th>Type</th><th>Cat. no.</th><th>Qty.</th></tr><tr><td>BK 5.08/2.8 FW 1-12</td><td>2960.7</td><td>10</td></tr></table>	Type	Cat. no.	Qty.	BK 5.08/2.8 FW 1-12	2960.7	10									
Type	Cat. no.	Qty.																					
BK 5.08/2.8 neutral	3175.0	10																					
Type	Cat. no.	Qty.																					
BK 5.08/2.8 FW 1-12	2960.7	10																					
Special print	<table><tr><td>BK 5.08/2.8 So</td><td>3184.0</td><td>10</td></tr><tr><td>BK 5.08/2.8 FW 0-9</td><td>3136.0</td><td>10</td></tr><tr><td>BK 5.08/2.8 FW 1-10</td><td>3137.0</td><td>10</td></tr><tr><td>BK 5.08/2.8 FW 11-20</td><td>3138.0</td><td>10</td></tr><tr><td>BK 5.08/2.8 FW 21-30</td><td>3139.0</td><td>10</td></tr><tr><td>BK 5.08/2.8 FW 31-40</td><td>3140.0</td><td>10</td></tr></table>	BK 5.08/2.8 So	3184.0	10	BK 5.08/2.8 FW 0-9	3136.0	10	BK 5.08/2.8 FW 1-10	3137.0	10	BK 5.08/2.8 FW 11-20	3138.0	10	BK 5.08/2.8 FW 21-30	3139.0	10	BK 5.08/2.8 FW 31-40	3140.0	10	<table><tr><td>BK 5.08/2.8 FW 13-24</td><td>2961.7</td><td>10</td></tr></table>	BK 5.08/2.8 FW 13-24	2961.7	10
BK 5.08/2.8 So	3184.0	10																					
BK 5.08/2.8 FW 0-9	3136.0	10																					
BK 5.08/2.8 FW 1-10	3137.0	10																					
BK 5.08/2.8 FW 11-20	3138.0	10																					
BK 5.08/2.8 FW 21-30	3139.0	10																					
BK 5.08/2.8 FW 31-40	3140.0	10																					
BK 5.08/2.8 FW 13-24	2961.7	10																					
Card, printed, continual, horizontal:																							

	BAK 5.00/3.8	BAK 5.08/3.8																																				
Characteristics																																						
Material / colour	Polyester / white	Polyester / white																																				
Temperature range	-40 °C / +120 °C	-40 °C / +120 °C																																				
Pitch / Tag height	5.00 / 3.8 mm	5.08 / 3.8 mm																																				
Number of tags per row / sheet	10 / 120	10 / 120																																				
Printing process	Thermal transfer	Thermal transfer																																				
Wipe resistance when printing	DIN EN 61010-1 (VDE 0411-1)	DIN EN 61010-1 (VDE 0411-1)																																				
Order information																																						
Unprinted, freely divided pitch	<table><tr><th>Type</th><th>Cat. no.</th><th>Qty.</th></tr><tr><td>BK 5.00/3.8 neutral</td><td>3176.0</td><td>10</td></tr></table>	Type	Cat. no.	Qty.	BK 5.00/3.8 neutral	3176.0	10	<table><tr><th>Type</th><th>Cat. no.</th><th>Qty.</th></tr><tr><td>BK 5.08/3.8 neutral</td><td>3177.0</td><td>10</td></tr></table>	Type	Cat. no.	Qty.	BK 5.08/3.8 neutral	3177.0	10																								
Type	Cat. no.	Qty.																																				
BK 5.00/3.8 neutral	3176.0	10																																				
Type	Cat. no.	Qty.																																				
BK 5.08/3.8 neutral	3177.0	10																																				
Special print	<table><tr><td>BK 5.00/3.8 So</td><td>3185.0</td><td>10</td></tr><tr><td>BK 5.00/3.8 FW 0-9</td><td>3141.0</td><td>10</td></tr><tr><td>BK 5.00/3.8 FW 1-10</td><td>3142.0</td><td>10</td></tr><tr><td>BK 5.00/3.8 FW 11-20</td><td>3143.0</td><td>10</td></tr><tr><td>BK 5.00/3.8 FW 21-30</td><td>3144.0</td><td>10</td></tr><tr><td>BK 5.00/3.8 FW 31-40</td><td>3145.0</td><td>10</td></tr></table>	BK 5.00/3.8 So	3185.0	10	BK 5.00/3.8 FW 0-9	3141.0	10	BK 5.00/3.8 FW 1-10	3142.0	10	BK 5.00/3.8 FW 11-20	3143.0	10	BK 5.00/3.8 FW 21-30	3144.0	10	BK 5.00/3.8 FW 31-40	3145.0	10	<table><tr><td>BK 5.08/3.8 So</td><td>3186.0</td><td>10</td></tr><tr><td>BK 5.08/3.8 FW 0-9</td><td>3146.0</td><td>10</td></tr><tr><td>BK 5.08/3.8 FW 1-10</td><td>3147.0</td><td>10</td></tr><tr><td>BK 5.08/3.8 FW 11-20</td><td>3148.0</td><td>10</td></tr><tr><td>BK 5.08/3.8 FW 21-30</td><td>3149.0</td><td>10</td></tr><tr><td>BK 5.08/3.8 FW 31-40</td><td>3150.0</td><td>10</td></tr></table>	BK 5.08/3.8 So	3186.0	10	BK 5.08/3.8 FW 0-9	3146.0	10	BK 5.08/3.8 FW 1-10	3147.0	10	BK 5.08/3.8 FW 11-20	3148.0	10	BK 5.08/3.8 FW 21-30	3149.0	10	BK 5.08/3.8 FW 31-40	3150.0	10
BK 5.00/3.8 So	3185.0	10																																				
BK 5.00/3.8 FW 0-9	3141.0	10																																				
BK 5.00/3.8 FW 1-10	3142.0	10																																				
BK 5.00/3.8 FW 11-20	3143.0	10																																				
BK 5.00/3.8 FW 21-30	3144.0	10																																				
BK 5.00/3.8 FW 31-40	3145.0	10																																				
BK 5.08/3.8 So	3186.0	10																																				
BK 5.08/3.8 FW 0-9	3146.0	10																																				
BK 5.08/3.8 FW 1-10	3147.0	10																																				
BK 5.08/3.8 FW 11-20	3148.0	10																																				
BK 5.08/3.8 FW 21-30	3149.0	10																																				
BK 5.08/3.8 FW 31-40	3150.0	10																																				
Card, printed, continual, horizontal:																																						

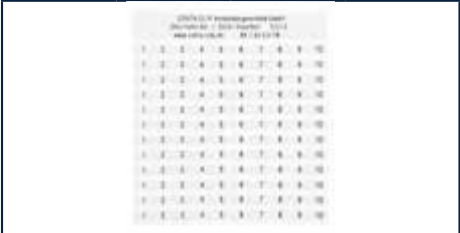	BAK 7.50/3.8	BAK 7.62/3.8																																																
																																																		
Characteristics																																																		
Material / colour	Polyester / white	Polyester / white																																																
Temperature range	-40 °C / +120 °C	-40 °C / +120 °C																																																
Pitch / Tag height	7.50 / 3.8 mm	7.62 / 3.8 mm																																																
Number of tags per row / sheet	10 / 120	10 / 140																																																
Printing process	Thermal transfer	Thermal transfer																																																
Wipe resistance when printing	DIN EN 61010-1 (VDE 0411-1)	DIN EN 61010-1 (VDE 0411-1)																																																
Order information	<table> <tr> <th>Type</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td>BK 7.50/3.8 neutral</td><td>3178.0</td><td>10</td></tr> <tr> <td>BK 7.50/3.8 So</td><td>3187.0</td><td>10</td></tr> <tr> <td>BK 7.50/3.8 FW 0-9</td><td>3151.0</td><td>10</td></tr> <tr> <td>BK 7.50/3.8 FW 1-10</td><td>3152.0</td><td>10</td></tr> <tr> <td>BK 7.50/3.8 FW 11-20</td><td>3153.0</td><td>10</td></tr> <tr> <td>BK 7.50/3.8 FW 21-30</td><td>3154.0</td><td>10</td></tr> <tr> <td>BK 7.50/3.8 FW 31-40</td><td>3155.0</td><td>10</td></tr> </table>	Type	Cat. no.	Qty.	BK 7.50/3.8 neutral	3178.0	10	BK 7.50/3.8 So	3187.0	10	BK 7.50/3.8 FW 0-9	3151.0	10	BK 7.50/3.8 FW 1-10	3152.0	10	BK 7.50/3.8 FW 11-20	3153.0	10	BK 7.50/3.8 FW 21-30	3154.0	10	BK 7.50/3.8 FW 31-40	3155.0	10	<table> <tr> <th>Type</th><th>Cat. no.</th><th>Qty.</th></tr> <tr> <td>BK 7.62/3.8 neutral</td><td>3179.0</td><td>10</td></tr> <tr> <td>BK 7.62/3.8 So</td><td>3188.0</td><td>10</td></tr> <tr> <td>BK 7.62/3.8 FW 0-9</td><td>3156.0</td><td>10</td></tr> <tr> <td>BK 7.62/3.8 FW 1-10</td><td>3157.0</td><td>10</td></tr> <tr> <td>BK 7.62/3.8 FW 11-20</td><td>3158.0</td><td>10</td></tr> <tr> <td>BK 7.62/3.8 FW 21-30</td><td>3159.0</td><td>10</td></tr> <tr> <td>BK 7.62/3.8 FW 31-40</td><td>3160.0</td><td>10</td></tr> </table>	Type	Cat. no.	Qty.	BK 7.62/3.8 neutral	3179.0	10	BK 7.62/3.8 So	3188.0	10	BK 7.62/3.8 FW 0-9	3156.0	10	BK 7.62/3.8 FW 1-10	3157.0	10	BK 7.62/3.8 FW 11-20	3158.0	10	BK 7.62/3.8 FW 21-30	3159.0	10	BK 7.62/3.8 FW 31-40	3160.0	10
Type	Cat. no.	Qty.																																																
BK 7.50/3.8 neutral	3178.0	10																																																
BK 7.50/3.8 So	3187.0	10																																																
BK 7.50/3.8 FW 0-9	3151.0	10																																																
BK 7.50/3.8 FW 1-10	3152.0	10																																																
BK 7.50/3.8 FW 11-20	3153.0	10																																																
BK 7.50/3.8 FW 21-30	3154.0	10																																																
BK 7.50/3.8 FW 31-40	3155.0	10																																																
Type	Cat. no.	Qty.																																																
BK 7.62/3.8 neutral	3179.0	10																																																
BK 7.62/3.8 So	3188.0	10																																																
BK 7.62/3.8 FW 0-9	3156.0	10																																																
BK 7.62/3.8 FW 1-10	3157.0	10																																																
BK 7.62/3.8 FW 11-20	3158.0	10																																																
BK 7.62/3.8 FW 21-30	3159.0	10																																																
BK 7.62/3.8 FW 31-40	3160.0	10																																																

	BS-1		
			
Characteristics			
Line width	0.4 mm		
Colour	Black		
Storage temperature	+5°C / +20°C		
Storage at rel. humidity level of:	30% to 60%		
Characteristics	smudge-proof		
Order information	Type	Cat. no.	Qty.
	BS-1	2034.0	1

Locking-base system RS-SP

Extruded profiles can be used for the main holders of printed circuit boards.

The **RS-SP 1** and the **RS-SP 2** profiles have two PCB levels and are delivered in two-meter lengths. They can be easily shortened with a saw to the correct length. Naturally, we will also deliver the profiles according to your requirements. The profile can be shortened freely, without rigid pitch divisions. The individual fit of the enclosure profile to the electronics is thus guaranteed.

After you shorten the extruded profile to fit the desired module length or available space, you can mount the corresponding end plates and foot elements on to the module.

There are three graded profile versions available for different PCB widths: **RS-SP 0**, **RS-SP 1** and **RS-SP 2**.


Transparent cover profiles for the **RS-SP 1** system are available as **AD 1** (low version) and **AD 2** (high version) in one-meter lengths. The **AP/AD 1** (low version) and **AP/AD 2** (high version) end plates serve as holders. They are fastened to the cover profile by using the **BS-AD** mounting screws. The **RS-SP 1** and **RS-SP 2** versions are marked using the **SB** quick marking system in the specially designed marking grooves. (Refer to the sub-catalogue 6 "Marking components for ink-based marking systems".)

An **RS-SP** profile enclosure can consist of the following parts, depending on the requirements and assembly:


- **RS-SP** extruded profile (**RS-SPO**; **RS-SP 1**; **RS-SP 2** versions)

- AP end plates in varying versions:
 - **AP/TS (RS-SPO)** mount on the **TS 35** DIN rail.
 - **RS-SP 1** and **RS-SP 2** on DIN rail **TS 32/TS 35**
 - **AP/D** direct mount
 - **AP/AD 1** low version for attaching the **AD 1** transparent cover
 - **AP/AD 2** high version is for attaching the **AD 2** transparent cover
- **RF** mounting (snap-on) foot for mounting the **RS-SP 1** and **RS-SP 2** profiles onto the **TS 32/TS 35** rails
- **AD** transparent cover profile
 - **AD 1** low version
 - **AD 2** high version
- **BS-AD** mounting screws for fastening the **AD 1** and **AD 2** cover profiles
- **BS-RS** mounting screws for securing the **AP** end plates (types **RS-SPO** and **RS-SP 2**)


The **RS-SP** locking-base system is delivered in the standard orange colour. Other colours are available upon request!

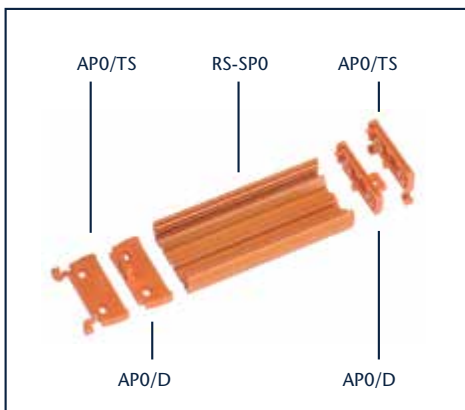

RS-SPO

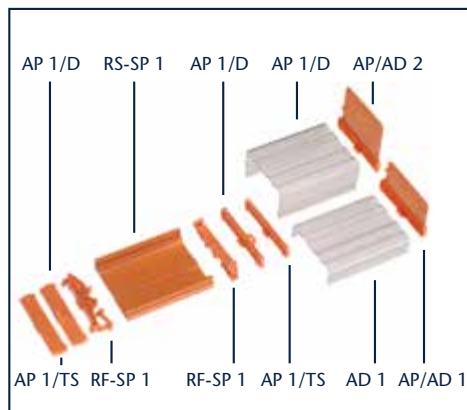

RS-SP 1

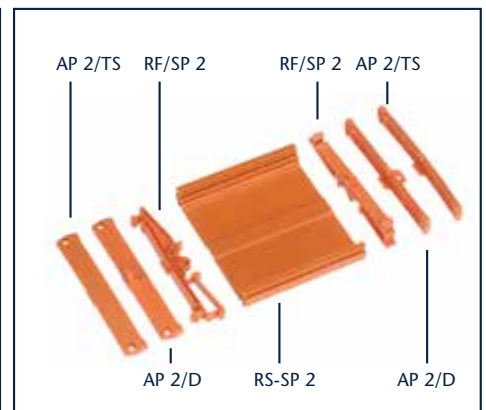

RS-SP 2

Locking-base system RS-SP

RS-SP 0



RS-SP 1



Dimensions	mm	Thickness mm	mm	Thickness mm		
PCB upper level	42.25	1.5 + 0.2	73	1.5 + 0.2		
PCB lower level			68	1.5 + 0.2		
Total width	46.5		84			
Length	2000		2000			
Required profile length	Circuit board length - 4.0 mm		Circuit board length - 4.5 mm			
Height on TS 32			43			
Height on TS 35	27		40			
Height when directly mounted	19		17			
Height of AD 1			25			
Height of AD 2			45			
Characteristics						
Material	RS-SP = PVC AP/RF = PA 6.6 / UL 94 V-2		RS-SP = PVC AP/RF = PA 6.6 / UL 94 V-2			
Individual components	Type	Cat. no.	Qty.	Type	Cat. no.	Qty.
Extruded profile	RS-SP 0 orange	5675.3	1	RS-SP 1 orange	5680.3	1
End plate / DIN rail mount	AP 0/TS orange	3133.3	20	AP 1/TS orange	5681.3	20
End plate / direct mount	AP 0/D orange	3134.3	20	AP 1/D orange	5682.3	20
End plate for AD 1				AP/AD 1	5891.0	20
End plate for AD 2				AP/AD 2	5895.0	20
Mounting screws BS-RS	BS/RS	4560.0	100			
AD 1 cover profile				AD 1	5893.0	1
Cover profile AD-2				AD 2	5894.0	1
Mounting screws for cover profile BS-AD				BS/AD	2385.0	100
Mounting foot for TS 32/35				RF/SP 1 orange	5683.3	20

RS-SP 2



Dimensions	mm	Thickness mm	
PCB upper level	108.5	1.5 + 0.2	
PCB lower level	100	1.5 + 0.2	
Total width	119		
Length	2000		
Required profile length	Circuit board length - 4.5 mm		
Height on TS 32	43		
Height on TS 35	40		
Height when directly mounted	17		
Height of AD 1			
Height of AD 2			
Characteristics			
Material	RS-SP = PVC AP/RF = PA 6.6 / UL 94 V-2		
Individual components	Type	Cat. no.	Qty.
Extruded profile	RS-SP 2 orange	5690.3	1
End plate / DIN rail mount	AP 2/TS orange	5691.3	20
End plate / direct mount	AP 2/D orange	5692.3	20
End plate for AD 1			
End plate for AD 2			
Mounting screws BS-RS	BS/RS	4560.0	100
AD 1 cover profile			
Cover profile AD-2			
Mounting screws for cover profile BS-AD			
Mounting foot for TS 32/35	RF/SP 2 orange	5693.3	20

192 **Dynamic Measurement & Control Solutions** www.dynamicrep.com sales@dynamicrep.com 408-780-9190

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PBK 2,5/11/7,50-H GN	14411.1	19	PBK 4101/20/5,00-KD LG	13126.0	16	PBK 4291/8/3,50-KD LG	13292.0	14
PBK 2,5/11/7,50-V GN	14391.1	19	PBK 4101/21/5,00-KD LG	13127.0	16	PBK 4291/8/3,50-KDVP LG	13316.0	14
PBK 2,5/12/5,00-H GN	14372.1	17	PBK 4101/22/5,00-KD LG	13128.0	16	PBK 4291/9/3,50-KD LG	13293.0	14
PBK 2,5/12/5,00-V GN	14352.1	17	PBK 4101/23/5,00-KD LG	13129.0	16	PBK 4291/9/3,50-KDVP LG	13317.0	14
PBK 2,5/12/7,50-H GN	14412.1	19	PBK 4101/24/5,00-KD LG	13130.0	16	PBK 5/1/11,50-H GN	14490.1	21
PBK 2,5/12/7,50-V GN	14392.1	19	PBK 4101/3/5,00-KD LG	13109.0	16	PBK 5/1/11,50-H GN	14491.1	21
PBK 2,5/2/5,00-H GN	14362.1	17	PBK 4101/4/5,00-KD LG	13110.0	16	PBK 5/1/7,50-H GN	14420.1	20
PBK 2,5/2/5,00-V GN	14342.1	17	PBK 4101/5/5,00-KD LG	13111.0	16	PBK 5/1/7,50-H GN	14421.1	20
PBK 2,5/2/7,50-H GN	14402.1	19	PBK 4101/6/5,00-KD LG	13112.0	16	PBK 5/1/7,50-H-VP GN	14440.1	20
PBK 2,5/2/7,50-V GN	14382.1	19	PBK 4101/7/5,00-KD LG	13113.0	16	PBK 5/1/7,50-H-VP GN	14441.1	20
PBK 2,5/3/5,00-H GN	14363.1	17	PBK 4101/8/5,00-KD LG	13114.0	16	PBK 5/10/11,50-H GN	14500.1	21
PBK 2,5/3/5,00-V GN	14343.1	17	PBK 4101/9/5,00-KD LG	13115.0	16	PBK 5/10/7,50-H GN	14430.1	20
PBK 2,5/3/7,50-H GN	14403.1	19	PBK 4191/10/2,50-KD LG	14560.0	12	PBK 5/10/7,50-H-VP GN	14450.1	20
PBK 2,5/3/7,50-V GN	14383.1	19	PBK 4191/10/2,50-KDVP LG	14580.0	12	PBK 5/11/11,50-H GN	14501.1	21
PBK 2,5/4/5,00-H GN	14364.1	17	PBK 4191/11/2,50-KD LG	14561.0	12	PBK 5/11/7,50-H GN	14431.1	20
PBK 2,5/4/5,00-V GN	14344.1	17	PBK 4191/11/2,50-KDVP LG	14581.0	12	PBK 5/11/7,50-H-VP GN	14451.1	20
PBK 2,5/4/7,50-H GN	14404.1	19	PBK 4191/12/2,50-KD LG	14562.0	12	PBK 5/12/11,50-H GN	14502.1	21
PBK 2,5/4/7,50-V GN	14384.1	19	PBK 4191/12/2,50-KDVP LG	14582.0	12	PBK 5/12/7,50-H GN	14432.1	20
PBK 2,5/5/5,00-H GN	14365.1	17	PBK 4191/2/2,50-KD LG	14552.0	12	PBK 5/12/7,50-H-VP GN	14452.1	20
PBK 2,5/5/5,00-V GN	14345.1	17	PBK 4191/2/2,50-KDVP LG	14572.0	12	PBK 5/2/11,50-H GN	14492.1	21
PBK 2,5/5/7,50-H GN	14405.1	19	PBK 4191/3/2,50-KD LG	14553.0	12	PBK 5/2/7,50-H GN	14422.1	20
PBK 2,5/5/7,50-V GN	14385.1	19	PBK 4191/3/2,50-KDVP LG	14573.0	12	PBK 5/2/7,50-H-VP GN	14442.1	20
PBK 2,5/6/5,00-H GN	14366.1	17	PBK 4191/4/2,50-KD LG	14554.0	12	PBK 5/3/11,50-H GN	14493.1	21
PBK 2,5/6/5,00-V GN	14346.1	17	PBK 4191/4/2,50-KDVP LG	14574.0	12	PBK 5/3/7,50-H GN	14423.1	20
PBK 2,5/6/7,50-H GN	14406.1	19	PBK 4191/5/2,50-KD LG	14555.0	12	PBK 5/3/7,50-H-VP GN	14443.1	20
PBK 2,5/6/7,50-V GN	14386.1	19	PBK 4191/5/2,50-KDVP LG	14575.0	12	PBK 5/4/11,50-H GN	14494.1	21
PBK 2,5/7/5,00-H GN	14367.1	17	PBK 4191/6/2,50-KD LG	14556.0	12	PBK 5/4/7,50-H GN	14424.1	20
PBK 2,5/7/5,00-V GN	14347.1	17	PBK 4191/6/2,50-KDVP LG	14576.0	12	PBK 5/4/7,50-H-VP GN	14444.1	20
PBK 2,5/7/7,50-H GN	14407.1	19	PBK 4191/7/2,50-KD LG	14557.0	12	PBK 5/5/11,50-H GN	14495.1	21
PBK 2,5/7/7,50-V GN	14387.1	19	PBK 4191/7/2,50-KDVP LG	14577.0	12	PBK 5/5/7,50-H GN	14425.1	20
PBK 2,5/8/5,00-H GN	14368.1	17	PBK 4191/8/2,50-KD LG	14558.0	12	PBK 5/5/7,50-H-VP GN	14445.1	20
PBK 2,5/8/5,00-V GN	14348.1	17	PBK 4191/8/2,50-KDVP LG	14578.0	12	PBK 5/6/11,50-H GN	14496.1	21
PBK 2,5/8/7,50-H GN	14408.1	19	PBK 4191/9/2,50-KD LG	14559.0	12	PBK 5/6/7,50-H GN	14426.1	20
PBK 2,5/8/7,50-V GN	14388.1	19	PBK 4191/9/2,50-KDVP LG	14579.0	12	PBK 5/6/7,50-H-VP GN	14446.1	20
PBK 2,5/9/5,00-H GN	14369.1	17	PBK 4291/10/3,50-KD LG	13294.0	14	PBK 5/7/11,50-H GN	14497.1	21
PBK 2,5/9/5,00-V GN	14349.1	17	PBK 4291/10/3,50-KDVP LG	13318.0	14	PBK 5/7/7,50-H GN	14427.1	20
PBK 2,5/9/7,50-H GN	14409.1	19	PBK 4291/11/3,50-KD LG	13295.0	14	PBK 5/7/7,50-H-VP GN	14447.1	20
PBK 2,5/9/7,50-V GN	14389.1	19	PBK 4291/11/3,50-KDVP LG	13319.0	14	PBK 5/8/11,50-H GN	14498.1	21
PBK 4091/1/KD 4,0-SMD WH	30741.7	22	PBK 4291/12/3,50-KD LG	13296.0	14	PBK 5/8/7,50-H GN	14428.1	20
PBK 4091/2/KD 4,0-SMD WH	30742.7	22	PBK 4291/12/3,50-KDVP LG	13320.0	14	PBK 5/8/7,50-H-VP GN	14448.1	20
PBK 4091/3/KD 4,0-SMD WH	30743.7	22	PBK 4291/13/3,50-KD LG	13297.0	14	PBK 5/9/11,50-H GN	14499.1	21
PBK 4091/4/KD 4,0-SMD WH	30744.7	22	PBK 4291/13/3,50-KDVP LG	13321.0	14	PBK 5/9/7,50-H GN	14429.1	20
PBK 4100/10/5,00 LG	13093.0	16	PBK 4291/14/3,50-KD LG	13298.0	14	PBK 5/9/7,50-H-VP GN	14449.1	20
PBK 4100/11/5,00 LG	13094.0	16	PBK 4291/14/3,50-KDVP LG	13322.0	14	PBKZ 4301/2/5,08-KD GN	13131.1	18
PBK 4100/12/5,00 LG	13095.0	16	PBK 4291/15/3,50-KD LG	13299.0	14	PBKZ 4301/3/5,08-KD GN	13132.1	18
PBK 4100/13/5,00 LG	13096.0	16	PBK 4291/15/3,50-KDVP LG	13323.0	14	PBKZ 4301/4/5,08-KD GN	13133.1	18
PBK 4100/14/5,00 LG	13097.0	16	PBK 4291/16/3,50-KD LG	13300.0	14	PBKZ 4301/5/5,08-KD GN	13134.1	18
PBK 4100/15/5,00 LG	13098.0	16	PBK 4291/16/3,50-KDVP LG	13324.0	14	PBKZ 4301/6/5,08-KD GN	13135.1	18
PBK 4100/16/5,00 LG	13099.0	16	PBK 4291/17/3,50-KD LG	13301.0	14	PBKZ 4301/7/5,08-KD GN	13136.1	18
PBK 4100/17/5,00 LG	13100.0	16	PBK 4291/17/3,50-KDVP LG	13325.0	14	PBKZ 4301/8/5,08-KD GN	13137.1	18
PBK 4100/18/5,00 LG	13101.0	16	PBK 4291/18/3,50-KD LG	13302.0	14	PBKZ 4701/10/3,81-H-KD GN	14660.1	15
PBK 4100/19/5,00 LG	13102.0	16	PBK 4291/18/3,50-KDVP LG	13326.0	14	PBKZ 4701/10/3,81-V-KD GN	14640.1	15
PBK 4100/2/5,00 LG	13085.0	16	PBK 4291/19/3,50-KD LG	13303.0	14	PBKZ 4701/11/3,81-H-KD GN	14661.1	15
PBK 4100/20/5,00 LG	13103.0	16	PBK 4291/19/3,50-KDVP LG	13327.0	14	PBKZ 4701/11/3,81-V-KD GN	14641.1	15
PBK 4100/21/5,00 LG	13104.0	16	PBK 4291/2/3,50-KD LG	13286.0	14	PBKZ 4701/12/3,81-H-KD GN	14662.1	15
PBK 4100/22/5,00 LG	13105.0	16	PBK 4291/2/3,50-KDVP LG	13310.0	14	PBKZ 4701/12/3,81-V-KD GN	14642.1	15
PBK 4100/23/5,00 LG	13106.0	16	PBK 4291/20/3,50-KD LG	13304.0	14	PBKZ 4701/2/3,81-H-KD GN	14652.1	15
PBK 4100/24/5,00 LG	13107.0	16	PBK 4291/20/3,50-KDVP LG	13328.0	14	PBKZ 4701/2/3,81-V-KD GN	14632.1	15
PBK 4100/3/5,00 LG	13086.0	16	PBK 4291/21/3,50-KD LG	13305.0	14	PBKZ 4701/3/3,81-H-KD GN	14653.1	15
PBK 4100/4/5,00 LG	13087.0	16	PBK 4291/21/3,50-KDVP LG	13329.0	14	PBKZ 4701/3/3,81-V-KD GN	14633.1	15
PBK 4100/5/5,00 LG	13088.0	16	PBK 4291/22/3,50-KD LG	13306.0	14	PBKZ 4701/4/3,81-H-KD GN	14654.1	15
PBK 4100/6/5,00 LG	13089.0	16	PBK 4291/22/3,50-KDVP LG	13330.0	14	PBKZ 4701/4/3,81-V-KD GN	14634.1	15
PBK 4100/7/5,00 LG	13090.0	16	PBK 4291/23/3,50-KD LG	13307.0	14	PBKZ 4701/5/3,81-H-KD GN	14655.1	15
PBK 4100/8/5,00 LG	13091.0	16	PBK 4291/23/3,50-KDVP LG	13331.0	14	PBKZ 4701/5/3,81-V-KD GN	14635.1	15
PBK 4100/9/5,00 LG	13092.0	16	PBK 4291/24/3,50-KD LG	13308.0	14	PBKZ 4701/6/3,81-H-KD GN	14656.1	15
PBK 4101/10/5,00-KD LG	13116.0	16	PBK 4291/24/3,50-KDVP LG	13332.0	14	PBKZ 4701/6/3,81-V-KD GN	14636.1	15
PBK 4101/11/5,00-KD LG	13117.0	16	PBK 4291/3/3,50-KD LG	13287.0	14	PBKZ 4701/7/3,81-H-KD GN	14657.1	15
PBK 4101/12/5,00-KD LG	13118.0	16	PBK 4291/3/3,50-KDVP LG	13311.0	14	PBKZ 4701/7/3,81-V-KD GN	14637.1	15
PBK 4101/13/5,00-KD LG	13119.0	16	PBK 4291/4/3,50-KD LG	13288.0	14	PBKZ 4701/8/3,81-H-KD GN	14658.1	15
PBK 4101/14/5,00-KD LG	13120.0	16	PBK 4291/4/3,50-KDVP LG	13312.0	14	PBKZ 4701/8/3,81-V-KD GN	14638.1	15
PBK 4101/15/5,00-KD LG	13121.0	16	PBK 4291/5/3,50-KD LG	13289.0	14	PBKZ 4701/9/3,81-H-KD GN	14659.1	15
PBK 4101/16/5,00-KD LG	13122.0	16	PBK 4291/5/3,50-KDVP LG	13313.0	14	PBKZ 4701/9/3,81-V-KD GN	14639.1	15
PBK 4101/17/5,00-KD LG	13123.0	16	PBK 4291/6/3,50-KD LG	13290.0	14	PBKZ 4791/10/2,54-H-KD GN	14620.1	13
PBK 4101/18/5,00-KD LG	13124.0	16	PBK 4291/6/3,50-KDVP LG	13314.0	14	PBKZ 4791/10/2,54-V-KD GN	14600.1	13
PBK 4101/19/5,00-KD LG	13125.0	16	PBK 4291/7/3,50-KD LG	13291.0	14	PBKZ 4791/11/2,54-H-KD GN	14621.1	13
PBK 4101/2/5,00-KD LG	13108.0	16	PBK 4291/7/3,50-KDVP LG	13315.0	14	PBKZ 4791/11/2,54-V-KD GN	14601.1	13

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PBKZ 4791/12/2,54-H-KD GN	14622.1	13	PBT 1200/23/5,08 GN	11375.1	121	PFB 4551/12/3,50-FKD GN	30292.1	89
PBKZ 4791/12/2,54-V-KD GN	14602.1	13	PBT 1200/23/5,08-F GN	31383.1	121	PFB 4551/12/3,50-KD GN	30272.1	89
PBKZ 4791/2/2,54-H-KD GN	14612.1	13	PBT 1200/24/5,0 GN	31444.1	120	PFB 4551/13/3,50-FKD GN	30293.1	89
PBKZ 4791/2/2,54-V-KD GN	14592.1	13	PBT 1200/24/5,0-F GN	31414.1	120	PFB 4551/13/3,50-KD GN	30273.1	89
PBKZ 4791/3/2,54-H-KD GN	14613.1	13	PBT 1200/24/5,08 GN	11376.1	121	PFB 4551/14/3,50-FKD GN	30294.1	89
PBKZ 4791/3/2,54-V-KD GN	14593.1	13	PBT 1200/24/5,08-F GN	31384.1	121	PFB 4551/14/3,50-KD GN	30274.1	89
PBKZ 4791/4/2,54-H-KD GN	14614.1	13	PBT 1200/3/5,0 GN	31423.1	120	PFB 4551/15/3,50-FKD GN	30295.1	89
PBKZ 4791/4/2,54-V-KD GN	14594.1	13	PBT 1200/3/5,0-F GN	31393.1	120	PFB 4551/15/3,50-KD GN	30275.1	89
PBKZ 4791/5/2,54-H-KD GN	14615.1	13	PBT 1200/3/5,08 GN	11355.1	121	PFB 4551/16/3,50-FKD GN	30296.1	89
PBKZ 4791/5/2,54-V-KD GN	14595.1	13	PBT 1200/3/5,08-F GN	31363.1	121	PFB 4551/16/3,50-KD GN	30276.1	89
PBKZ 4791/6/2,54-H-KD GN	14616.1	13	PBT 1200/4/5,0 GN	31424.1	120	PFB 4551/17/3,50-FKD GN	30297.1	89
PBKZ 4791/6/2,54-V-KD GN	14596.1	13	PBT 1200/4/5,0-F GN	31394.1	120	PFB 4551/17/3,50-KD GN	30277.1	89
PBKZ 4791/7/2,54-H-KD GN	14617.1	13	PBT 1200/4/5,08 GN	11356.1	121	PFB 4551/18/3,50-FKD GN	30298.1	89
PBKZ 4791/7/2,54-V-KD GN	14597.1	13	PBT 1200/4/5,08-F GN	31364.1	121	PFB 4551/18/3,50-KD GN	30278.1	89
PBKZ 4791/8/2,54-H-KD GN	14618.1	13	PBT 1200/5/5,0 GN	31425.1	120	PFB 4551/19/3,50-FKD GN	30299.1	89
PBKZ 4791/8/2,54-V-KD GN	14598.1	13	PBT 1200/5/5,0-F GN	31395.1	120	PFB 4551/19/3,50-KD GN	30279.1	89
PBKZ 4791/9/2,54-H-KD GN	14619.1	13	PBT 1200/5/5,08 GN	11357.1	121	PFB 4551/2/3,50-FKD GN	30282.1	89
PBKZ 4791/9/2,54-V-KD GN	14599.1	13	PBT 1200/5/5,08-F GN	31365.1	121	PFB 4551/2/3,50-KD GN	30262.1	89
PBT 1200/10/5,0 GN	31430.1	120	PBT 1200/6/5,0 GN	31426.1	120	PFB 4551/20/3,50-FKD GN	30300.1	89
PBT 1200/10/5,0-F GN	31400.1	120	PBT 1200/6/5,0-F GN	31396.1	120	PFB 4551/20/3,50-KD GN	30280.1	89
PBT 1200/10/5,08 GN	11362.1	121	PBT 1200/6/5,08 GN	11358.1	121	PFB 4551/3/3,50-FKD GN	30283.1	89
PBT 1200/10/5,08-F GN	31370.1	121	PBT 1200/6/5,08-F GN	31366.1	121	PFB 4551/3/3,50-KD GN	30263.1	89
PBT 1200/11/5,0 GN	31431.1	120	PBT 1200/7/5,0 GN	31427.1	120	PFB 4551/4/3,50-FKD GN	30284.1	89
PBT 1200/11/5,0-F GN	31401.1	120	PBT 1200/7/5,0-F GN	31397.1	120	PFB 4551/4/3,50-KD GN	30264.1	89
PBT 1200/11/5,08 GN	11363.1	121	PBT 1200/7/5,08 GN	11359.1	121	PFB 4551/5/3,50-FKD GN	30285.1	89
PBT 1200/11/5,08-F GN	31371.1	121	PBT 1200/7/5,08-F GN	31367.1	121	PFB 4551/5/3,50-KD GN	30265.1	89
PBT 1200/12/5,0 GN	31432.1	120	PBT 1200/8/5,0 GN	31428.1	120	PFB 4551/6/3,50-FKD GN	30286.1	89
PBT 1200/12/5,0-F GN	31402.1	120	PBT 1200/8/5,0-F GN	31398.1	120	PFB 4551/6/3,50-KD GN	30266.1	89
PBT 1200/12/5,08 GN	11364.1	121	PBT 1200/8/5,08 GN	11360.1	121	PFB 4551/7/3,50-FKD GN	30287.1	89
PBT 1200/12/5,08-F GN	31372.1	121	PBT 1200/8/5,08-F GN	31368.1	121	PFB 4551/7/3,50-KD GN	30267.1	89
PBT 1200/13/5,0 GN	31433.1	120	PBT 1200/9/5,0 GN	31429.1	120	PFB 4551/8/3,50-FKD GN	30288.1	89
PBT 1200/13/5,0-F GN	31403.1	120	PBT 1200/9/5,0-F GN	31399.1	120	PFB 4551/8/3,50-KD GN	30268.1	89
PBT 1200/13/5,08 GN	11365.1	121	PBT 1200/9/5,08 GN	11361.1	121	PFB 4551/9/3,50-FKD GN	30289.1	89
PBT 1200/13/5,08-F GN	31373.1	121	PBT 1200/9/5,08-F GN	31369.1	121	PFB 4551/9/3,50-KD GN	30269.1	89
PBT 1200/14/5,0 GN	31434.1	120	PFB 4541/10/3,50-FRKD GN	31660.1	88	PFB 4561/10/3,50-FKD GN	30330.1	90
PBT 1200/14/5,0-F GN	31404.1	120	PFB 4541/10/3,50-KD GN	31640.1	88	PFB 4561/10/3,50-KD GN	30310.1	90
PBT 1200/14/5,08 GN	11366.1	121	PFB 4541/11/3,50-FRKD GN	31661.1	88	PFB 4561/11/3,50-FKD GN	30331.1	90
PBT 1200/14/5,08-F GN	31374.1	121	PFB 4541/11/3,50-KD GN	31641.1	88	PFB 4561/11/3,50-KD GN	30311.1	90
PBT 1200/15/5,0 GN	31435.1	120	PFB 4541/12/3,50-FRKD GN	31662.1	88	PFB 4561/12/3,50-FKD GN	30332.1	90
PBT 1200/15/5,0-F GN	31405.1	120	PFB 4541/12/3,50-KD GN	31642.1	88	PFB 4561/12/3,50-KD GN	30312.1	90
PBT 1200/15/5,08 GN	11367.1	121	PFB 4541/13/3,50-FRKD GN	31663.1	88	PFB 4561/13/3,50-FKD GN	30333.1	90
PBT 1200/15/5,08-F GN	31375.1	121	PFB 4541/13/3,50-KD GN	31643.1	88	PFB 4561/13/3,50-KD GN	30313.1	90
PBT 1200/16/5,0 GN	31436.1	120	PFB 4541/14/3,50-FRKD GN	31664.1	88	PFB 4561/14/3,50-FKD GN	30334.1	90
PBT 1200/16/5,0-F GN	31406.1	120	PFB 4541/14/3,50-KD GN	31644.1	88	PFB 4561/14/3,50-KD GN	30314.1	90
PBT 1200/16/5,08 GN	11368.1	121	PFB 4541/15/3,50-FRKD GN	31665.1	88	PFB 4561/15/3,50-FKD GN	30335.1	90
PBT 1200/16/5,08-F GN	31376.1	121	PFB 4541/15/3,50-KD GN	31645.1	88	PFB 4561/15/3,50-KD GN	30315.1	90
PBT 1200/17/5,0 GN	31437.1	120	PFB 4541/16/3,50-FRKD GN	31666.1	88	PFB 4561/16/3,50-FKD GN	30336.1	90
PBT 1200/17/5,0-F GN	31407.1	120	PFB 4541/16/3,50-KD GN	31646.1	88	PFB 4561/16/3,50-KD GN	30316.1	90
PBT 1200/17/5,08 GN	11369.1	121	PFB 4541/17/3,50-FRKD GN	31667.1	88	PFB 4561/17/3,50-FKD GN	30337.1	90
PBT 1200/17/5,08-F GN	31377.1	121	PFB 4541/17/3,50-KD GN	31647.1	88	PFB 4561/17/3,50-KD GN	30317.1	90
PBT 1200/18/5,0 GN	31438.1	120	PFB 4541/18/3,50-FRKD GN	31668.1	88	PFB 4561/18/3,50-FKD GN	30338.1	90
PBT 1200/18/5,0-F GN	31408.1	120	PFB 4541/18/3,50-KD GN	31648.1	88	PFB 4561/18/3,50-KD GN	30318.1	90
PBT 1200/18/5,08 GN	11370.1	121	PFB 4541/19/3,50-FRKD GN	31669.1	88	PFB 4561/19/3,50-FKD GN	30339.1	90
PBT 1200/18/5,08-F GN	31378.1	121	PFB 4541/19/3,50-KD GN	31649.1	88	PFB 4561/19/3,50-KD GN	30319.1	90
PBT 1200/19/5,0 GN	31439.1	120	PFB 4541/2/3,50-FRKD GN	31652.1	88	PFB 4561/2/3,50-FKD GN	30322.1	90
PBT 1200/19/5,0-F GN	31409.1	120	PFB 4541/2/3,50-KD GN	31632.1	88	PFB 4561/2/3,50-KD GN	30302.1	90
PBT 1200/19/5,08 GN	11371.1	121	PFB 4541/20/3,50-FRKD GN	31670.1	88	PFB 4561/20/3,50-FKD GN	30340.1	90
PBT 1200/19/5,08-F GN	31379.1	121	PFB 4541/20/3,50-KD GN	31650.1	88	PFB 4561/20/3,50-KD GN	30320.1	90
PBT 1200/2/5,0 GN	31422.1	120	PFB 4541/3/3,50-FRKD GN	31653.1	88	PFB 4561/3/3,50-FKD GN	30323.1	90
PBT 1200/2/5,0-F GN	31392.1	120	PFB 4541/3/3,50-KD GN	31633.1	88	PFB 4561/3/3,50-KD GN	30303.1	90
PBT 1200/2/5,08 GN	11354.1	121	PFB 4541/4/3,50-FRKD GN	31654.1	88	PFB 4561/4/3,50-FKD GN	30324.1	90
PBT 1200/2/5,08-F GN	31362.1	121	PFB 4541/4/3,50-KD GN	31634.1	88	PFB 4561/4/3,50-KD GN	30304.1	90
PBT 1200/20/5,0 GN	31440.1	120	PFB 4541/5/3,50-FRKD GN	31655.1	88	PFB 4561/5/3,50-FKD GN	30325.1	90
PBT 1200/20/5,0-F GN	31410.1	120	PFB 4541/5/3,50-KD GN	31635.1	88	PFB 4561/5/3,50-KD GN	30305.1	90
PBT 1200/20/5,08 GN	11372.1	121	PFB 4541/6/3,50-FRKD GN	31656.1	88	PFB 4561/6/3,50-FKD GN	30326.1	90
PBT 1200/20/5,08-F GN	31380.1	121	PFB 4541/6/3,50-KD GN	31636.1	88	PFB 4561/6/3,50-KD GN	30306.1	90
PBT 1200/21/5,0 GN	31441.1	120	PFB 4541/7/3,50-FRKD GN	31657.1	88	PFB 4561/7/3,50-FKD GN	30327.1	90
PBT 1200/21/5,0-F GN	31411.1	120	PFB 4541/7/3,50-KD GN	31637.1	88	PFB 4561/7/3,50-KD GN	30307.1	90
PBT 1200/21/5,08 GN	11373.1	121	PFB 4541/8/3,50-FRKD GN	31658.1	88	PFB 4561/8/3,50-FKD GN	30328.1	90
PBT 1200/21/5,08-F GN	31381.1	121	PFB 4541/8/3,50-KD GN	31638.1	88	PFB 4561/8/3,50-KD GN	30308.1	90
PBT 1200/22/5,0 GN	31442.1	120	PFB 4541/9/3,50-FRKD GN	31659.1	88	PFB 4561/9/3,50-FKD GN	30329.1	90
PBT 1200/22/5,0-F GN	31412.1	120	PFB 4541/9/3,50-KD GN	31639.1	88	PFB 4561/9/3,50-KD GN	30309.1	90
PBT 1200/22/5,08 GN	11374.1	121	PFB 4551/10/3,50-FKD GN	30290.1	89	PFB 4951/10/5,00-FKD GN	30450.1	93
PBT 1200/22/5,08-F GN	31382.1	121	PFB 4551/10/3,50-KD GN	30270.1	89	PFB 4951/10/5,00-KD GN	30390.1	93
PBT 1200/23/5,0 GN	31443.1	120	PFB 4551/11/3,50-FKD GN	30291.1	89	PFB 4951/11/5,00-FKD GN	30451.1	93
PBT 1200/23/5,0-F GN	31413.1	120	PFB 4551/11/3,50-KD GN	30271.1	89	PFB 4951/11/5,00-KD GN	30391.1	93

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PFB 4951/12/5,00-FKD GN	30452.1	93	PFBZ 4551/6/7,62-FKD GN	30766.1	96	PFBZ 4951/21/5,08-FKD GN	30491.1	94
PFB 4951/12/5,00-KD GN	30392.1	93	PFBZ 4551/6/7,62-KD GN	30756.1	96	PFBZ 4951/21/5,08-KD GN	30431.1	94
PFB 4951/13/5,00-FKD GN	30453.1	93	PFBZ 4551/7/3,81-FKD GN	14020.1	91	PFBZ 4951/22/5,08-FKD GN	30492.1	94
PFB 4951/13/5,00-KD GN	30393.1	93	PFBZ 4551/7/3,81-KD GN	14005.1	91	PFBZ 4951/22/5,08-KD GN	30432.1	94
PFB 4951/14/5,00-FKD GN	30454.1	93	PFBZ 4551/7/7,62-FKD GN	30767.1	96	PFBZ 4951/23/5,08-FKD GN	30493.1	94
PFB 4951/14/5,00-KD GN	30394.1	93	PFBZ 4551/7/7,62-KD GN	30757.1	96	PFBZ 4951/23/5,08-KD GN	30433.1	94
PFB 4951/15/5,00-FKD GN	30455.1	93	PFBZ 4551/8/3,81-FKD GN	14021.1	91	PFBZ 4951/24/5,08-FKD GN	30494.1	94
PFB 4951/15/5,00-KD GN	30395.1	93	PFBZ 4551/8/3,81-KD GN	14006.1	91	PFBZ 4951/24/5,08-KD GN	30434.1	94
PFB 4951/16/5,00-FKD GN	30456.1	93	PFBZ 4551/8/7,62-FKD GN	30768.1	96	PFBZ 4951/3/5,08-FKD GN	30473.1	94
PFB 4951/16/5,00-KD GN	30396.1	93	PFBZ 4551/8/7,62-KD GN	30758.1	96	PFBZ 4951/3/5,08-KD GN	30413.1	94
PFB 4951/17/5,00-FKD GN	30457.1	93	PFBZ 4551/9/3,81-FKD GN	14022.1	91	PFBZ 4951/4/5,08-FKD GN	30474.1	94
PFB 4951/17/5,00-KD GN	30397.1	93	PFBZ 4551/9/3,81-KD GN	14007.1	91	PFBZ 4951/4/5,08-KD GN	30414.1	94
PFB 4951/18/5,00-FKD GN	30458.1	93	PFBZ 4551/9/7,62-FKD GN	30769.1	96	PFBZ 4951/5/5,08-FKD GN	30475.1	94
PFB 4951/18/5,00-KD GN	30398.1	93	PFBZ 4551/9/7,62-KD GN	30759.1	96	PFBZ 4951/5/5,08-KD GN	30415.1	94
PFB 4951/19/5,00-FKD GN	30459.1	93	PFBZ 4561/10/3,81-FKD GN	30370.1	92	PFBZ 4951/6/5,08-FKD GN	30476.1	94
PFB 4951/19/5,00-KD GN	30399.1	93	PFBZ 4561/10/3,81-KD GN	30350.1	92	PFBZ 4951/6/5,08-KD GN	30416.1	94
PFB 4951/2/5,00-FKD GN	30442.1	93	PFBZ 4561/11/3,81-FKD GN	30371.1	92	PFBZ 4951/7/5,08-FKD GN	30477.1	94
PFB 4951/2/5,00-KD GN	30382.1	93	PFBZ 4561/11/3,81-KD GN	30351.1	92	PFBZ 4951/7/5,08-KD GN	30417.1	94
PFB 4951/20/5,00-FKD GN	30460.1	93	PFBZ 4561/12/3,81-FKD GN	30372.1	92	PFBZ 4951/8/5,08-FKD GN	30478.1	94
PFB 4951/20/5,00-KD GN	30400.1	93	PFBZ 4561/12/3,81-KD GN	30352.1	92	PFBZ 4951/8/5,08-KD GN	30418.1	94
PFB 4951/21/5,00-FKD GN	30461.1	93	PFBZ 4561/13/3,81-FKD GN	30373.1	92	PFBZ 4951/9/5,08-FKD GN	30479.1	94
PFB 4951/21/5,00-KD GN	30401.1	93	PFBZ 4561/13/3,81-KD GN	30353.1	92	PFBZ 4951/9/5,08-KD GN	30419.1	94
PFB 4951/22/5,00-FKD GN	30462.1	93	PFBZ 4561/14/3,81-FKD GN	30374.1	92	PFBZ 4961/10/7,62-FKD GN	31610.1	95
PFB 4951/22/5,00-KD GN	30402.1	93	PFBZ 4561/14/3,81-KD GN	30354.1	92	PFBZ 4961/10/7,62-KD GN	31510.1	95
PFB 4951/23/5,00-FKD GN	30463.1	93	PFBZ 4561/15/3,81-FKD GN	30375.1	92	PFBZ 4961/11/7,62-FKD GN	31611.1	95
PFB 4951/23/5,00-KD GN	30403.1	93	PFBZ 4561/15/3,81-KD GN	30355.1	92	PFBZ 4961/11/7,62-KD GN	31511.1	95
PFB 4951/24/5,00-FKD GN	30464.1	93	PFBZ 4561/16/3,81-FKD GN	30376.1	92	PFBZ 4961/12/7,62-FKD GN	31612.1	95
PFB 4951/24/5,00-KD GN	30404.1	93	PFBZ 4561/16/3,81-KD GN	30356.1	92	PFBZ 4961/12/7,62-KD GN	31512.1	95
PFB 4951/3/5,00-FKD GN	30443.1	93	PFBZ 4561/17/3,81-FKD GN	30377.1	92	PFBZ 4961/2/7,62-FKD GN	31602.1	95
PFB 4951/3/5,00-KD GN	30383.1	93	PFBZ 4561/17/3,81-KD GN	30357.1	92	PFBZ 4961/2/7,62-KD GN	31502.1	95
PFB 4951/4/5,00-FKD GN	30444.1	93	PFBZ 4561/18/3,81-FKD GN	30378.1	92	PFBZ 4961/3/7,62-FKD GN	31603.1	95
PFB 4951/4/5,00-KD GN	30384.1	93	PFBZ 4561/18/3,81-KD GN	30358.1	92	PFBZ 4961/3/7,62-KD GN	31503.1	95
PFB 4951/5/5,00-FKD GN	30445.1	93	PFBZ 4561/19/3,81-FKD GN	30379.1	92	PFBZ 4961/4/7,62-FKD GN	31604.1	95
PFB 4951/5/5,00-KD GN	30385.1	93	PFBZ 4561/19/3,81-KD GN	30359.1	92	PFBZ 4961/4/7,62-KD GN	31504.1	95
PFB 4951/6/5,00-FKD GN	30446.1	93	PFBZ 4561/2/3,81-FKD GN	30362.1	92	PFBZ 4961/5/7,62-FKD GN	31605.1	95
PFB 4951/6/5,00-KD GN	30386.1	93	PFBZ 4561/2/3,81-KD GN	30342.1	92	PFBZ 4961/5/7,62-KD GN	31505.1	95
PFB 4951/7/5,00-FKD GN	30447.1	93	PFBZ 4561/20/3,81-FKD GN	30380.1	92	PFBZ 4961/6/7,62-FKD GN	31606.1	95
PFB 4951/7/5,00-KD GN	30387.1	93	PFBZ 4561/20/3,81-KD GN	30360.1	92	PFBZ 4961/6/7,62-KD GN	31506.1	95
PFB 4951/8/5,00-FKD GN	30448.1	93	PFBZ 4561/3/3,81-FKD GN	30363.1	92	PFBZ 4961/7/7,62-FKD GN	31607.1	95
PFB 4951/8/5,00-KD GN	30388.1	93	PFBZ 4561/3/3,81-KD GN	30343.1	92	PFBZ 4961/7/7,62-KD GN	31507.1	95
PFB 4951/9/5,00-FKD GN	30449.1	93	PFBZ 4561/4/3,81-FKD GN	30364.1	92	PFBZ 4961/8/7,62-FKD GN	31608.1	95
PFB 4951/9/5,00-KD GN	30389.1	93	PFBZ 4561/4/3,81-KD GN	30344.1	92	PFBZ 4961/8/7,62-KD GN	31508.1	95
PFBZ 4551/10/3,81-FKD GN	14023.1	91	PFBZ 4561/5/3,81-FKD GN	30365.1	92	PFBZ 4961/9/7,62-FKD GN	31609.1	95
PFBZ 4551/10/3,81-KD GN	14008.1	91	PFBZ 4561/5/3,81-KD GN	30345.1	92	PFBZ 4961/9/7,62-KD GN	31509.1	95
PFBZ 4551/10/7,62-FKD GN	30770.1	96	PFBZ 4561/6/3,81-FKD GN	30366.1	92	PK 100/10/10,00-H GN	10042.1	80
PFBZ 4551/10/7,62-KD GN	30760.1	96	PFBZ 4561/6/3,81-KD GN	30346.1	92	PK 100/10/10,00-V DG	10031.4	79
PFBZ 4551/11/3,81-FKD GN	14024.1	91	PFBZ 4561/7/3,81-FKD GN	30367.1	92	PK 100/10/10,00-V GN	10031.1	79
PFBZ 4551/11/3,81-KD GN	14009.1	91	PFBZ 4561/7/3,81-KD GN	30347.1	92	PK 100/10/5,00-H DG	10020.4	70
PFBZ 4551/12/3,81-FKD GN	14025.1	91	PFBZ 4561/8/3,81-FKD GN	30368.1	92	PK 100/10/5,00-H GN	10020.1	70
PFBZ 4551/12/3,81-KD GN	14010.1	91	PFBZ 4561/8/3,81-KD GN	30348.1	92	PK 100/10/5,00-H-BL DG	10064.4	71
PFBZ 4551/13/3,81-FKD GN	14026.1	91	PFBZ 4561/9/3,81-FKD GN	30369.1	92	PK 100/10/5,00-H-BL GN	10064.1	71
PFBZ 4551/13/3,81-KD GN	14011.1	91	PFBZ 4561/9/3,81-KD GN	30349.1	92	PK 100/10/5,00-V DG	10009.4	70
PFBZ 4551/14/3,81-FKD GN	14027.1	91	PFBZ 4951/10/5,08-FKD GN	30480.1	94	PK 100/10/5,00-V GN	10009.1	70
PFBZ 4551/14/3,81-KD GN	14012.1	91	PFBZ 4951/10/5,08-KD GN	30420.1	94	PK 100/10/5,00-V-BL DG	10053.4	71
PFBZ 4551/15/3,81-FKD GN	14028.1	91	PFBZ 4951/11/5,08-FKD GN	30481.1	94	PK 100/10/5,00-V-BL GN	10053.1	71
PFBZ 4551/15/3,81-KD GN	14013.1	91	PFBZ 4951/11/5,08-KD GN	30421.1	94	PK 100/11/10,00-H GN	10043.1	80
PFBZ 4551/16/3,81-FKD GN	14029.1	91	PFBZ 4951/12/5,08-FKD GN	30482.1	94	PK 100/11/10,00-V DG	10032.4	79
PFBZ 4551/16/3,81-KD GN	14014.1	91	PFBZ 4951/12/5,08-KD GN	30422.1	94	PK 100/11/10,00-V GN	10032.1	79
PFBZ 4551/2/3,81-FKD GN	14015.1	91	PFBZ 4951/13/5,08-FKD GN	30483.1	94	PK 100/11/5,00-H DG	10021.4	70
PFBZ 4551/2/3,81-KD GN	14000.1	91	PFBZ 4951/13/5,08-KD GN	30423.1	94	PK 100/11/5,00-H GN	10021.1	70
PFBZ 4551/2/7,62-FKD GN	30762.1	96	PFBZ 4951/14/5,08-FKD GN	30484.1	94	PK 100/11/5,00-H-BL DG	10065.4	71
PFBZ 4551/2/7,62-KD GN	30752.1	96	PFBZ 4951/14/5,08-KD GN	30424.1	94	PK 100/11/5,00-H-BL GN	10065.1	71
PFBZ 4551/3/3,81-FKD GN	14016.1	91	PFBZ 4951/15/5,08-FKD GN	30485.1	94	PK 100/11/5,00-V DG	10010.4	70
PFBZ 4551/3/3,81-KD GN	14001.1	91	PFBZ 4951/15/5,08-KD GN	30425.1	94	PK 100/11/5,00-V GN	10010.1	70
PFBZ 4551/3/7,62-FKD GN	30763.1	96	PFBZ 4951/16/5,08-FKD GN	30486.1	94	PK 100/11/5,00-V-BL DG	10054.4	71
PFBZ 4551/3/7,62-KD GN	30753.1	96	PFBZ 4951/16/5,08-KD GN	30426.1	94	PK 100/11/5,00-V-BL GN	10054.1	71
PFBZ 4551/4/3,81-FKD GN	14017.1	91	PFBZ 4951/17/5,08-FKD GN	30487.1	94	PK 100/12/10,00-H GN	10044.1	80
PFBZ 4551/4/3,81-KD GN	14002.1	91	PFBZ 4951/17/5,08-KD GN	30427.1	94	PK 100/12/10,00-V DG	10033.4	79
PFBZ 4551/4/7,62-FKD GN	30764.1	96	PFBZ 4951/18/5,08-FKD GN	30488.1	94	PK 100/12/10,00-V GN	10033.1	79
PFBZ 4551/4/7,62-KD GN	30754.1	96	PFBZ 4951/18/5,08-KD GN	30428.1	94	PK 100/12/5,00-H DG	10022.4	70
PFBZ 4551/5/3,81-FKD GN	14018.1	91	PFBZ 4951/19/5,08-FKD GN	30489.1	94	PK 100/12/5,00-H GN	10022.1	70
PFBZ 4551/5/3,81-KD GN	14003.1	91	PFBZ 4951/19/5,08-KD GN	30429.1	94	PK 100/12/5,00-H-BL DG	10066.4	71
PFBZ 4551/5/7,62-FKD GN	30765.1	96	PFBZ 4951/2/5,08-FKD GN	30472.1	94	PK 100/12/5,00-H-BL GN	10066.1	71
PFBZ 4551/5/7,62-KD GN	30755.1	96	PFBZ 4951/2/5,08-KD GN	30412.1	94	PK 100/12/5,00-V DG	10011.4	70
PFBZ 4551/6/3,81-FKD GN	14019.1	91	PFBZ 4951/20/5,08-FKD GN	30490.1	94	PK 100/12/5,00-V GN	10011.1	70
PFBZ 4551/6/3,81-KD GN	14004.1	91	PFBZ 4951/20/5,08-KD GN	30430.1	94	PK 100/12/5,00-V-BL DG	10055.4	71

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PK 100/12/5,00-V-BL GN	10055.1	71	PK 100/19/5,00-V DG	12391.4	70	PK 100/3/10,00-V DG	10024.4	79
PK 100/13/10,00-H GN	13509.1	80	PK 100/19/5,00-V GN	12391.1	70	PK 100/3/10,00-V GN	10024.1	79
PK 100/13/10,00-V DG	13497.4	79	PK 100/19/5,00-V-BL DG	12427.4	71	PK 100/3/5,00-H DG	10013.4	70
PK 100/13/10,00-V GN	13497.1	79	PK 100/19/5,00-V-BL GN	12427.1	71	PK 100/3/5,00-H GN	10013.1	70
PK 100/13/5,00-H DG	12373.4	70	PK 100/2/10,00-H GN	10034.1	80	PK 100/3/5,00-H-BL DG	10057.4	71
PK 100/13/5,00-H GN	12373.1	70	PK 100/2/10,00-V DG	10023.4	79	PK 100/3/5,00-H-BL GN	10057.1	71
PK 100/13/5,00-H-BL DG	12433.4	71	PK 100/2/10,00-V GN	10023.1	79	PK 100/3/5,00-V DG	10002.4	70
PK 100/13/5,00-H-BL GN	12433.1	71	PK 100/2/5,00-H DG	10012.4	70	PK 100/3/5,00-V GN	10002.1	70
PK 100/13/5,00-V DG	12385.4	70	PK 100/2/5,00-H GN	10012.1	70	PK 100/3/5,00-V-BL DG	10046.4	71
PK 100/13/5,00-V GN	12385.1	70	PK 100/2/5,00-H-BL DG	10056.4	71	PK 100/3/5,00-V-BL GN	10046.1	71
PK 100/13/5,00-V-BL DG	12421.4	71	PK 100/2/5,00-H-BL GN	10056.1	71	PK 100/4/10,00-H GN	10036.1	80
PK 100/13/5,00-V-BL GN	12421.1	71	PK 100/2/5,00-V DG	10001.4	70	PK 100/4/10,00-V DG	10025.4	79
PK 100/14/10,00-H GN	13510.1	80	PK 100/2/5,00-V GN	10001.1	70	PK 100/4/10,00-V GN	10025.1	79
PK 100/14/10,00-V DG	13498.4	79	PK 100/2/5,00-V-BL DG	10045.4	71	PK 100/4/5,00-H DG	10014.4	70
PK 100/14/10,00-V GN	13498.1	79	PK 100/2/5,00-V-BL GN	10045.1	71	PK 100/4/5,00-H GN	10014.1	70
PK 100/14/5,00-H DG	12374.4	70	PK 100/2/5,00-H-BL DG	13516.4	80	PK 100/4/5,00-H-BL DG	10058.4	71
PK 100/14/5,00-H GN	12374.1	70	PK 100/20/10,00-H GN	13516.1	80	PK 100/4/5,00-H-BL GN	10058.1	71
PK 100/14/5,00-H-BL DG	12434.4	71	PK 100/20/10,00-V DG	13504.4	79	PK 100/4/5,00-V DG	10003.4	70
PK 100/14/5,00-H-BL GN	12434.1	71	PK 100/20/10,00-V GN	13504.1	79	PK 100/4/5,00-V GN	10003.1	70
PK 100/14/5,00-V DG	12386.4	70	PK 100/20/5,00-H DG	12380.4	70	PK 100/4/5,00-V-BL DG	10047.4	71
PK 100/14/5,00-V GN	12386.1	70	PK 100/20/5,00-H GN	12380.1	70	PK 100/4/5,00-V-BL GN	10047.1	71
PK 100/14/5,00-V-BL DG	12422.4	71	PK 100/20/5,00-H-BL DG	12440.4	71	PK 100/5/10,00-H GN	10037.1	80
PK 100/14/5,00-V-BL GN	12422.1	71	PK 100/20/5,00-H-BL GN	12440.1	71	PK 100/5/10,00-V DG	10026.4	79
PK 100/15/10,00-H GN	13511.1	80	PK 100/20/5,00-V DG	12392.4	70	PK 100/5/10,00-V GN	10026.1	79
PK 100/15/10,00-V DG	13499.4	79	PK 100/20/5,00-V GN	12392.1	70	PK 100/5/5,00-H DG	10015.4	70
PK 100/15/10,00-V GN	13499.1	79	PK 100/20/5,00-V-BL DG	12428.4	71	PK 100/5/5,00-H GN	10015.1	70
PK 100/15/5,00-H DG	12375.4	70	PK 100/20/5,00-V-BL GN	12428.1	71	PK 100/5/5,00-H-BL DG	10059.4	71
PK 100/15/5,00-H GN	12375.1	70	PK 100/21/10,00-H DG	13517.4	80	PK 100/5/5,00-H-BL GN	10059.1	71
PK 100/15/5,00-H-BL DG	12435.4	71	PK 100/21/10,00-H GN	13517.1	80	PK 100/5/5,00-V DG	10004.4	70
PK 100/15/5,00-H-BL GN	12435.1	71	PK 100/21/10,00-V DG	13505.4	79	PK 100/5/5,00-V GN	10004.1	70
PK 100/15/5,00-V DG	12387.4	70	PK 100/21/10,00-V GN	13505.1	79	PK 100/5/5,00-V-BL DG	10048.4	71
PK 100/15/5,00-V GN	12387.1	70	PK 100/21/5,00-H DG	12381.4	70	PK 100/5/5,00-V-BL GN	10048.1	71
PK 100/15/5,00-V-BL DG	12423.4	71	PK 100/21/5,00-H GN	12381.1	70	PK 100/6/10,00-H GN	10038.1	80
PK 100/15/5,00-V-BL GN	12423.1	71	PK 100/21/5,00-H-BL DG	12441.4	71	PK 100/6/10,00-V DG	10027.4	79
PK 100/16/10,00-H GN	13512.1	80	PK 100/21/5,00-H-BL GN	12441.1	71	PK 100/6/10,00-V GN	10027.1	79
PK 100/16/10,00-V DG	13500.4	79	PK 100/21/5,00-V DG	12393.4	70	PK 100/6/5,00-H DG	10016.4	70
PK 100/16/10,00-V GN	13500.1	79	PK 100/21/5,00-V GN	12393.1	70	PK 100/6/5,00-H GN	10016.1	70
PK 100/16/5,00-H DG	12376.4	70	PK 100/21/5,00-V-BL DG	12429.4	71	PK 100/6/5,00-H-BL DG	10060.4	71
PK 100/16/5,00-H GN	12376.1	70	PK 100/21/5,00-V-BL GN	12429.1	71	PK 100/6/5,00-H-BL GN	10060.1	71
PK 100/16/5,00-H-BL DG	12436.4	71	PK 100/22/10,00-H DG	13518.4	80	PK 100/6/5,00-V DG	10005.4	70
PK 100/16/5,00-H-BL GN	12436.1	71	PK 100/22/10,00-H GN	13518.1	80	PK 100/6/5,00-V GN	10005.1	70
PK 100/16/5,00-V DG	12388.4	70	PK 100/22/10,00-V DG	13506.4	79	PK 100/6/5,00-V-BL DG	10049.4	71
PK 100/16/5,00-V GN	12388.1	70	PK 100/22/10,00-V GN	13506.1	79	PK 100/6/5,00-V-BL GN	10049.1	71
PK 100/16/5,00-V-BL DG	12424.4	71	PK 100/22/5,00-H DG	12382.4	70	PK 100/7/10,00-H GN	10039.1	80
PK 100/16/5,00-V-BL GN	12424.1	71	PK 100/22/5,00-H GN	12382.1	70	PK 100/7/10,00-V DG	10028.4	79
PK 100/17/10,00-H GN	13513.1	80	PK 100/22/5,00-H-BL DG	12442.4	71	PK 100/7/10,00-V GN	10028.1	79
PK 100/17/10,00-V DG	13501.4	79	PK 100/22/5,00-H-BL GN	12442.1	71	PK 100/7/5,00-H DG	10017.4	70
PK 100/17/10,00-V GN	13501.1	79	PK 100/22/5,00-V DG	12394.4	70	PK 100/7/5,00-H GN	10017.1	70
PK 100/17/5,00-H DG	12377.4	70	PK 100/22/5,00-V GN	12394.1	70	PK 100/7/5,00-H-BL DG	10061.4	71
PK 100/17/5,00-H GN	12377.1	70	PK 100/22/5,00-V-BL DG	12430.4	71	PK 100/7/5,00-H-BL GN	10061.1	71
PK 100/17/5,00-H-BL DG	12437.4	71	PK 100/22/5,00-V-BL GN	12430.1	71	PK 100/7/5,00-V DG	10006.4	70
PK 100/17/5,00-H-BL GN	12437.1	71	PK 100/23/10,00-H DG	13519.4	80	PK 100/7/5,00-V GN	10006.1	70
PK 100/17/5,00-V DG	12389.4	70	PK 100/23/10,00-H GN	13519.1	80	PK 100/7/5,00-V-BL DG	10050.4	71
PK 100/17/5,00-V GN	12389.1	70	PK 100/23/10,00-V DG	13507.4	79	PK 100/7/5,00-V-BL GN	10050.1	71
PK 100/17/5,00-V-BL DG	12425.4	71	PK 100/23/10,00-V GN	13507.1	79	PK 100/8/10,00-H GN	10040.1	80
PK 100/17/5,00-V-BL GN	12425.1	71	PK 100/23/5,00-H DG	12383.4	70	PK 100/8/10,00-V DG	10029.4	79
PK 100/18/10,00-H DG	13514.4	80	PK 100/23/5,00-H GN	12383.1	70	PK 100/8/10,00-V GN	10029.1	79
PK 100/18/10,00-H GN	13514.1	80	PK 100/23/5,00-H-BL DG	12443.4	71	PK 100/8/5,00-H DG	10018.4	70
PK 100/18/10,00-V DG	13502.4	79	PK 100/23/5,00-H-BL GN	12443.1	71	PK 100/8/5,00-H GN	10018.1	70
PK 100/18/10,00-V GN	13502.1	79	PK 100/23/5,00-V DG	12395.4	70	PK 100/8/5,00-H-BL DG	10062.4	71
PK 100/18/5,00-H DG	12378.4	70	PK 100/23/5,00-V GN	12395.1	70	PK 100/8/5,00-H-BL GN	10062.1	71
PK 100/18/5,00-H GN	12378.1	70	PK 100/23/5,00-V-BL DG	12431.4	71	PK 100/8/5,00-V DG	10007.4	70
PK 100/18/5,00-H-BL DG	12438.4	71	PK 100/23/5,00-V-BL GN	12431.1	71	PK 100/8/5,00-V GN	10007.1	70
PK 100/18/5,00-H-BL GN	12438.1	71	PK 100/24/10,00-H DG	13520.4	80	PK 100/8/5,00-V-BL DG	10051.4	71
PK 100/18/5,00-V DG	12390.4	70	PK 100/24/10,00-H GN	13520.1	80	PK 100/8/5,00-V-BL GN	10051.1	71
PK 100/18/5,00-V GN	12390.1	70	PK 100/24/10,00-V DG	13508.4	79	PK 100/9/10,00-H GN	10041.1	80
PK 100/18/5,00-V-BL DG	12426.4	71	PK 100/24/10,00-V GN	13508.1	79	PK 100/9/10,00-V DG	10030.4	79
PK 100/18/5,00-V-BL GN	12426.1	71	PK 100/24/5,00-H DG	12384.4	70	PK 100/9/10,00-V GN	10030.1	79
PK 100/19/10,00-H DG	13515.4	80	PK 100/24/5,00-H GN	12384.1	70	PK 100/9/5,00-H DG	10019.4	70
PK 100/19/10,00-H GN	13515.1	80	PK 100/24/5,00-H-BL DG	12444.4	71	PK 100/9/5,00-H GN	10019.1	70
PK 100/19/10,00-V DG	13503.4	79	PK 100/24/5,00-H-BL GN	12444.1	71	PK 100/9/5,00-H-BL DG	10063.4	71
PK 100/19/10,00-V GN	13503.1	79	PK 100/24/5,00-V DG	12396.4	70	PK 100/9/5,00-H-BL GN	10063.1	71
PK 100/19/5,00-H DG	12379.4	70	PK 100/24/5,00-V GN	12396.1	70	PK 100/9/5,00-V DG	10008.4	70
PK 100/19/5,00-H GN	12379.1	70	PK 100/24/5,00-V-BL DG	12432.4	71	PK 100/9/5,00-V GN	10008.1	70
PK 100/19/5,00-H-BL DG	12439.4	71	PK 100/24/5,00-V-BL GN	12432.1	71	PK 100/9/5,00-V-BL DG	10052.4	71
PK 100/19/5,00-H-BL GN	12439.1	71	PK 100/3/10,00-H GN	10035.1	80	PK 100/9/5,00-V-BL GN	10052.1	71

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PK 104/10/5,00-V DG	10085.4	72	PK 110/17/7,50-V DG	12461.4	76	PK 114/17/7,50-V DG	12449.4	77
PK 104/10/5,00-V GN	10085.1	72	PK 110/17/7,50-V GN	12461.1	76	PK 114/17/7,50-V GN	12449.1	77
PK 104/11/5,00-V DG	10086.4	72	PK 110/18/7,50-H DG	12474.4	76	PK 114/18/7,50-V DG	12450.4	77
PK 104/11/5,00-V GN	10086.1	72	PK 110/18/7,50-H GN	12474.1	76	PK 114/18/7,50-V GN	12450.1	77
PK 104/12/5,00-V DG	10087.4	72	PK 110/18/7,50-V DG	12462.4	76	PK 114/19/7,50-V DG	12451.4	77
PK 104/12/5,00-V GN	10087.1	72	PK 110/18/7,50-V GN	12462.1	76	PK 114/19/7,50-V GN	12451.1	77
PK 104/13/5,00-V DG	12397.4	72	PK 110/19/7,50-H DG	12475.4	76	PK 114/2/7,50-V DG	10088.4	77
PK 104/13/5,00-V GN	12397.1	72	PK 110/19/7,50-H GN	12475.1	76	PK 114/2/7,50-V GN	10088.1	77
PK 104/14/5,00-V DG	12398.4	72	PK 110/19/7,50-V DG	12463.4	76	PK 114/20/7,50-V DG	12452.4	77
PK 104/14/5,00-V GN	12398.1	72	PK 110/19/7,50-V GN	12463.1	76	PK 114/20/7,50-V GN	12452.1	77
PK 104/15/5,00-V DG	12399.4	72	PK 110/2/7,50-H DG	10110.4	76	PK 114/21/7,50-V DG	12453.4	77
PK 104/15/5,00-V GN	12399.1	72	PK 110/2/7,50-H GN	10110.1	76	PK 114/21/7,50-V GN	12453.1	77
PK 104/16/5,00-V DG	12400.4	72	PK 110/2/7,50-V DG	10099.4	76	PK 114/22/7,50-V DG	12454.4	77
PK 104/16/5,00-V GN	12400.1	72	PK 110/2/7,50-V GN	10099.1	76	PK 114/22/7,50-V GN	12454.1	77
PK 104/17/5,00-V DG	12401.4	72	PK 110/20/7,50-H DG	12476.4	76	PK 114/23/7,50-V DG	12455.4	77
PK 104/17/5,00-V GN	12401.1	72	PK 110/20/7,50-H GN	12476.1	76	PK 114/23/7,50-V GN	12455.1	77
PK 104/18/5,00-V DG	12402.4	72	PK 110/20/7,50-V DG	12464.4	76	PK 114/24/7,50-V DG	12456.4	77
PK 104/18/5,00-V GN	12402.1	72	PK 110/20/7,50-V GN	12464.1	76	PK 114/24/7,50-V GN	12456.1	77
PK 104/19/5,00-V DG	12403.4	72	PK 110/21/7,50-H DG	12477.4	76	PK 114/3/7,50-V DG	10089.4	77
PK 104/19/5,00-V GN	12403.1	72	PK 110/21/7,50-H GN	12477.1	76	PK 114/3/7,50-V GN	10089.1	77
PK 104/2/5,00-V DG	10077.4	72	PK 110/21/7,50-V DG	12465.4	76	PK 114/4/7,50-V DG	10090.4	77
PK 104/2/5,00-V GN	10077.1	72	PK 110/21/7,50-V GN	12465.1	76	PK 114/4/7,50-V GN	10090.1	77
PK 104/20/5,00-V DG	12404.4	72	PK 110/22/7,50-H DG	12478.4	76	PK 114/5/7,50-V DG	10091.4	77
PK 104/20/5,00-V GN	12404.1	72	PK 110/22/7,50-H GN	12478.1	76	PK 114/5/7,50-V GN	10091.1	77
PK 104/21/5,00-V DG	12405.4	72	PK 110/22/7,50-V DG	12466.4	76	PK 114/6/7,50-V DG	10092.4	77
PK 104/21/5,00-V GN	12405.1	72	PK 110/22/7,50-V GN	12466.1	76	PK 114/6/7,50-V GN	10092.1	77
PK 104/22/5,00-V DG	12406.4	72	PK 110/23/7,50-H DG	12479.4	76	PK 114/7/7,50-V DG	10093.4	77
PK 104/22/5,00-V GN	12406.1	72	PK 110/23/7,50-H GN	12479.1	76	PK 114/7/7,50-V GN	10093.1	77
PK 104/23/5,00-V DG	12407.4	72	PK 110/23/7,50-V DG	12467.4	76	PK 114/8/7,50-V DG	10094.4	77
PK 104/23/5,00-V GN	12407.1	72	PK 110/23/7,50-V GN	12467.1	76	PK 114/8/7,50-V GN	10094.1	77
PK 104/24/5,00-V DG	12408.4	72	PK 110/24/7,50-H DG	12480.4	76	PK 114/9/7,50-V DG	10095.4	77
PK 104/24/5,00-V GN	12408.1	72	PK 110/24/7,50-H GN	12480.1	76	PK 114/9/7,50-V GN	10095.1	77
PK 104/3/5,00-V DG	10078.4	72	PK 110/24/7,50-V DG	12468.4	76	PK 120/10/5,08-H DG	10140.4	74
PK 104/3/5,00-V GN	10078.1	72	PK 110/24/7,50-V GN	12468.1	76	PK 120/10/5,08-H GN	10140.1	74
PK 104/4/5,00-V DG	10079.4	72	PK 110/3/7,50-H DG	10111.4	76	PK 120/10/5,08-V DG	10129.4	74
PK 104/4/5,00-V GN	10079.1	72	PK 110/3/7,50-H GN	10111.1	76	PK 120/10/5,08-V GN	10129.1	74
PK 104/5/5,00-V DG	10080.4	72	PK 110/3/7,50-V DG	10100.4	76	PK 120/11/5,08-H DG	10141.4	74
PK 104/5/5,00-V GN	10080.1	72	PK 110/3/7,50-V GN	10100.1	76	PK 120/11/5,08-H GN	10141.1	74
PK 104/6/5,00-V DG	10081.4	72	PK 110/4/7,50-H DG	10112.4	76	PK 120/11/5,08-V DG	10130.4	74
PK 104/6/5,00-V GN	10081.1	72	PK 110/4/7,50-H GN	10112.1	76	PK 120/11/5,08-V GN	10130.1	74
PK 104/7/5,00-V DG	10082.4	72	PK 110/4/7,50-V DG	10101.4	76	PK 120/12/5,08-H DG	10142.4	74
PK 104/7/5,00-V GN	10082.1	72	PK 110/4/7,50-V GN	10101.1	76	PK 120/12/5,08-H GN	10142.1	74
PK 104/8/5,00-V DG	10083.4	72	PK 110/5/7,50-H DG	10113.4	76	PK 120/12/5,08-V DG	10131.4	74
PK 104/8/5,00-V GN	10083.1	72	PK 110/5/7,50-H GN	10113.1	76	PK 120/12/5,08-V GN	10131.1	74
PK 104/9/5,00-V DG	10084.4	72	PK 110/5/7,50-V DG	10102.4	76	PK 120/13/5,08-H DG	12481.4	74
PK 104/9/5,00-V GN	10084.1	72	PK 110/5/7,50-V GN	10102.1	76	PK 120/13/5,08-H GN	12481.1	74
PK 110/10/7,50-H DG	10118.4	76	PK 110/6/7,50-H DG	10114.4	76	PK 120/13/5,08-V DG	12409.4	74
PK 110/10/7,50-H GN	10118.1	76	PK 110/6/7,50-H GN	10114.1	76	PK 120/13/5,08-V GN	12409.1	74
PK 110/10/7,50-V DG	10107.4	76	PK 110/6/7,50-V DG	10103.4	76	PK 120/14/5,08-H DG	12482.4	74
PK 110/10/7,50-V GN	10107.1	76	PK 110/6/7,50-V GN	10103.1	76	PK 120/14/5,08-H GN	12482.1	74
PK 110/11/7,50-H DG	10119.4	76	PK 110/7/7,50-H DG	10115.4	76	PK 120/14/5,08-V DG	12410.4	74
PK 110/11/7,50-H GN	10119.1	76	PK 110/7/7,50-H GN	10115.1	76	PK 120/14/5,08-V GN	12410.1	74
PK 110/11/7,50-V DG	10108.4	76	PK 110/7/7,50-V DG	10104.4	76	PK 120/15/5,08-H DG	12483.4	74
PK 110/11/7,50-V GN	10108.1	76	PK 110/7/7,50-V GN	10104.1	76	PK 120/15/5,08-H GN	12483.1	74
PK 110/12/7,50-H DG	10120.4	76	PK 110/8/7,50-H DG	10116.4	76	PK 120/15/5,08-V DG	12411.4	74
PK 110/12/7,50-H GN	10120.1	76	PK 110/8/7,50-H GN	10116.1	76	PK 120/15/5,08-V GN	12411.1	74
PK 110/12/7,50-V DG	10109.4	76	PK 110/8/7,50-V DG	10105.4	76	PK 120/16/5,08-H DG	12484.4	74
PK 110/12/7,50-V GN	10109.1	76	PK 110/8/7,50-V GN	10105.1	76	PK 120/16/5,08-H GN	12484.1	74
PK 110/13/7,50-H DG	12469.4	76	PK 110/9/7,50-H DG	10117.4	76	PK 120/16/5,08-V DG	12412.4	74
PK 110/13/7,50-H GN	12469.1	76	PK 110/9/7,50-H GN	10117.1	76	PK 120/16/5,08-V GN	12412.1	74
PK 110/13/7,50-V DG	12457.4	76	PK 110/9/7,50-V DG	10106.4	76	PK 120/17/5,08-H DG	12485.4	74
PK 110/13/7,50-V GN	12457.1	76	PK 110/9/7,50-V GN	10106.1	76	PK 120/17/5,08-H GN	12485.1	74
PK 110/14/7,50-H DG	12470.4	76	PK 114/10/7,50-V DG	10096.4	77	PK 120/17/5,08-V DG	12413.4	74
PK 110/14/7,50-H GN	12470.1	76	PK 114/10/7,50-V GN	10096.1	77	PK 120/17/5,08-V GN	12413.1	74
PK 110/14/7,50-V DG	12458.4	76	PK 114/11/7,50-V DG	10097.4	77	PK 120/18/5,08-H DG	12486.4	74
PK 110/14/7,50-V GN	12458.1	76	PK 114/11/7,50-V GN	10097.1	77	PK 120/18/5,08-H GN	12486.1	74
PK 110/15/7,50-H DG	12471.4	76	PK 114/12/7,50-V DG	10098.4	77	PK 120/18/5,08-V DG	12414.4	74
PK 110/15/7,50-H GN	12471.1	76	PK 114/12/7,50-V GN	10098.1	77	PK 120/18/5,08-V GN	12414.1	74
PK 110/15/7,50-V DG	12459.4	76	PK 114/13/7,50-V DG	12445.4	77	PK 120/19/5,08-H DG	12487.4	74
PK 110/15/7,50-V GN	12459.1	76	PK 114/13/7,50-V GN	12445.1	77	PK 120/19/5,08-H GN	12487.1	74
PK 110/16/7,50-H DG	12472.4	76	PK 114/14/7,50-V DG	12446.4	77	PK 120/19/5,08-V DG	12415.4	74
PK 110/16/7,50-H GN	12472.1	76	PK 114/14/7,50-V GN	12446.1	77	PK 120/19/5,08-V GN	12415.1	74
PK 110/16/7,50-V DG	12460.4	76	PK 114/15/7,50-V DG	12447.4	77	PK 120/2/5,08-H DG	10132.4	74
PK 110/16/7,50-V GN	12460.1	76	PK 114/15/7,50-V GN	12447.1	77	PK 120/2/5,08-H GN	10132.1	74
PK 110/17/7,50-H DG	12473.4	76	PK 114/16/7,50-V DG	12448.4	77	PK 120/2/5,08-V DG	10121.4	74
PK 110/17/7,50-H GN	12473.1	76	PK 114/16/7,50-V GN	12448.1	77	PK 120/2/5,08-V GN	10121.1	74

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PK 120/20/5,08-H DG	12488.4	74	PK 2,5/13/7,50 GN	5063.1	55	PK 2,5/4/5,00 GN	5004.1	41
PK 120/20/5,08-H GN	12488.1	74	PK 2,5/13/7,50 OG	5063.3	55	PK 2,5/4/5,00 OG	5004.3	41
PK 120/20/5,08-V DG	12416.4	74	PK 2,5/13/7,62 GN	5083.1	56	PK 2,5/4/5,08 GN	5104.1	49
PK 120/20/5,08-V GN	12416.1	74	PK 2,5/13/7,62 OG	5083.3	56	PK 2,5/4/5,08 OG	5104.3	49
PK 120/21/5,08-H DG	12489.4	74	PK 2,5/14/5,00 GN	5014.1	41	PK 2,5/4/7,50 GN	5054.1	55
PK 120/21/5,08-H GN	12489.1	74	PK 2,5/14/5,00 OG	5014.3	41	PK 2,5/4/7,50 OG	5054.3	55
PK 120/21/5,08-V DG	12417.4	74	PK 2,5/14/5,08 GN	5114.1	49	PK 2,5/4/7,62 GN	5074.1	56
PK 120/21/5,08-V GN	12417.1	74	PK 2,5/14/5,08 OG	5114.3	49	PK 2,5/4/7,62 OG	5074.3	56
PK 120/22/5,08-H DG	12490.4	74	PK 2,5/14/7,50 GN	5064.1	55	PK 2,5/5/5,00 GN	5005.1	41
PK 120/22/5,08-H GN	12490.1	74	PK 2,5/14/7,50 OG	5064.3	55	PK 2,5/5/5,00 OG	5005.3	41
PK 120/22/5,08-V DG	12418.4	74	PK 2,5/14/7,62 GN	5084.1	56	PK 2,5/5/5,08 GN	5105.1	49
PK 120/22/5,08-V GN	12418.1	74	PK 2,5/14/7,62 OG	5084.3	56	PK 2,5/5/5,08 OG	5105.3	49
PK 120/23/5,08-H DG	12491.4	74	PK 2,5/15/5,00 GN	5015.1	41	PK 2,5/5/7,50 GN	5055.1	55
PK 120/23/5,08-H GN	12491.1	74	PK 2,5/15/5,00 OG	5015.3	41	PK 2,5/5/7,50 OG	5055.3	55
PK 120/23/5,08-V DG	12419.4	74	PK 2,5/15/5,08 GN	5115.1	49	PK 2,5/5/7,62 GN	5075.1	56
PK 120/23/5,08-V GN	12419.1	74	PK 2,5/15/5,08 OG	5115.3	49	PK 2,5/5/7,62 OG	5075.3	56
PK 120/24/5,08-H DG	12492.4	74	PK 2,5/15/7,50 GN	5065.1	55	PK 2,5/6/5,00 GN	5006.1	41
PK 120/24/5,08-H GN	12492.1	74	PK 2,5/15/7,50 OG	5065.3	55	PK 2,5/6/5,00 OG	5006.3	41
PK 120/24/5,08-V DG	12420.4	74	PK 2,5/15/7,62 GN	5085.1	56	PK 2,5/6/5,08 GN	5106.1	49
PK 120/24/5,08-V GN	12420.1	74	PK 2,5/15/7,62 OG	5085.3	56	PK 2,5/6/5,08 OG	5106.3	49
PK 120/3/5,08-H DG	10133.4	74	PK 2,5/16/5,00 GN	5016.1	41	PK 2,5/6/7,50 GN	5056.1	55
PK 120/3/5,08-H GN	10133.1	74	PK 2,5/16/5,00 OG	5016.3	41	PK 2,5/6/7,50 OG	5056.3	55
PK 120/3/5,08-V DG	10122.4	74	PK 2,5/16/5,08 GN	5116.1	49	PK 2,5/6/7,62 GN	5076.1	56
PK 120/3/5,08-V GN	10122.1	74	PK 2,5/16/5,08 OG	5116.3	49	PK 2,5/6/7,62 OG	5076.3	56
PK 120/4/5,08-H DG	10134.4	74	PK 2,5/16/7,50 GN	5066.1	55	PK 2,5/7/5,00 GN	5007.1	41
PK 120/4/5,08-H GN	10134.1	74	PK 2,5/16/7,50 OG	5066.3	55	PK 2,5/7/5,00 OG	5007.3	41
PK 120/4/5,08-V DG	10123.4	74	PK 2,5/16/7,62 GN	5086.1	56	PK 2,5/7/5,08 GN	5107.1	49
PK 120/4/5,08-V GN	10123.1	74	PK 2,5/16/7,62 OG	5086.3	56	PK 2,5/7/5,08 OG	5107.3	49
PK 120/5/5,08-H DG	10135.4	74	PK 2,5/17/5,00 GN	5017.1	41	PK 2,5/7/7,50 GN	5057.1	55
PK 120/5/5,08-H GN	10135.1	74	PK 2,5/17/5,00 OG	5017.3	41	PK 2,5/7/7,50 OG	5057.3	55
PK 120/5/5,08-V DG	10124.4	74	PK 2,5/17/5,08 GN	5117.1	49	PK 2,5/7/7,62 GN	5077.1	56
PK 120/5/5,08-V GN	10124.1	74	PK 2,5/17/5,08 OG	5117.3	49	PK 2,5/7/7,62 OG	5077.3	56
PK 120/6/5,08-H DG	10136.4	74	PK 2,5/18/5,00 GN	5018.1	41	PK 2,5/8/5,00 GN	5008.1	41
PK 120/6/5,08-H GN	10136.1	74	PK 2,5/18/5,00 OG	5018.3	41	PK 2,5/8/5,00 OG	5008.3	41
PK 120/6/5,08-V DG	10125.4	74	PK 2,5/18/5,08 GN	5118.1	49	PK 2,5/8/5,08 GN	5108.1	49
PK 120/6/5,08-V GN	10125.1	74	PK 2,5/18/5,08 OG	5118.3	49	PK 2,5/8/5,08 OG	5108.3	49
PK 120/7/5,08-H DG	10137.4	74	PK 2,5/19/5,00 GN	5019.1	41	PK 2,5/8/7,50 GN	5058.1	55
PK 120/7/5,08-H GN	10137.1	74	PK 2,5/19/5,00 OG	5019.3	41	PK 2,5/8/7,50 OG	5058.3	55
PK 120/7/5,08-V DG	10126.4	74	PK 2,5/19/5,08 GN	5119.1	49	PK 2,5/8/7,62 GN	5078.1	56
PK 120/7/5,08-V GN	10126.1	74	PK 2,5/19/5,08 OG	5119.3	49	PK 2,5/8/7,62 OG	5078.3	56
PK 120/8/5,08-H DG	10138.4	74	PK 2,5/2/5,00 GN	5002.1	41	PK 2,5/9/5,00 GN	5009.1	41
PK 120/8/5,08-H GN	10138.1	74	PK 2,5/2/5,00 OG	5002.3	41	PK 2,5/9/5,00 OG	5009.3	41
PK 120/8/5,08-V DG	10127.4	74	PK 2,5/2/5,08 GN	5102.1	49	PK 2,5/9/5,08 GN	5109.1	49
PK 120/8/5,08-V GN	10127.1	74	PK 2,5/2/5,08 OG	5102.3	49	PK 2,5/9/5,08 OG	5109.3	49
PK 120/9/5,08-H DG	10139.4	74	PK 2,5/2/7,50 GN	5052.1	55	PK 2,5/9/7,50 GN	5059.1	55
PK 120/9/5,08-H GN	10139.1	74	PK 2,5/2/7,50 OG	5052.3	55	PK 2,5/9/7,50 OG	5059.3	55
PK 120/9/5,08-V DG	10128.4	74	PK 2,5/2/7,62 GN	5072.1	56	PK 2,5/9/7,62 GN	5079.1	56
PK 120/9/5,08-V GN	10128.1	74	PK 2,5/2/7,62 OG	5072.3	56	PK 2,5/9/7,62 OG	5079.3	56
PK 2,5/10/5,00 GN	5010.1	41	PK 2,5/20/5,00 GN	5020.1	41	PK 250/10/10,16-V GN	10310.1	59
PK 2,5/10/5,00 OG	5010.3	41	PK 2,5/20/5,00 OG	5020.3	41	PK 250/10/5,08-V DG	10299.4	48
PK 2,5/10/5,08 GN	5110.1	49	PK 2,5/20/5,08 GN	5120.1	49	PK 250/10/5,08-V GN	10299.1	48
PK 2,5/10/5,08 OG	5110.3	49	PK 2,5/20/5,08 OG	5120.3	49	PK 250/11/10,16-V GN	10311.1	59
PK 2,5/10/7,50 GN	5060.1	55	PK 2,5/21/5,00 GN	5021.1	41	PK 250/11/5,08-V DG	10300.4	48
PK 2,5/10/7,50 OG	5060.3	55	PK 2,5/21/5,00 OG	5021.3	41	PK 250/11/5,08-V GN	10300.1	48
PK 2,5/10/7,62 GN	5080.1	56	PK 2,5/21/5,08 GN	5121.1	49	PK 250/12/10,16-V GN	10312.1	59
PK 2,5/10/7,62 OG	5080.3	56	PK 2,5/21/5,08 OG	5121.3	49	PK 250/12/5,08-V DG	10301.4	48
PK 2,5/11/5,00 GN	5011.1	41	PK 2,5/22/5,00 GN	5022.1	41	PK 250/12/5,08-V GN	10301.1	48
PK 2,5/11/5,00 OG	5011.3	41	PK 2,5/22/5,00 OG	5022.3	41	PK 250/13/10,16-V GN	13569.1	59
PK 2,5/11/5,08 GN	5111.1	49	PK 2,5/22/5,08 GN	5122.1	49	PK 250/13/5,08-V DG	12541.4	48
PK 2,5/11/5,08 OG	5111.3	49	PK 2,5/22/5,08 OG	5122.3	49	PK 250/13/5,08-V GN	12541.1	48
PK 2,5/11/7,50 GN	5061.1	55	PK 2,5/23/5,00 GN	5023.1	41	PK 250/14/10,16-V GN	13570.1	59
PK 2,5/11/7,50 OG	5061.3	55	PK 2,5/23/5,00 OG	5023.3	41	PK 250/14/5,08-V DG	12542.4	48
PK 2,5/11/7,62 GN	5081.1	56	PK 2,5/23/5,08 GN	5123.1	49	PK 250/14/5,08-V GN	12542.1	48
PK 2,5/11/7,62 OG	5081.3	56	PK 2,5/23/5,08 OG	5123.3	49	PK 250/15/10,16-V GN	13571.1	59
PK 2,5/12/5,00 GN	5012.1	41	PK 2,5/24/5,00 GN	5024.1	41	PK 250/15/5,08-V DG	12543.4	48
PK 2,5/12/5,00 OG	5012.3	41	PK 2,5/24/5,00 OG	5024.3	41	PK 250/15/5,08-V GN	12543.1	48
PK 2,5/12/5,08 GN	5112.1	49	PK 2,5/24/5,08 GN	5124.1	49	PK 250/16/10,16-V GN	13572.1	59
PK 2,5/12/5,08 OG	5112.3	49	PK 2,5/24/5,08 OG	5124.3	49	PK 250/16/5,08-V DG	12544.4	48
PK 2,5/12/7,50 GN	5062.1	55	PK 2,5/3/5,00 GN	5003.1	41	PK 250/16/5,08-V GN	12544.1	48
PK 2,5/12/7,50 OG	5062.3	55	PK 2,5/3/5,00 OG	5003.3	41	PK 250/17/10,16-V GN	13573.1	59
PK 2,5/12/7,62 GN	5082.1	56	PK 2,5/3/5,08 GN	5103.1	49	PK 250/17/5,08-V DG	12545.4	48
PK 2,5/12/7,62 OG	5082.3	56	PK 2,5/3/5,08 OG	5103.3	49	PK 250/17/5,08-V GN	12545.1	48
PK 2,5/13/5,00 GN	5013.1	41	PK 2,5/3/7,50 GN	5053.1	55	PK 250/18/10,16-V GN	13574.1	59
PK 2,5/13/5,00 OG	5013.3	41	PK 2,5/3/7,50 OG	5053.3	55	PK 250/18/5,08-V DG	12546.4	48
PK 2,5/13/5,08 GN	5113.1	49	PK 2,5/3/7,62 GN	5073.1	56	PK 250/18/5,08-V GN	12546.1	48
PK 2,5/13/5,08 OG	5113.3	49	PK 2,5/3/7,62 OG	5073.3	56	PK 250/19/10,16-V GN	13575.1	59

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PK 250/19/5,08-V DG	12547.4	48	PK 300/14/10,16 GN	13582.1	60	PK 300/23/10,00 GN	13555.1	58
PK 250/19/5,08-V GN	12547.1	48	PK 300/14/5,00 DG	12554.4	41	PK 300/23/10,16 DG	13591.4	60
PK 250/2/10,16-V GN	10302.1	59	PK 300/14/5,00 GN	12554.1	41	PK 300/23/10,16 GN	13591.1	60
PK 250/2/5,08-V DG	10291.4	48	PK 300/14/5,08 DG	12566.4	48	PK 300/23/5,00 DG	12563.4	41
PK 250/2/5,08-V GN	10291.1	48	PK 300/14/5,08 GN	12566.1	48	PK 300/23/5,00 GN	12563.1	41
PK 250/20/10,16-V GN	13576.1	59	PK 300/15/10,00 DG	13547.4	58	PK 300/23/5,08 DG	12575.4	48
PK 250/20/5,08-V DG	12548.4	48	PK 300/15/10,00 GN	13547.1	58	PK 300/23/5,08 GN	12575.1	48
PK 250/20/5,08-V GN	12548.1	48	PK 300/15/10,16 DG	13583.4	60	PK 300/24/10,00 DG	13556.4	58
PK 250/21/10,16-V GN	13577.1	59	PK 300/15/10,16 GN	13583.1	60	PK 300/24/10,00 GN	13556.1	58
PK 250/21/5,08-V DG	12549.4	48	PK 300/15/5,00 DG	12555.4	41	PK 300/24/10,16 DG	13592.4	60
PK 250/21/5,08-V GN	12549.1	48	PK 300/15/5,00 GN	12555.1	41	PK 300/24/10,16 GN	13592.1	60
PK 250/22/10,16-V GN	13578.1	59	PK 300/15/5,08 DG	12567.4	48	PK 300/24/5,00 DG	12564.4	41
PK 250/22/5,08-V DG	12550.4	48	PK 300/15/5,08 GN	12567.1	48	PK 300/24/5,00 GN	12564.1	41
PK 250/22/5,08-V GN	12550.1	48	PK 300/16/10,00 DG	13548.4	58	PK 300/24/5,08 DG	12576.4	48
PK 250/23/10,16-V GN	13579.1	59	PK 300/16/10,00 GN	13548.1	58	PK 300/24/5,08 GN	12576.1	48
PK 250/23/5,08-V DG	12551.4	48	PK 300/16/10,16 DG	13584.4	60	PK 300/3/10,00 DG	10336.4	58
PK 250/23/5,08-V GN	12551.1	48	PK 300/16/10,16 GN	13584.1	60	PK 300/3/10,00 GN	10336.1	58
PK 250/24/10,16-V GN	13580.1	59	PK 300/16/5,00 GN	12556.1	41	PK 300/3/10,16 DG	10347.4	60
PK 250/24/5,08-V DG	12552.4	48	PK 300/16/5,08 DG	12568.4	48	PK 300/3/10,16 GN	10347.1	60
PK 250/24/5,08-V GN	12552.1	48	PK 300/16/5,08 GN	12568.1	48	PK 300/3/5,00 DG	10314.4	41
PK 250/3/10,16-V GN	10303.1	59	PK 300/17/10,00 GN	13549.1	58	PK 300/3/5,00 GN	10314.1	41
PK 250/3/5,08-V DG	10292.4	48	PK 300/17/10,16 DG	13585.4	60	PK 300/3/5,08 DG	10325.4	48
PK 250/3/5,08-V GN	10292.1	48	PK 300/17/10,16 GN	13585.1	60	PK 300/3/5,08 GN	10325.1	48
PK 250/4/10,16-V GN	10304.1	59	PK 300/17/5,00 DG	12557.4	41	PK 300/4/10,00 DG	10337.4	58
PK 250/4/5,08-V DG	10293.4	48	PK 300/17/5,00 GN	12557.1	41	PK 300/4/10,00 GN	10337.1	58
PK 250/4/5,08-V GN	10293.1	48	PK 300/17/5,08 DG	12569.4	48	PK 300/4/10,16 DG	10348.4	60
PK 250/5/10,16-V GN	10305.1	59	PK 300/17/5,08 GN	12569.1	48	PK 300/4/10,16 GN	10348.1	60
PK 250/5/5,08-V DG	10294.4	48	PK 300/18/10,00 DG	13550.4	58	PK 300/4/5,00 DG	10315.4	41
PK 250/5/5,08-V GN	10294.1	48	PK 300/18/10,00 GN	13550.1	58	PK 300/4/5,00 GN	10315.1	41
PK 250/6/10,16-V GN	10306.1	59	PK 300/18/10,16 DG	13586.4	60	PK 300/4/5,08 DG	10326.4	48
PK 250/6/5,08-V DG	10295.4	48	PK 300/18/10,16 GN	13586.1	60	PK 300/4/5,08 GN	10326.1	48
PK 250/6/5,08-V GN	10295.1	48	PK 300/18/5,00 DG	12558.4	41	PK 300/5/10,00 DG	10338.4	58
PK 250/7/10,16-V GN	10307.1	59	PK 300/18/5,00 GN	12558.1	41	PK 300/5/10,00 GN	10338.1	58
PK 250/7/5,08-V DG	10296.4	48	PK 300/18/5,08 DG	12570.4	48	PK 300/5/10,16 DG	10349.4	60
PK 250/7/5,08-V GN	10296.1	48	PK 300/18/5,08 GN	12570.1	48	PK 300/5/10,16 GN	10349.1	60
PK 250/8/10,16-V GN	10308.1	59	PK 300/19/10,00 DG	13551.4	58	PK 300/5/5,00 DG	10316.4	41
PK 250/8/5,08-V DG	10297.4	48	PK 300/19/10,00 GN	13551.1	58	PK 300/5/5,00 GN	10316.1	41
PK 250/8/5,08-V GN	10297.1	48	PK 300/19/10,16 DG	13587.4	60	PK 300/5/5,08 DG	10327.4	48
PK 250/9/10,16-V GN	10309.1	59	PK 300/19/10,16 GN	13587.1	60	PK 300/5/5,08 GN	10327.1	48
PK 250/9/5,08-V DG	10298.4	48	PK 300/19/5,00 DG	12559.4	41	PK 300/6/10,00 DG	10339.4	58
PK 250/9/5,08-V GN	10298.1	48	PK 300/19/5,00 GN	12559.1	41	PK 300/6/10,00 GN	10339.1	58
PK 300/10/10,00 DG	10343.4	58	PK 300/19/5,08 DG	12571.4	48	PK 300/6/10,16 DG	10350.4	60
PK 300/10/10,00 GN	10343.1	58	PK 300/19/5,08 GN	12571.1	48	PK 300/6/10,16 GN	10350.1	60
PK 300/10/10,16 DG	10354.4	60	PK 300/2/10,00 DG	10335.4	58	PK 300/6/5,00 DG	10317.4	41
PK 300/10/10,16 GN	10354.1	60	PK 300/2/10,00 GN	10335.1	58	PK 300/6/5,00 GN	10317.1	41
PK 300/10/5,00 DG	10321.4	41	PK 300/2/10,16 DG	10346.4	60	PK 300/6/5,08 DG	10328.4	48
PK 300/10/5,00 GN	10321.1	41	PK 300/2/10,16 GN	10346.1	60	PK 300/6/5,08 GN	10328.1	48
PK 300/10/5,08 DG	10332.4	48	PK 300/2/5,00 DG	10313.4	41	PK 300/7/10,00 DG	10340.4	58
PK 300/10/5,08 GN	10332.1	48	PK 300/2/5,00 GN	10313.1	41	PK 300/7/10,00 GN	10340.1	58
PK 300/11/10,00 DG	10344.4	58	PK 300/2/5,08 DG	10324.4	48	PK 300/7/10,16 DG	10351.4	60
PK 300/11/10,00 GN	10344.1	58	PK 300/2/5,08 GN	10324.1	48	PK 300/7/10,16 GN	10351.1	60
PK 300/11/10,16 DG	10355.4	60	PK 300/20/10,00 DG	13552.4	58	PK 300/7/5,00 DG	10318.4	41
PK 300/11/10,16 GN	10355.1	60	PK 300/20/10,00 GN	13552.1	58	PK 300/7/5,00 GN	10318.1	41
PK 300/11/5,00 DG	10322.4	41	PK 300/20/10,16 DG	13588.4	60	PK 300/7/5,08 DG	10329.4	48
PK 300/11/5,00 GN	10322.1	41	PK 300/20/10,16 GN	13588.1	60	PK 300/7/5,08 GN	10329.1	48
PK 300/11/5,08 DG	10333.4	48	PK 300/20/5,00 DG	12560.4	41	PK 300/8/10,00 DG	10341.4	58
PK 300/11/5,08 GN	10333.1	48	PK 300/20/5,00 GN	12560.1	41	PK 300/8/10,00 GN	10341.1	58
PK 300/12/10,00 DG	10345.4	58	PK 300/20/5,08 DG	12572.4	48	PK 300/8/10,16 DG	10352.4	60
PK 300/12/10,00 GN	10345.1	58	PK 300/20/5,08 GN	12572.1	48	PK 300/8/10,16 GN	10352.1	60
PK 300/12/10,16 DG	10356.4	60	PK 300/21/10,00 DG	13553.4	58	PK 300/8/5,00 DG	10319.4	41
PK 300/12/10,16 GN	10356.1	60	PK 300/21/10,00 GN	13553.1	58	PK 300/8/5,00 GN	10319.1	41
PK 300/12/5,00 DG	10323.4	41	PK 300/21/10,16 DG	13589.4	60	PK 300/8/5,08 DG	10330.4	48
PK 300/12/5,00 GN	10323.1	41	PK 300/21/10,16 GN	13589.1	60	PK 300/8/5,08 GN	10330.1	48
PK 300/12/5,08 DG	10334.4	48	PK 300/21/5,00 DG	12561.4	41	PK 300/9/10,00 DG	10342.4	58
PK 300/12/5,08 GN	10334.1	48	PK 300/21/5,00 GN	12561.1	41	PK 300/9/10,00 GN	10342.1	58
PK 300/13/10,00 DG	13545.4	58	PK 300/21/5,08 DG	12573.4	48	PK 300/9/10,16 DG	10353.4	60
PK 300/13/10,00 GN	13545.1	58	PK 300/21/5,08 GN	12573.1	48	PK 300/9/10,16 GN	10353.1	60
PK 300/13/10,16 DG	13581.4	60	PK 300/22/10,00 DG	13554.4	58	PK 300/9/5,00 DG	10320.4	41
PK 300/13/10,16 GN	13581.1	60	PK 300/22/10,00 GN	13554.1	58	PK 300/9/5,00 GN	10320.1	41
PK 300/13/5,00 DG	12553.4	41	PK 300/22/10,16 DG	13590.4	60	PK 300/9/5,08 DG	10331.4	48
PK 300/13/5,00 GN	12553.1	41	PK 300/22/10,16 GN	13590.1	60	PK 300/9/5,08 GN	10331.1	48
PK 300/13/5,08 DG	12565.4	48	PK 300/22/5,00 DG	12562.4	41	PK 350/10/10,00-V GN	10387.1	58
PK 300/13/5,08 GN	12565.1	48	PK 300/22/5,00 GN	12562.1	41	PK 350/10/10,16-V GN	10398.1	59
PK 300/14/10,00 DG	13546.4	58	PK 300/22/5,08 DG	12574.4	48	PK 350/10/5,00-V GN	10365.1	42
PK 300/14/10,00 GN	13546.1	58	PK 300/22/5,08 GN	12574.1	48	PK 350/10/5,08-V GN	10376.1	49
PK 300/14/10,16 DG	13582.4	60	PK 300/23/10,00 DG	13555.4	58	PK 350/11/10,00-V GN	10388.1	58

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PK 350/11/10,16-V GN	10399.1	59	PK 350/6/5,00-V GN	10361.1	42	PK 360/24/7,50-V DG	12588.4	54
PK 350/11/5,00-V GN	10366.1	42	PK 350/6/5,08-V GN	10372.1	49	PK 360/24/7,50-V GN	12588.1	54
PK 350/11/5,08-V GN	10377.1	49	PK 350/7/10,00-V GN	10384.1	58	PK 360/3/7,50-H DG	13606.4	54
PK 350/12/10,00-V GN	10389.1	58	PK 350/7/10,16-V GN	10395.1	59	PK 360/3/7,50-H GN	13606.1	54
PK 350/12/10,16-V GN	10400.1	59	PK 350/7/5,00-V GN	10362.1	42	PK 360/3/7,50-V DG	10402.4	54
PK 350/12/5,00-V GN	10367.1	42	PK 350/7/5,08-V GN	10373.1	49	PK 360/3/7,50-V GN	10402.1	54
PK 350/12/5,08-V GN	10378.1	49	PK 350/8/10,00-V GN	10385.1	58	PK 360/4/7,50-H DG	13607.4	54
PK 350/13/10,00-V GN	13557.1	58	PK 350/8/10,16-V GN	10396.1	59	PK 360/4/7,50-H GN	13607.1	54
PK 350/13/10,16-V GN	13593.1	59	PK 350/8/5,00-V GN	10363.1	42	PK 360/4/7,50-V DG	10403.4	54
PK 350/13/5,00-V GN	12349.1	42	PK 350/8/5,08-V GN	10374.1	49	PK 360/4/7,50-V GN	10403.1	54
PK 350/13/5,08-V GN	12361.1	49	PK 350/9/10,00-V GN	10386.1	58	PK 360/5/7,50-H DG	13608.4	54
PK 350/14/10,00-V GN	13558.1	58	PK 350/9/10,16-V GN	10397.1	59	PK 360/5/7,50-H GN	13608.1	54
PK 350/14/10,16-V GN	13594.1	59	PK 350/9/5,00-V GN	10364.1	42	PK 360/5/7,50-V DG	10404.4	54
PK 350/14/5,00-V GN	12350.1	42	PK 350/9/5,08-V GN	10375.1	49	PK 360/5/7,50-V GN	10404.1	54
PK 350/14/5,08-V GN	12362.1	49	PK 360/10/7,50-H DG	13613.4	54	PK 360/6/7,50-H DG	13609.4	54
PK 350/15/10,00-V GN	13559.1	58	PK 360/10/7,50-H GN	13613.1	54	PK 360/6/7,50-H GN	13609.1	54
PK 350/15/10,16-V GN	13595.1	59	PK 360/10/7,50-V DG	10409.4	54	PK 360/6/7,50-V DG	10405.4	54
PK 350/15/5,00-V GN	12351.1	42	PK 360/10/7,50-V GN	10409.1	54	PK 360/6/7,50-V GN	10405.1	54
PK 350/15/5,08-V GN	12363.1	49	PK 360/11/7,50-H DG	13614.4	54	PK 360/7/7,50-H DG	13610.4	54
PK 350/16/10,00-V GN	13560.1	58	PK 360/11/7,50-H GN	13614.1	54	PK 360/7/7,50-H GN	13610.1	54
PK 350/16/10,16-V GN	13596.1	59	PK 360/11/7,50-V DG	10410.4	54	PK 360/7/7,50-V DG	10406.4	54
PK 350/16/5,00-V GN	12352.1	42	PK 360/11/7,50-V GN	10410.1	54	PK 360/7/7,50-V GN	10406.1	54
PK 350/16/5,08-V GN	12364.1	49	PK 360/12/7,50-H DG	13615.4	54	PK 360/8/7,50-H DG	13611.4	54
PK 350/17/10,00-V GN	13561.1	58	PK 360/12/7,50-H GN	13615.1	54	PK 360/8/7,50-H GN	13611.1	54
PK 350/17/10,16-V GN	13597.1	59	PK 360/12/7,50-V DG	10411.4	54	PK 360/8/7,50-V DG	10407.4	54
PK 350/17/5,00-V GN	12353.1	42	PK 360/12/7,50-V GN	10411.1	54	PK 360/8/7,50-V GN	10407.1	54
PK 350/17/5,08-V GN	12365.1	49	PK 360/13/7,50-H DG	13616.4	54	PK 360/9/7,50-H DG	13612.4	54
PK 350/18/10,00-V GN	13562.1	58	PK 360/13/7,50-H GN	13616.1	54	PK 360/9/7,50-H GN	13612.1	54
PK 350/18/10,16-V GN	13598.1	59	PK 360/13/7,50-V DG	12577.4	54	PK 360/9/7,50-V DG	10408.4	54
PK 350/18/5,00-V GN	12354.1	42	PK 360/13/7,50-V GN	12577.1	54	PK 360/9/7,50-V GN	10408.1	54
PK 350/18/5,08-V GN	12366.1	49	PK 360/14/7,50-H DG	13617.4	54	PK 500/10/10,00-H DG	10217.4	78
PK 350/19/10,00-V GN	13563.1	58	PK 360/14/7,50-H GN	13617.1	54	PK 500/10/10,00-H GN	10217.1	78
PK 350/19/10,16-V GN	13599.1	59	PK 360/14/7,50-V DG	12578.4	54	PK 500/10/10,00-V DG	10195.4	78
PK 350/19/5,00-V GN	12355.1	42	PK 360/14/7,50-V GN	12578.1	54	PK 500/10/10,00-V GN	10195.1	78
PK 350/19/5,08-V GN	12367.1	49	PK 360/15/7,50-H DG	13618.4	54	PK 500/10/10,16-H DG	10228.4	82
PK 350/2/10,00-V GN	10379.1	58	PK 360/15/7,50-H GN	13618.1	54	PK 500/10/10,16-H GN	10228.1	82
PK 350/2/10,16-V GN	10390.1	59	PK 360/15/7,50-V DG	12579.4	54	PK 500/10/10,16-V DG	10206.4	82
PK 350/2/5,0-V-BR GN	31492.1	42	PK 360/15/7,50-V GN	12579.1	54	PK 500/10/10,16-V GN	10206.1	82
PK 350/2/5,00-V GN	10357.1	42	PK 360/16/7,50-H DG	13619.4	54	PK 500/10/5,00-H DG	10173.4	67
PK 350/2/5,08-V GN	10368.1	49	PK 360/16/7,50-H GN	13619.1	54	PK 500/10/5,00-H GN	10173.1	67
PK 350/20/10,00-V GN	13564.1	58	PK 360/16/7,50-V DG	12580.4	54	PK 500/10/5,00-H-BL GN	10721.1	68
PK 350/20/10,16-V GN	13600.1	59	PK 360/16/7,50-V GN	12580.1	54	PK 500/10/5,00-V DG	10151.4	67
PK 350/20/5,00-V GN	12356.1	42	PK 360/17/7,50-H DG	13620.4	54	PK 500/10/5,00-V GN	10151.1	67
PK 350/20/5,08-V GN	12368.1	49	PK 360/17/7,50-H GN	13620.1	54	PK 500/10/5,00-V-BL DG	10239.4	68
PK 350/21/10,00-V GN	13565.1	58	PK 360/17/7,50-V DG	12581.4	54	PK 500/10/5,00-V-BL GN	10239.1	68
PK 350/21/10,16-V GN	13601.1	59	PK 360/17/7,50-V GN	12581.1	54	PK 500/10/5,08-H DG	10184.4	73
PK 350/21/5,00-V GN	12357.1	42	PK 360/18/7,50-H DG	13621.4	54	PK 500/10/5,08-H GN	10184.1	73
PK 350/21/5,08-V GN	12369.1	49	PK 360/18/7,50-H GN	13621.1	54	PK 500/10/5,08-V DG	10162.4	73
PK 350/22/10,00-V GN	13566.1	58	PK 360/18/7,50-V DG	12582.4	54	PK 500/10/5,08-V GN	10162.1	73
PK 350/22/10,16-V GN	13602.1	59	PK 360/18/7,50-V GN	12582.1	54	PK 500/11/10,00-H DG	10218.4	78
PK 350/22/5,00-V GN	12358.1	42	PK 360/19/7,50-H DG	13622.4	54	PK 500/11/10,00-H GN	10218.1	78
PK 350/22/5,08-V GN	12370.1	49	PK 360/19/7,50-H GN	13622.1	54	PK 500/11/10,00-V DG	10196.4	78
PK 350/23/10,00-V GN	13567.1	58	PK 360/19/7,50-V DG	12583.4	54	PK 500/11/10,00-V GN	10196.1	78
PK 350/23/10,16-V GN	13603.1	59	PK 360/19/7,50-V GN	12583.1	54	PK 500/11/10,16-H DG	10229.4	82
PK 350/23/5,00-V GN	12359.1	42	PK 360/2/7,50-H DG	13605.4	54	PK 500/11/10,16-H GN	10229.1	82
PK 350/23/5,08-V GN	12371.1	49	PK 360/2/7,50-H GN	13605.1	54	PK 500/11/10,16-V DG	10207.4	82
PK 350/24/10,00-V GN	13568.1	58	PK 360/2/7,50-V DG	10401.4	54	PK 500/11/10,16-V GN	10207.1	82
PK 350/24/10,16-V GN	13604.1	59	PK 360/2/7,50-V GN	10401.1	54	PK 500/11/5,00-H DG	10174.4	67
PK 350/24/5,00-V GN	12360.1	42	PK 360/20/7,50-H DG	13623.4	54	PK 500/11/5,00-H GN	10174.1	67
PK 350/24/5,08-V GN	12372.1	49	PK 360/20/7,50-H GN	13623.1	54	PK 500/11/5,00-H-BL GN	10722.1	68
PK 350/3/10,00-V GN	10380.1	58	PK 360/20/7,50-V DG	12584.4	54	PK 500/11/5,00-V DG	10152.4	67
PK 350/3/10,16-V GN	10391.1	59	PK 360/20/7,50-V GN	12584.1	54	PK 500/11/5,00-V GN	10152.1	67
PK 350/3/5,0-V-BR GN	31493.1	42	PK 360/21/7,50-H DG	13624.4	54	PK 500/11/5,00-V-BL DG	10240.4	68
PK 350/3/5,00-V GN	10358.1	42	PK 360/21/7,50-H GN	13624.1	54	PK 500/11/5,00-V-BL GN	10240.1	68
PK 350/3/5,08-V GN	10369.1	49	PK 360/21/7,50-V DG	12585.4	54	PK 500/11/5,08-H DG	10185.4	73
PK 350/4/10,00-V GN	10381.1	58	PK 360/21/7,50-V GN	12585.1	54	PK 500/11/5,08-H GN	10185.1	73
PK 350/4/10,16-V GN	10392.1	59	PK 360/22/7,50-H DG	13625.4	54	PK 500/11/5,08-V DG	10163.4	73
PK 350/4/5,0-V-BR GN	31494.1	42	PK 360/22/7,50-H GN	13625.1	54	PK 500/11/5,08-V GN	10163.1	73
PK 350/4/5,00-V GN	10359.1	42	PK 360/22/7,50-V DG	12586.4	54	PK 500/12/10,00-H DG	10219.4	78
PK 350/4/5,08-V GN	10370.1	49	PK 360/22/7,50-V GN	12586.1	54	PK 500/12/10,00-H GN	10219.1	78
PK 350/5/10,00-V GN	10382.1	58	PK 360/23/7,50-H DG	13626.4	54	PK 500/12/10,00-V DG	10197.4	78
PK 350/5/10,16-V GN	10393.1	59	PK 360/23/7,50-H GN	13626.1	54	PK 500/12/10,00-V GN	10197.1	78
PK 350/5/5,00-V GN	10360.1	42	PK 360/23/7,50-V DG	12587.4	54	PK 500/12/10,16-H DG	10230.4	82
PK 350/5/5,08-V GN	10371.1	49	PK 360/23/7,50-V GN	12587.1	54	PK 500/12/10,16-H GN	10230.1	82
PK 350/6/10,00-V GN	10383.1	58	PK 360/24/7,50-H DG	13627.4	54	PK 500/12/10,16-V DG	10208.4	82
PK 350/6/10,16-V GN	10394.1	59	PK 360/24/7,50-H GN	13627.1	54	PK 500/12/10,16-V GN	10208.1	82

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PK 500/12/5,00-H DG	10175.4	67	PK 500/17/10,00-H GN	13489.1	78	PK 500/20/5,00-H DG	12524.4	67
PK 500/12/5,00-H GN	10175.1	67	PK 500/17/10,00-V DG	13477.4	78	PK 500/20/5,00-H GN	12524.1	67
PK 500/12/5,00-H-BL GN	10723.1	68	PK 500/17/10,00-V GN	13477.1	78	PK 500/20/5,00-V DG	12500.4	67
PK 500/12/5,00-V DG	10153.4	67	PK 500/17/10,16-H DG	13537.4	82	PK 500/20/5,00-V GN	12500.1	67
PK 500/12/5,00-V GN	10153.1	67	PK 500/17/10,16-H GN	13537.1	82	PK 500/20/5,08-H DG	12536.4	73
PK 500/12/5,00-V-BL DG	10241.4	68	PK 500/17/10,16-V DG	13525.4	82	PK 500/20/5,08-H GN	12536.1	73
PK 500/12/5,00-V-BL GN	10241.1	68	PK 500/17/10,16-V GN	13525.1	82	PK 500/20/5,08-V DG	12512.4	73
PK 500/12/5,08-H DG	10186.4	73	PK 500/17/5,00-H DG	12521.4	67	PK 500/20/5,08-V GN	12512.1	73
PK 500/12/5,08-H GN	10186.1	73	PK 500/17/5,00-H GN	12521.1	67	PK 500/21/10,00-H DG	13493.4	78
PK 500/12/5,08-V DG	10164.4	73	PK 500/17/5,00-V DG	12497.4	67	PK 500/21/10,00-H GN	13493.1	78
PK 500/12/5,08-V GN	10164.1	73	PK 500/17/5,00-V GN	12497.1	67	PK 500/21/10,00-V DG	13481.4	78
PK 500/13/10,00-H DG	13485.4	78	PK 500/17/5,08-H DG	12533.4	73	PK 500/21/10,00-V GN	13481.1	78
PK 500/13/10,00-H GN	13485.1	78	PK 500/17/5,08-H GN	12533.1	73	PK 500/21/10,16-H DG	13541.4	82
PK 500/13/10,00-V DG	13473.4	78	PK 500/17/5,08-V DG	12509.4	73	PK 500/21/10,16-H GN	13541.1	82
PK 500/13/10,00-V GN	13473.1	78	PK 500/17/5,08-V GN	12509.1	73	PK 500/21/10,16-V DG	13529.4	82
PK 500/13/10,16-H DG	13533.4	82	PK 500/18/10,00-H DG	13490.4	78	PK 500/21/10,16-V GN	13529.1	82
PK 500/13/10,16-H GN	13533.1	82	PK 500/18/10,00-H GN	13490.1	78	PK 500/21/5,00-H DG	12525.4	67
PK 500/13/10,16-V DG	13521.4	82	PK 500/18/10,00-V DG	13478.4	78	PK 500/21/5,00-H GN	12525.1	67
PK 500/13/10,16-V GN	13521.1	82	PK 500/18/10,00-V GN	13478.1	78	PK 500/21/5,00-V DG	12501.4	67
PK 500/13/5,00-H DG	12517.4	67	PK 500/18/10,16-H DG	13538.4	82	PK 500/21/5,00-V GN	12501.1	67
PK 500/13/5,00-H GN	12517.1	67	PK 500/18/10,16-H GN	13538.1	82	PK 500/21/5,08-H DG	12537.4	73
PK 500/13/5,00-V DG	12493.4	67	PK 500/18/10,16-V DG	13526.4	82	PK 500/21/5,08-H GN	12537.1	73
PK 500/13/5,00-V GN	12493.1	67	PK 500/18/10,16-V GN	13526.1	82	PK 500/21/5,08-V DG	12513.4	73
PK 500/13/5,08-H DG	12529.4	73	PK 500/18/5,00-H DG	12522.4	67	PK 500/21/5,08-V GN	12513.1	73
PK 500/13/5,08-H GN	12529.1	73	PK 500/18/5,00-H GN	12522.1	67	PK 500/22/10,00-H DG	13494.4	78
PK 500/13/5,08-V DG	12505.4	73	PK 500/18/5,00-V DG	12498.4	67	PK 500/22/10,00-H GN	13494.1	78
PK 500/13/5,08-V GN	12505.1	73	PK 500/18/5,00-V GN	12498.1	67	PK 500/22/10,00-V DG	13482.4	78
PK 500/14/10,00-H DG	13486.4	78	PK 500/18/5,08-H DG	12534.4	73	PK 500/22/10,00-V GN	13482.1	78
PK 500/14/10,00-H GN	13486.1	78	PK 500/18/5,08-H GN	12534.1	73	PK 500/22/10,16-H DG	13542.4	82
PK 500/14/10,00-V DG	13474.4	78	PK 500/18/5,08-V DG	12510.4	73	PK 500/22/10,16-H GN	13542.1	82
PK 500/14/10,00-V GN	13474.1	78	PK 500/18/5,08-V GN	12510.1	73	PK 500/22/10,16-V DG	13530.4	82
PK 500/14/10,16-H DG	13534.4	82	PK 500/19/10,00-H DG	13491.4	78	PK 500/22/10,16-V GN	13530.1	82
PK 500/14/10,16-H GN	13534.1	82	PK 500/19/10,00-H GN	13491.1	78	PK 500/22/5,00-H DG	12526.4	67
PK 500/14/10,16-V DG	13522.4	82	PK 500/19/10,00-V DG	13479.4	78	PK 500/22/5,00-H GN	12526.1	67
PK 500/14/10,16-V GN	13522.1	82	PK 500/19/10,00-V GN	13479.1	78	PK 500/22/5,00-V DG	12502.4	67
PK 500/14/5,00-H DG	12518.4	67	PK 500/19/10,16-H DG	13539.4	82	PK 500/22/5,00-V GN	12502.1	67
PK 500/14/5,00-H GN	12518.1	67	PK 500/19/10,16-H GN	13539.1	82	PK 500/22/5,08-H DG	12538.4	73
PK 500/14/5,00-V DG	12494.4	67	PK 500/19/10,16-V DG	13527.4	82	PK 500/22/5,08-H GN	12538.1	73
PK 500/14/5,00-V GN	12494.1	67	PK 500/19/10,16-V GN	13527.1	82	PK 500/22/5,08-V DG	12514.4	73
PK 500/14/5,08-H DG	12530.4	73	PK 500/19/5,00-H DG	12523.4	67	PK 500/22/5,08-V GN	12514.1	73
PK 500/14/5,08-H GN	12530.1	73	PK 500/19/5,00-H GN	12523.1	67	PK 500/23/10,00-H DG	13495.4	78
PK 500/14/5,08-V DG	12506.4	73	PK 500/19/5,00-V DG	12499.4	67	PK 500/23/10,00-H GN	13495.1	78
PK 500/14/5,08-V GN	12506.1	73	PK 500/19/5,00-V GN	12499.1	67	PK 500/23/10,00-V DG	13483.4	78
PK 500/15/10,00-H DG	13487.4	78	PK 500/19/5,08-H DG	12535.4	73	PK 500/23/10,00-V GN	13483.1	78
PK 500/15/10,00-H GN	13487.1	78	PK 500/19/5,08-H GN	12535.1	73	PK 500/23/10,16-H DG	13543.4	82
PK 500/15/10,00-V DG	13475.4	78	PK 500/19/5,08-V DG	12511.4	73	PK 500/23/10,16-H GN	13543.1	82
PK 500/15/10,00-V GN	13475.1	78	PK 500/19/5,08-V GN	12511.1	73	PK 500/23/10,16-V DG	13531.4	82
PK 500/15/10,16-H DG	13535.4	82	PK 500/2/10,00-H DG	10209.4	78	PK 500/23/10,16-V GN	13531.1	82
PK 500/15/10,16-H GN	13535.1	82	PK 500/2/10,00-H GN	10209.1	78	PK 500/23/5,00-H DG	12527.4	67
PK 500/15/10,16-V DG	13523.4	82	PK 500/2/10,00-V DG	10187.4	78	PK 500/23/5,00-H GN	12527.1	67
PK 500/15/10,16-V GN	13523.1	82	PK 500/2/10,00-V GN	10187.1	78	PK 500/23/5,00-V DG	12503.4	67
PK 500/15/5,00-H DG	12519.4	67	PK 500/2/10,00-V-BL DG	10242.4	79	PK 500/23/5,00-V GN	12503.1	67
PK 500/15/5,00-H GN	12519.1	67	PK 500/2/10,00-V-BL GN	10242.1	79	PK 500/23/5,08-H DG	12539.4	73
PK 500/15/5,00-V DG	12495.4	67	PK 500/2/10,16-H DG	10220.4	82	PK 500/23/5,08-H GN	12539.1	73
PK 500/15/5,00-V GN	12495.1	67	PK 500/2/10,16-H GN	10220.1	82	PK 500/23/5,08-V DG	12515.4	73
PK 500/15/5,08-H DG	12531.4	73	PK 500/2/10,16-V DG	10198.4	82	PK 500/23/5,08-V GN	12515.1	73
PK 500/15/5,08-H GN	12531.1	73	PK 500/2/10,16-V GN	10198.1	82	PK 500/24/10,00-H DG	13496.4	78
PK 500/15/5,08-V DG	12507.4	73	PK 500/2/5,00-H DG	10165.4	67	PK 500/24/10,00-H GN	13496.1	78
PK 500/15/5,08-V GN	12507.1	73	PK 500/2/5,00-H GN	10165.1	67	PK 500/24/10,00-V DG	13484.4	78
PK 500/16/10,00-H DG	13488.4	78	PK 500/2/5,00-H-BL GN	10713.1	68	PK 500/24/10,00-V GN	13484.1	78
PK 500/16/10,00-H GN	13488.1	78	PK 500/2/5,00-V DG	10143.4	67	PK 500/24/10,16-H DG	13544.4	82
PK 500/16/10,00-V DG	13476.4	78	PK 500/2/5,00-V GN	10143.1	67	PK 500/24/10,16-H GN	13544.1	82
PK 500/16/10,00-V GN	13476.1	78	PK 500/2/5,00-V-BL DG	10231.4	68	PK 500/24/10,16-V DG	13532.4	82
PK 500/16/10,16-H DG	13536.4	82	PK 500/2/5,00-V-BL GN	10231.1	68	PK 500/24/10,16-V GN	13532.1	82
PK 500/16/10,16-H GN	13536.1	82	PK 500/2/5,08-H DG	10176.4	73	PK 500/24/5,00-H DG	12528.4	67
PK 500/16/10,16-V DG	13524.4	82	PK 500/2/5,08-H GN	10176.1	73	PK 500/24/5,00-H GN	12528.1	67
PK 500/16/10,16-V GN	13524.1	82	PK 500/2/5,08-V DG	10154.4	73	PK 500/24/5,00-V DG	12504.4	67
PK 500/16/5,00-H DG	12520.4	67	PK 500/2/5,08-V GN	10154.1	73	PK 500/24/5,00-V GN	12504.1	67
PK 500/16/5,00-H GN	12520.1	67	PK 500/20/10,00-H DG	13492.4	78	PK 500/24/5,08-H DG	12540.4	73
PK 500/16/5,00-V DG	12496.4	67	PK 500/20/10,00-H GN	13492.1	78	PK 500/24/5,08-H GN	12540.1	73
PK 500/16/5,00-V GN	12496.1	67	PK 500/20/10,00-V DG	13480.4	78	PK 500/24/5,08-V DG	12516.4	73
PK 500/16/5,08-H DG	12532.4	73	PK 500/20/10,00-V GN	13480.1	78	PK 500/24/5,08-V GN	12516.1	73
PK 500/16/5,08-H GN	12532.1	73	PK 500/20/10,16-H DG	13540.4	82	PK 500/3/10,00-H DG	10210.4	78
PK 500/16/5,08-V DG	12508.4	73	PK 500/20/10,16-H GN	13540.1	82	PK 500/3/10,00-H GN	10210.1	78
PK 500/16/5,08-V GN	12508.1	73	PK 500/20/10,16-V DG	13528.4	82	PK 500/3/10,00-V DG	10188.4	78
PK 500/17/10,00-H DG	13489.4	78	PK 500/20/10,16-V GN	13528.1	82	PK 500/3/10,00-V GN	10188.1	78

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PK 500/3/10,00-V-BL DG	10243.4	79	PK 500/6/5,08-H DG	10180.4	73	PK 550/13/3,50-V GN	10258.1	66
PK 500/3/10,00-V-BL GN	10243.1	79	PK 500/6/5,08-H GN	10180.1	73	PK 550/14/3,50-H DG	10274.4	66
PK 500/3/10,16-H DG	10221.4	82	PK 500/6/5,08-V DG	10158.4	73	PK 550/14/3,50-H GN	10274.1	66
PK 500/3/10,16-H GN	10221.1	82	PK 500/6/5,08-V GN	10158.1	73	PK 550/14/3,50-V DG	10259.4	66
PK 500/3/10,16-V DG	10199.4	82	PK 500/7/10,00-H DG	10214.4	78	PK 550/14/3,50-V GN	10259.1	66
PK 500/3/10,16-V GN	10199.1	82	PK 500/7/10,00-H GN	10214.1	78	PK 550/15/3,50-H DG	10275.4	66
PK 500/3/5,00-H DG	10166.4	67	PK 500/7/10,00-V DG	10192.4	78	PK 550/15/3,50-H GN	10275.1	66
PK 500/3/5,00-H GN	10166.1	67	PK 500/7/10,00-V GN	10192.1	78	PK 550/15/3,50-V DG	10260.4	66
PK 500/3/5,00-H-BL GN	10714.1	68	PK 500/7/10,16-H DG	10225.4	82	PK 550/15/3,50-V GN	10260.1	66
PK 500/3/5,00-V DG	10144.4	67	PK 500/7/10,16-H GN	10225.1	82	PK 550/16/3,50-H DG	10276.4	66
PK 500/3/5,00-V GN	10144.1	67	PK 500/7/10,16-V DG	10203.4	82	PK 550/16/3,50-H GN	10276.1	66
PK 500/3/5,00-V-BL DG	10232.4	68	PK 500/7/10,16-V GN	10203.1	82	PK 550/16/3,50-V DG	10261.4	66
PK 500/3/5,00-V-BL GN	10232.1	68	PK 500/7/5,00-H DG	10170.4	67	PK 550/16/3,50-V GN	10261.1	66
PK 500/3/5,08-H DG	10177.4	73	PK 500/7/5,00-H GN	10170.1	67	PK 550/2/3,50-H DG	10262.4	66
PK 500/3/5,08-H GN	10177.1	73	PK 500/7/5,00-H-BL GN	10718.1	68	PK 550/2/3,50-H GN	10262.1	66
PK 500/3/5,08-V DG	10155.4	73	PK 500/7/5,00-V DG	10148.4	67	PK 550/2/3,50-V DG	10247.4	66
PK 500/3/5,08-V GN	10155.1	73	PK 500/7/5,00-V GN	10148.1	67	PK 550/2/3,50-V GN	10247.1	66
PK 500/4/10,00-H DG	10211.4	78	PK 500/7/5,00-V-BL DG	10236.4	68	PK 550/2/7,00-H DG	10284.4	75
PK 500/4/10,00-H GN	10211.1	78	PK 500/7/5,00-V-BL GN	10236.1	68	PK 550/2/7,00-H GN	10284.1	75
PK 500/4/10,00-V DG	10189.4	78	PK 500/7/5,08-H DG	10181.4	73	PK 550/2/7,00-V DG	10277.4	75
PK 500/4/10,00-V GN	10189.1	78	PK 500/7/5,08-H GN	10181.1	73	PK 550/2/7,00-V GN	10277.1	75
PK 500/4/10,00-V-BL DG	10244.4	79	PK 500/7/5,08-V DG	10159.4	73	PK 550/3/3,50-H DG	10263.4	66
PK 500/4/10,00-V-BL GN	10244.1	79	PK 500/7/5,08-V GN	10159.1	73	PK 550/3/3,50-H GN	10263.1	66
PK 500/4/10,16-H DG	10222.4	82	PK 500/8/10,00-H DG	10215.4	78	PK 550/3/3,50-V DG	10248.4	66
PK 500/4/10,16-H GN	10222.1	82	PK 500/8/10,00-H GN	10215.1	78	PK 550/3/3,50-V GN	10248.1	66
PK 500/4/10,16-V DG	10200.4	82	PK 500/8/10,00-V DG	10193.4	78	PK 550/3/7,00-H DG	10285.4	75
PK 500/4/10,16-V GN	10200.1	82	PK 500/8/10,00-V GN	10193.1	78	PK 550/3/7,00-H GN	10285.1	75
PK 500/4/5,00-H DG	10167.4	67	PK 500/8/10,16-H DG	10226.4	82	PK 550/3/7,00-V DG	10278.4	75
PK 500/4/5,00-H GN	10167.1	67	PK 500/8/10,16-H GN	10226.1	82	PK 550/3/7,00-V GN	10278.1	75
PK 500/4/5,00-H-BL GN	10715.1	68	PK 500/8/10,16-V DG	10204.4	82	PK 550/4/3,50-H DG	10264.4	66
PK 500/4/5,00-V DG	10145.4	67	PK 500/8/10,16-V GN	10204.1	82	PK 550/4/3,50-H GN	10264.1	66
PK 500/4/5,00-V GN	10145.1	67	PK 500/8/5,00-H DG	10171.4	67	PK 550/4/3,50-V DG	10249.4	66
PK 500/4/5,00-V-BL DG	10233.4	68	PK 500/8/5,00-H GN	10171.1	67	PK 550/4/3,50-V GN	10249.1	66
PK 500/4/5,00-V-BL GN	10233.1	68	PK 500/8/5,00-H-BL GN	10719.1	68	PK 550/4/7,00-H DG	10286.4	75
PK 500/4/5,08-H DG	10178.4	73	PK 500/8/5,00-V DG	10149.4	67	PK 550/4/7,00-H GN	10286.1	75
PK 500/4/5,08-H GN	10178.1	73	PK 500/8/5,00-V GN	10149.1	67	PK 550/4/7,00-V DG	10279.4	75
PK 500/4/5,08-V DG	10156.4	73	PK 500/8/5,00-V-BL DG	10237.4	68	PK 550/4/7,00-V GN	10279.1	75
PK 500/4/5,08-V GN	10156.1	73	PK 500/8/5,00-V-BL GN	10237.1	68	PK 550/5/3,50-H DG	10265.4	66
PK 500/5/10,00-H DG	10212.4	78	PK 500/8/5,08-H DG	10182.4	73	PK 550/5/3,50-H GN	10265.1	66
PK 500/5/10,00-H GN	10212.1	78	PK 500/8/5,08-H GN	10182.1	73	PK 550/5/3,50-V DG	10250.4	66
PK 500/5/10,00-V DG	10190.4	78	PK 500/8/5,08-V DG	10160.4	73	PK 550/5/3,50-V GN	10250.1	66
PK 500/5/10,00-V GN	10190.1	78	PK 500/8/5,08-V GN	10160.1	73	PK 550/5/7,00-H DG	10287.4	75
PK 500/5/10,00-V-BL DG	10245.4	79	PK 500/9/10,00-H DG	10216.4	78	PK 550/5/7,00-H GN	10287.1	75
PK 500/5/10,00-V-BL GN	10245.1	79	PK 500/9/10,00-H GN	10216.1	78	PK 550/5/7,00-V DG	10280.4	75
PK 500/5/10,16-H DG	10223.4	82	PK 500/9/10,00-V DG	10194.4	78	PK 550/5/7,00-V GN	10280.1	75
PK 500/5/10,16-H GN	10223.1	82	PK 500/9/10,00-V GN	10194.1	78	PK 550/6/3,50-H DG	10266.4	66
PK 500/5/10,16-V DG	10201.4	82	PK 500/9/10,16-H DG	10227.4	82	PK 550/6/3,50-H GN	10266.1	66
PK 500/5/10,16-V GN	10201.1	82	PK 500/9/10,16-H GN	10227.1	82	PK 550/6/3,50-V DG	10251.4	66
PK 500/5/5,00-H DG	10168.4	67	PK 500/9/10,16-V DG	10205.4	82	PK 550/6/3,50-V GN	10251.1	66
PK 500/5/5,00-H GN	10168.1	67	PK 500/9/10,16-V GN	10205.1	82	PK 550/6/7,00-H DG	10288.4	75
PK 500/5/5,00-H-BL GN	10716.1	68	PK 500/9/5,00-H DG	10172.4	67	PK 550/6/7,00-H GN	10288.1	75
PK 500/5/5,00-V DG	10146.4	67	PK 500/9/5,00-H GN	10172.1	67	PK 550/6/7,00-V DG	10281.4	75
PK 500/5/5,00-V GN	10146.1	67	PK 500/9/5,00-H-BL GN	10720.1	68	PK 550/6/7,00-V GN	10281.1	75
PK 500/5/5,00-V-BL DG	10234.4	68	PK 500/9/5,00-V DG	10150.4	67	PK 550/7/3,50-H DG	10267.4	66
PK 500/5/5,00-V-BL GN	10234.1	68	PK 500/9/5,00-V GN	10150.1	67	PK 550/7/3,50-H GN	10267.1	66
PK 500/5/5,08-H DG	10179.4	73	PK 500/9/5,00-V-BL DG	10238.4	68	PK 550/7/3,50-V DG	10252.4	66
PK 500/5/5,08-H GN	10179.1	73	PK 500/9/5,00-V-BL GN	10238.1	68	PK 550/7/3,50-V GN	10252.1	66
PK 500/5/5,08-V DG	10157.4	73	PK 500/9/5,08-H DG	10183.4	73	PK 550/7/7,00-H DG	10289.4	75
PK 500/5/5,08-V GN	10157.1	73	PK 500/9/5,08-H GN	10183.1	73	PK 550/7/7,00-H GN	10289.1	75
PK 500/6/10,00-H DG	10213.4	78	PK 500/9/5,08-V DG	10161.4	73	PK 550/7/7,00-V DG	10282.4	75
PK 500/6/10,00-H GN	10213.1	78	PK 500/9/5,08-V GN	10161.1	73	PK 550/7/7,00-V GN	10282.1	75
PK 500/6/10,00-V DG	10191.4	78	PK 550/10/3,50-H DG	10270.4	66	PK 550/8/3,50-H DG	10268.4	66
PK 500/6/10,00-V GN	10191.1	78	PK 550/10/3,50-H GN	10270.1	66	PK 550/8/3,50-H GN	10268.1	66
PK 500/6/10,00-V-BL DG	10246.4	79	PK 550/10/3,50-V DG	10255.4	66	PK 550/8/3,50-V DG	10253.4	66
PK 500/6/10,00-V-BL GN	10246.1	79	PK 550/10/3,50-V GN	10255.1	66	PK 550/8/3,50-V GN	10253.1	66
PK 500/6/10,16-H DG	10224.4	82	PK 550/11/3,50-H DG	10271.4	66	PK 550/8/7,00-H DG	10290.4	75
PK 500/6/10,16-H GN	10224.1	82	PK 550/11/3,50-H GN	10271.1	66	PK 550/8/7,00-H GN	10290.1	75
PK 500/6/10,16-V DG	10202.4	82	PK 550/11/3,50-V DG	10256.4	66	PK 550/8/7,00-V DG	10283.4	75
PK 500/6/10,16-V GN	10202.1	82	PK 550/11/3,50-V GN	10256.1	66	PK 550/8/7,00-V GN	10283.1	75
PK 500/6/5,00-H DG	10169.4	67	PK 550/12/3,50-H DG	10272.4	66	PK 550/9/3,50-H DG	10269.4	66
PK 500/6/5,00-H GN	10169.1	67	PK 550/12/3,50-H GN	10272.1	66	PK 550/9/3,50-H GN	10269.1	66
PK 500/6/5,00-H-BL GN	10717.1	68	PK 550/12/3,50-V DG	10257.4	66	PK 550/9/3,50-V DG	10254.4	66
PK 500/6/5,00-V DG	10147.4	67	PK 550/12/3,50-V GN	10257.1	66	PK 550/9/3,50-V GN	10254.1	66
PK 500/6/5,00-V GN	10147.1	67	PK 550/13/3,50-H DG	10273.4	66	PK 590/10/5,00 GN	12863.1	69
PK 500/6/5,00-V-BL DG	10235.4	68	PK 550/13/3,50-H GN	10273.1	66	PK 590/11/5,00 GN	12864.1	69
PK 500/6/5,00-V-BL GN	10235.1	68	PK 550/13/3,50-V DG	10258.4	66	PK 590/12/5,00 GN	12865.1	69

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PK 590/13/5,00 GN	12866.1	69	PK 700/14/5,00-H GN	12634.1	43	PK 700/22/5,08-H GN	12654.1	50
PK 590/14/5,00 GN	12867.1	69	PK 700/14/5,00-V DG	12610.4	43	PK 700/22/5,08-V DG	12630.4	50
PK 590/15/5,00 GN	12868.1	69	PK 700/14/5,00-V GN	12610.1	43	PK 700/22/5,08-V GN	12630.1	50
PK 590/16/5,00 GN	12869.1	69	PK 700/14/5,08-H DG	12646.4	50	PK 700/23/5,00-H DG	12643.4	43
PK 590/17/5,00 GN	12870.1	69	PK 700/14/5,08-H GN	12646.1	50	PK 700/23/5,00-H GN	12643.1	43
PK 590/18/5,00 GN	12871.1	69	PK 700/14/5,08-V DG	12622.4	50	PK 700/23/5,00-V DG	12619.4	43
PK 590/19/5,00 GN	12872.1	69	PK 700/14/5,08-V GN	12622.1	50	PK 700/23/5,00-V GN	12619.1	43
PK 590/2/5,00 GN	12855.1	69	PK 700/15/5,00-H DG	12635.4	43	PK 700/23/5,08-H DG	12655.4	50
PK 590/20/5,00 GN	12873.1	69	PK 700/15/5,00-H GN	12635.1	43	PK 700/23/5,08-H GN	12655.1	50
PK 590/21/5,00 GN	12874.1	69	PK 700/15/5,00-V DG	12611.4	43	PK 700/23/5,08-V DG	12631.4	50
PK 590/22/5,00 GN	12875.1	69	PK 700/15/5,00-V GN	12611.1	43	PK 700/23/5,08-V GN	12631.1	50
PK 590/23/5,00 GN	12876.1	69	PK 700/15/5,08-H DG	12647.4	50	PK 700/24/5,00-H DG	12644.4	43
PK 590/24/5,00 GN	12877.1	69	PK 700/15/5,08-H GN	12647.1	50	PK 700/24/5,00-H GN	12644.1	43
PK 590/3/5,00 GN	12856.1	69	PK 700/15/5,08-V DG	12623.4	50	PK 700/24/5,00-V DG	12620.4	43
PK 590/4/5,00 GN	12857.1	69	PK 700/15/5,08-V GN	12623.1	50	PK 700/24/5,00-V GN	12620.1	43
PK 590/5/5,00 GN	12858.1	69	PK 700/16/5,00-H DG	12636.4	43	PK 700/24/5,08-H DG	12656.4	50
PK 590/6/5,00 GN	12859.1	69	PK 700/16/5,00-H GN	12636.1	43	PK 700/24/5,08-H GN	12656.1	50
PK 590/7/5,00 GN	12860.1	69	PK 700/16/5,00-V DG	12612.4	43	PK 700/24/5,08-V DG	12632.4	50
PK 590/8/5,00 GN	12861.1	69	PK 700/16/5,00-V GN	12612.1	43	PK 700/24/5,08-V GN	12632.1	50
PK 590/9/5,00 GN	12862.1	69	PK 700/16/5,08-H DG	12648.4	50	PK 700/3/5,0-V-BR GN	31483.1	44
PK 601/10/3,50-V GN	14131.1	39	PK 700/16/5,08-H GN	12648.1	50	PK 700/3/5,00-H DG	10446.4	43
PK 601/11/3,50-V GN	14132.1	39	PK 700/16/5,08-V DG	12624.4	50	PK 700/3/5,00-H GN	10446.1	43
PK 601/12/3,50-V GN	14133.1	39	PK 700/16/5,08-V GN	12624.1	50	PK 700/3/5,00-V DG	10424.4	43
PK 601/13/3,50-V GN	14134.1	39	PK 700/17/5,00-H DG	12637.4	43	PK 700/3/5,00-V GN	10424.1	43
PK 601/14/3,50-V GN	14135.1	39	PK 700/17/5,00-H GN	12637.1	43	PK 700/3/5,08-H DG	10457.4	50
PK 601/15/3,50-V GN	14136.1	39	PK 700/17/5,00-V DG	12613.4	43	PK 700/3/5,08-H GN	10457.1	50
PK 601/16/3,50-V GN	14137.1	39	PK 700/17/5,00-V GN	12613.1	43	PK 700/3/5,08-V DG	10435.4	50
PK 601/17/3,50-V GN	14138.1	39	PK 700/17/5,08-H DG	12649.4	50	PK 700/3/5,08-V GN	10435.1	50
PK 601/18/3,50-V GN	14139.1	39	PK 700/17/5,08-H GN	12649.1	50	PK 700/4/5,00-H DG	10447.4	43
PK 601/19/3,50-V GN	14140.1	39	PK 700/17/5,08-V DG	12625.4	50	PK 700/4/5,00-H GN	10447.1	43
PK 601/2/3,50-V GN	14123.1	39	PK 700/17/5,08-V GN	12625.1	50	PK 700/4/5,00-V DG	10425.4	43
PK 601/20/3,50-V GN	14141.1	39	PK 700/18/5,00-H DG	12638.4	43	PK 700/4/5,00-V GN	10425.1	43
PK 601/21/3,50-V GN	14142.1	39	PK 700/18/5,00-H GN	12638.1	43	PK 700/4/5,08-H DG	10458.4	50
PK 601/22/3,50-V GN	14143.1	39	PK 700/18/5,00-V DG	12614.4	43	PK 700/4/5,08-H GN	10458.1	50
PK 601/23/3,50-V GN	14144.1	39	PK 700/18/5,00-V GN	12614.1	43	PK 700/4/5,08-V DG	10436.4	50
PK 601/24/3,50-V GN	14145.1	39	PK 700/18/5,08-H DG	12650.4	50	PK 700/4/5,08-V GN	10436.1	50
PK 601/3/3,50-V GN	14124.1	39	PK 700/18/5,08-H GN	12650.1	50	PK 700/5/5,00-H DG	10448.4	43
PK 601/4/3,50-V GN	14125.1	39	PK 700/18/5,08-V DG	12626.4	50	PK 700/5/5,00-H GN	10448.1	43
PK 601/5/3,50-V GN	14126.1	39	PK 700/18/5,08-V GN	12626.1	50	PK 700/5/5,00-V DG	10426.4	43
PK 601/6/3,50-V GN	14127.1	39	PK 700/19/5,00-H DG	12639.4	43	PK 700/5/5,00-V GN	10426.1	43
PK 601/7/3,50-V GN	14128.1	39	PK 700/19/5,00-H GN	12639.1	43	PK 700/5/5,08-H DG	10459.4	50
PK 601/8/3,50-V GN	14129.1	39	PK 700/19/5,00-V DG	12615.4	43	PK 700/5/5,08-H GN	10459.1	50
PK 601/9/3,50-V GN	14130.1	39	PK 700/19/5,00-V GN	12615.1	43	PK 700/5/5,08-V DG	10437.4	50
PK 700/10/5,00-H DG	10453.4	43	PK 700/19/5,08-H DG	12651.4	50	PK 700/5/5,08-V GN	10437.1	50
PK 700/10/5,00-H GN	10453.1	43	PK 700/19/5,08-H GN	12651.1	50	PK 700/6/5,00-H DG	10449.4	43
PK 700/10/5,00-V DG	10431.4	43	PK 700/19/5,08-V DG	12627.4	50	PK 700/6/5,00-H GN	10449.1	43
PK 700/10/5,00-V GN	10431.1	43	PK 700/19/5,08-V GN	12627.1	50	PK 700/6/5,00-V DG	10427.4	43
PK 700/10/5,08-H DG	10464.4	50	PK 700/2/5,00-H DG	10445.4	43	PK 700/6/5,00-V GN	10427.1	43
PK 700/10/5,08-H GN	10464.1	50	PK 700/2/5,00-H GN	10445.1	43	PK 700/6/5,08-H DG	10460.4	50
PK 700/10/5,08-V DG	10442.4	50	PK 700/2/5,00-V DG	10423.4	43	PK 700/6/5,08-H GN	10460.1	50
PK 700/10/5,08-V GN	10442.1	50	PK 700/2/5,00-V GN	10423.1	43	PK 700/6/5,08-V DG	10438.4	50
PK 700/11/5,00-H DG	10454.4	43	PK 700/2/5,08-H DG	10456.4	50	PK 700/6/5,08-V GN	10438.1	50
PK 700/11/5,00-H GN	10454.1	43	PK 700/2/5,08-H GN	10456.1	50	PK 700/7/5,00-H DG	10450.4	43
PK 700/11/5,00-V DG	10432.4	43	PK 700/2/5,08-V DG	10434.4	50	PK 700/7/5,00-H GN	10450.1	43
PK 700/11/5,00-V GN	10432.1	43	PK 700/2/5,08-V GN	10434.1	50	PK 700/7/5,00-V DG	10428.4	43
PK 700/11/5,08-H DG	10465.4	50	PK 700/2/5,00-H DG	12640.4	43	PK 700/7/5,00-V GN	10428.1	43
PK 700/11/5,08-H GN	10465.1	50	PK 700/20/5,00-H GN	12640.1	43	PK 700/7/5,08-H DG	10461.4	50
PK 700/11/5,08-V DG	10443.4	50	PK 700/20/5,00-V DG	12616.4	43	PK 700/7/5,08-H GN	10461.1	50
PK 700/11/5,08-V GN	10443.1	50	PK 700/20/5,00-V GN	12616.1	43	PK 700/7/5,08-V DG	10439.4	50
PK 700/12/5,00-H DG	10455.4	43	PK 700/20/5,08-H DG	12652.4	50	PK 700/7/5,08-V GN	10439.1	50
PK 700/12/5,00-H GN	10455.1	43	PK 700/20/5,08-H GN	12652.1	50	PK 700/8/5,00-H DG	10451.4	43
PK 700/12/5,00-V DG	10433.4	43	PK 700/20/5,08-V DG	12628.4	50	PK 700/8/5,00-H GN	10451.1	43
PK 700/12/5,00-V GN	10433.1	43	PK 700/20/5,08-V GN	12628.1	50	PK 700/8/5,00-V DG	10429.4	43
PK 700/12/5,08-H DG	10466.4	50	PK 700/21/5,00-H DG	12641.4	43	PK 700/8/5,00-V GN	10429.1	43
PK 700/12/5,08-H GN	10466.1	50	PK 700/21/5,00-H GN	12641.1	43	PK 700/8/5,08-H DG	10462.4	50
PK 700/12/5,08-V DG	10444.4	50	PK 700/21/5,00-V DG	12617.4	43	PK 700/8/5,08-H GN	10462.1	50
PK 700/12/5,08-V GN	10444.1	50	PK 700/21/5,00-V GN	12617.1	43	PK 700/8/5,08-V DG	10440.4	50
PK 700/13/5,00-H DG	12633.4	43	PK 700/21/5,08-H DG	12653.4	50	PK 700/8/5,08-V GN	10440.1	50
PK 700/13/5,00-H GN	12633.1	43	PK 700/21/5,08-H GN	12653.1	50	PK 700/9/5,00-H DG	10452.4	43
PK 700/13/5,00-V DG	12609.4	43	PK 700/21/5,08-V DG	12629.4	50	PK 700/9/5,00-H GN	10452.1	43
PK 700/13/5,00-V GN	12609.1	43	PK 700/21/5,08-V GN	12629.1	50	PK 700/9/5,00-V DG	10430.4	43
PK 700/13/5,08-H DG	12645.4	50	PK 700/22/5,00-H DG	12642.4	43	PK 700/9/5,00-V GN	10430.1	43
PK 700/13/5,08-H GN	12645.1	50	PK 700/22/5,00-H GN	12642.1	43	PK 700/9/5,08-H DG	10463.4	50
PK 700/13/5,08-V DG	12621.4	50	PK 700/22/5,00-V DG	12618.4	43	PK 700/9/5,08-H GN	10463.1	50
PK 700/13/5,08-V GN	12621.1	50	PK 700/22/5,00-V GN	12618.1	43	PK 700/9/5,08-V DG	10441.4	50
PK 700/14/5,00-H DG	12634.4	43	PK 700/22/5,08-H DG	12654.4	50	PK 700/9/5,08-V GN	10441.1	50

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PK 710/10/7,50-V DG	10475.4	55	PK 710/5/7,50-V DG	10470.4	55	PK-TS/22/5,08/15-F GN	13845.1	171
PK 710/10/7,50-V GN	10475.1	55	PK 710/5/7,50-V GN	10470.1	55	PK-TS/23/5,08 GN	12340.1	170
PK 710/10/7,62-V DG	10486.4	56	PK 710/5/7,62-V DG	10481.4	56	PK-TS/23/5,08-F GN	13869.1	171
PK 710/10/7,62-V GN	10486.1	56	PK 710/5/7,62-V GN	10481.1	56	PK-TS/23/5,08/15 GN	13196.1	170
PK 710/11/7,50-V DG	10476.4	55	PK 710/6/15,0-V GN	31626.1	61	PK-TS/23/5,08/15-F GN	13846.1	171
PK 710/11/7,50-V GN	10476.1	55	PK 710/6/7,50-V DG	10471.4	55	PK-TS/24/5,08 GN	12341.1	170
PK 710/11/7,62-V DG	10487.4	56	PK 710/6/7,50-V GN	10471.1	55	PK-TS/24/5,08-F GN	13870.1	171
PK 710/11/7,62-V GN	10487.1	56	PK 710/6/7,62-V DG	10482.4	56	PK-TS/24/5,08/15 GN	13197.1	170
PK 710/12/7,50-V DG	10477.4	55	PK 710/6/7,62-V GN	10482.1	56	PK-TS/24/5,08/15-F GN	13847.1	171
PK 710/12/7,50-V GN	10477.1	55	PK 710/7/7,50-V DG	10472.4	55	PK-TS/3/5,08 GN	12320.1	170
PK 710/12/7,62-V DG	10488.4	56	PK 710/7/7,50-V GN	10472.1	55	PK-TS/3/5,08-F GN	13849.1	171
PK 710/12/7,62-V GN	10488.1	56	PK 710/7/7,62-V DG	10483.4	56	PK-TS/3/5,08/15 GN	13176.1	170
PK 710/13/7,50-V DG	12657.4	55	PK 710/7/7,62-V GN	10483.1	56	PK-TS/3/5,08/15-F GN	13826.1	171
PK 710/13/7,50-V GN	12657.1	55	PK 710/8/7,50-V DG	10473.4	55	PK-TS/4/5,08 GN	12321.1	170
PK 710/13/7,62-V DG	12669.4	56	PK 710/8/7,50-V GN	10473.1	55	PK-TS/4/5,08-F GN	13850.1	171
PK 710/13/7,62-V GN	12669.1	56	PK 710/8/7,62-V DG	10484.4	56	PK-TS/4/5,08/15 GN	13177.1	170
PK 710/14/7,50-V DG	12658.4	55	PK 710/8/7,62-V GN	10484.1	56	PK-TS/4/5,08/15-F GN	13827.1	171
PK 710/14/7,50-V GN	12658.1	55	PK 710/9/7,50-V DG	10474.4	55	PK-TS/5/5,08 GN	12322.1	170
PK 710/14/7,62-V DG	12670.4	56	PK 710/9/7,50-V GN	10474.1	55	PK-TS/5/5,08-F GN	13851.1	171
PK 710/14/7,62-V GN	12670.1	56	PK 710/9/7,62-V DG	10485.4	56	PK-TS/5/5,08/15 GN	13178.1	170
PK 710/15/7,50-V DG	12659.4	55	PK 710/9/7,62-V GN	10485.1	56	PK-TS/5/5,08/15-F GN	13828.1	171
PK 710/15/7,50-V GN	12659.1	55	PK-TS/10/5,08 GN	12327.1	170	PK-TS/6/5,08 GN	12323.1	170
PK 710/15/7,62-V DG	12671.4	56	PK-TS/10/5,08-F GN	13856.1	171	PK-TS/6/5,08-F GN	13852.1	171
PK 710/15/7,62-V GN	12671.1	56	PK-TS/10/5,08/15 GN	13183.1	170	PK-TS/6/5,08/15 GN	13179.1	170
PK 710/16/7,50-V DG	12660.4	55	PK-TS/10/5,08/15-F GN	13833.1	171	PK-TS/6/5,08/15-F GN	13829.1	171
PK 710/16/7,50-V GN	12660.1	55	PK-TS/11/5,08 GN	12328.1	170	PK-TS/7/5,08 GN	12324.1	170
PK 710/16/7,62-V DG	12672.4	56	PK-TS/11/5,08-F GN	13857.1	171	PK-TS/7/5,08-F GN	13853.1	171
PK 710/16/7,62-V GN	12672.1	56	PK-TS/11/5,08/15 GN	13184.1	170	PK-TS/7/5,08/15 GN	13180.1	170
PK 710/17/7,50-V DG	12661.4	55	PK-TS/11/5,08/15-F GN	13834.1	171	PK-TS/7/5,08/15-F GN	13830.1	171
PK 710/17/7,50-V GN	12661.1	55	PK-TS/12/5,08 GN	12329.1	170	PK-TS/8/5,08 GN	12325.1	170
PK 710/17/7,62-V DG	12673.4	56	PK-TS/12/5,08-F GN	13858.1	171	PK-TS/8/5,08-F GN	13854.1	171
PK 710/17/7,62-V GN	12673.1	56	PK-TS/12/5,08/15 GN	13185.1	170	PK-TS/8/5,08/15 GN	13181.1	170
PK 710/18/7,50-V DG	12662.4	55	PK-TS/12/5,08/15-F GN	13835.1	171	PK-TS/8/5,08/15-F GN	13831.1	171
PK 710/18/7,50-V GN	12662.1	55	PK-TS/13/5,08 GN	12330.1	170	PK-TS/9/5,08 GN	12326.1	170
PK 710/18/7,62-V DG	12674.4	56	PK-TS/13/5,08-F GN	13859.1	171	PK-TS/9/5,08-F GN	13855.1	171
PK 710/18/7,62-V GN	12674.1	56	PK-TS/13/5,08/15 GN	13186.1	170	PK-TS/9/5,08/15 GN	13182.1	170
PK 710/19/7,50-V DG	12663.4	55	PK-TS/13/5,08/15-F GN	13836.1	171	PK-TS/9/5,08/15-F GN	13832.1	171
PK 710/19/7,50-V GN	12663.1	55	PK-TS/14/5,08 GN	12331.1	170	PKB 1100/10/5,00 GN	11294.1	111
PK 710/19/7,62-V DG	12675.4	56	PK-TS/14/5,08-F GN	13860.1	171	PKB 1100/10/5,08 GN	11313.1	115
PK 710/19/7,62-V GN	12675.1	56	PK-TS/14/5,08/15 GN	13187.1	170	PKB 1100/11/5,00 GN	11295.1	111
PK 710/2/15,0-V GN	31622.1	61	PK-TS/14/5,08/15-F GN	13837.1	171	PKB 1100/11/5,08 GN	11314.1	115
PK 710/2/7,50-V DG	10467.4	55	PK-TS/15/5,08 GN	12332.1	170	PKB 1100/12/5,00 GN	11296.1	111
PK 710/2/7,50-V GN	10467.1	55	PK-TS/15/5,08-F GN	13861.1	171	PKB 1100/12/5,08 GN	11315.1	115
PK 710/2/7,62-V DG	10478.4	56	PK-TS/15/5,08/15 GN	13188.1	170	PKB 1100/13/5,00 GN	11297.1	111
PK 710/2/7,62-V GN	10478.1	56	PK-TS/15/5,08/15-F GN	13838.1	171	PKB 1100/13/5,08 GN	11316.1	115
PK 710/20/7,50-V DG	12664.4	55	PK-TS/16/5,08 GN	12333.1	170	PKB 1100/14/5,00 GN	11298.1	111
PK 710/20/7,50-V GN	12664.1	55	PK-TS/16/5,08-F GN	13862.1	171	PKB 1100/14/5,08 GN	11317.1	115
PK 710/20/7,62-V DG	12676.4	56	PK-TS/16/5,08/15 GN	13189.1	170	PKB 1100/15/5,00 GN	11299.1	111
PK 710/20/7,62-V GN	12676.1	56	PK-TS/16/5,08/15-F GN	13839.1	171	PKB 1100/15/5,08 GN	11318.1	115
PK 710/21/7,50-V DG	12665.4	55	PK-TS/17/5,08 GN	12334.1	170	PKB 1100/16/5,00 GN	11300.1	111
PK 710/21/7,50-V GN	12665.1	55	PK-TS/17/5,08-F GN	13863.1	171	PKB 1100/16/5,08 GN	11319.1	115
PK 710/21/7,62-V DG	12677.4	56	PK-TS/17/5,08/15 GN	13190.1	170	PKB 1100/17/5,00 GN	11301.1	111
PK 710/21/7,62-V GN	12677.1	56	PK-TS/17/5,08/15-F GN	13840.1	171	PKB 1100/18/5,00 GN	11302.1	111
PK 710/22/7,50-V DG	12666.4	55	PK-TS/18/5,08 GN	12335.1	170	PKB 1100/19/5,00 GN	11303.1	111
PK 710/22/7,50-V GN	12666.1	55	PK-TS/18/5,08-F GN	13864.1	171	PKB 1100/2/5,00 GN	11286.1	111
PK 710/22/7,62-V DG	12678.4	56	PK-TS/18/5,08/15 GN	13191.1	170	PKB 1100/2/5,08 GN	11305.1	115
PK 710/22/7,62-V GN	12678.1	56	PK-TS/18/5,08/15-F GN	13841.1	171	PKB 1100/20/5,00 GN	11304.1	111
PK 710/23/7,50-V DG	12667.4	55	PK-TS/19/5,08 GN	12336.1	170	PKB 1100/3/5,00 GN	11287.1	111
PK 710/23/7,50-V GN	12667.1	55	PK-TS/19/5,08-F GN	13865.1	171	PKB 1100/3/5,08 GN	11306.1	115
PK 710/23/7,62-V DG	12679.4	56	PK-TS/19/5,08/15 GN	13192.1	170	PKB 1100/4/5,00 GN	11288.1	111
PK 710/23/7,62-V GN	12679.1	56	PK-TS/19/5,08/15-F GN	13842.1	171	PKB 1100/4/5,08 GN	11307.1	115
PK 710/24/7,50-V DG	12668.4	55	PK-TS/2/5,08 GN	12319.1	170	PKB 1100/5/5,00 GN	11289.1	111
PK 710/24/7,50-V GN	12668.1	55	PK-TS/2/5,08-F GN	13848.1	171	PKB 1100/5/5,08 GN	11308.1	115
PK 710/24/7,62-V DG	12680.4	56	PK-TS/2/5,08/15 GN	13175.1	170	PKB 1100/6/5,00 GN	11290.1	111
PK 710/24/7,62-V GN	12680.1	56	PK-TS/2/5,08/15-F GN	13825.1	171	PKB 1100/6/5,08 GN	11309.1	115
PK 710/3/15,0-V GN	31623.1	61	PK-TS/20/5,08 GN	12337.1	170	PKB 1100/7/5,00 GN	11291.1	111
PK 710/3/7,50-V DG	10468.4	55	PK-TS/20/5,08-F GN	13866.1	171	PKB 1100/7/5,08 GN	11310.1	115
PK 710/3/7,50-V GN	10468.1	55	PK-TS/20/5,08/15 GN	13193.1	170	PKB 1100/8/5,00 GN	11292.1	111
PK 710/3/7,62-V DG	10479.4	56	PK-TS/20/5,08/15-F GN	13843.1	171	PKB 1100/8/5,08 GN	11311.1	115
PK 710/3/7,62-V GN	10479.1	56	PK-TS/21/5,08 GN	12338.1	170	PKB 1100/9/5,00 GN	11293.1	111
PK 710/4/15,0-V GN	31624.1	61	PK-TS/21/5,08-F GN	13867.1	171	PKB 1100/9/5,08 GN	11312.1	115
PK 710/4/7,50-V DG	10469.4	55	PK-TS/21/5,08/15 GN	13194.1	170	PKB 1110/10/5,00 GN	11328.1	111
PK 710/4/7,50-V GN	10469.1	55	PK-TS/21/5,08/15-F GN	13844.1	171	PKB 1110/10/5,08 GN	11347.1	116
PK 710/4/7,62-V DG	10480.4	56	PK-TS/22/5,08 GN	12339.1	170	PKB 1110/11/5,00 GN	11329.1	111
PK 710/4/7,62-V GN	10480.1	56	PK-TS/22/5,08-F GN	13868.1	171	PKB 1110/11/5,08 GN	11348.1	116
PK 710/5/15,0-V GN	31625.1	61	PK-TS/22/5,08/15 GN	13195.1	170	PKB 1110/12/5,00 GN	11330.1	111

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PKB 1110/12/5,08 GN	11349.1	116	PKB 130/3/10,00 GN	11181.1	125	PKB 1350/2/3,50 DG	13900.4	122
PKB 1110/13/5,00 GN	11331.1	111	PKB 130/3/10,00-BL DG	11201.4	125	PKB 1350/3/3,50 DG	13901.4	122
PKB 1110/13/5,08 GN	11350.1	116	PKB 130/3/10,00-BL GN	11201.1	125	PKB 1350/4/3,50 DG	13902.4	122
PKB 1110/14/5,00 GN	11332.1	111	PKB 130/3/10,16-BL DG	13644.4	126	PKB 1350/5/3,50 DG	13903.4	122
PKB 1110/14/5,08 GN	11351.1	116	PKB 130/3/10,16-BL GN	13644.1	126	PKB 1350/6/3,50 DG	13904.4	122
PKB 1110/15/5,00 GN	11333.1	111	PKB 130/3/5,00 DG	11170.4	123	PKB 1350/7/3,50 DG	13905.4	122
PKB 1110/15/5,08 GN	11352.1	116	PKB 130/3/5,00 GN	11170.1	123	PKB 1350/8/3,50 DG	13906.4	122
PKB 1110/16/5,00 GN	11334.1	111	PKB 130/3/5,00-BL DG	11186.4	123	PKB 1350/9/3,50 DG	13907.4	122
PKB 1110/16/5,08 GN	11353.1	116	PKB 130/3/5,00-BL GN	11186.1	123	PKB 1550/10/3,50 GN	11385.1	102
PKB 1110/17/5,00 GN	11335.1	111	PKB 130/3/5,08-BL DG	13629.4	124	PKB 1550/10/3,50-F GN	13725.1	102
PKB 1110/18/5,00 GN	11336.1	111	PKB 130/3/5,08-BL GN	13629.1	124	PKB 1550/10/3,81 GN	11404.1	105
PKB 1110/19/5,00 GN	11337.1	111	PKB 130/4/10,00 DG	11182.4	125	PKB 1550/10/3,81-F GN	13742.1	105
PKB 1110/2/5,00 GN	11320.1	111	PKB 130/4/10,00 GN	11182.1	125	PKB 1550/11/3,50 GN	11386.1	102
PKB 1110/2/5,08 GN	11339.1	116	PKB 130/4/10,00-BL DG	11202.4	125	PKB 1550/11/3,50-F GN	13726.1	102
PKB 1110/20/5,00 GN	11338.1	111	PKB 130/4/10,00-BL GN	11202.1	125	PKB 1550/11/3,81 GN	11405.1	105
PKB 1110/3/5,00 GN	11321.1	111	PKB 130/4/10,16-BL DG	13645.4	126	PKB 1550/11/3,81-F GN	13743.1	105
PKB 1110/3/5,08 GN	11340.1	116	PKB 130/4/10,16-BL GN	13645.1	126	PKB 1550/12/3,50 GN	11387.1	102
PKB 1110/4/5,00 GN	11322.1	111	PKB 130/4/5,00 DG	11171.4	123	PKB 1550/12/3,50-F GN	13727.1	102
PKB 1110/4/5,08 GN	11341.1	116	PKB 130/4/5,00 GN	11171.1	123	PKB 1550/12/3,81 GN	11406.1	105
PKB 1110/5/5,00 GN	11323.1	111	PKB 130/4/5,00-BL DG	11187.4	123	PKB 1550/12/3,81-F GN	13744.1	105
PKB 1110/5/5,08 GN	11342.1	116	PKB 130/4/5,00-BL GN	11187.1	123	PKB 1550/13/3,50 GN	11388.1	102
PKB 1110/6/5,00 GN	11324.1	111	PKB 130/4/5,08-BL DG	13630.4	124	PKB 1550/13/3,50-F GN	13728.1	102
PKB 1110/6/5,08 GN	11343.1	116	PKB 130/4/5,08-BL GN	13630.1	124	PKB 1550/13/3,81 GN	11407.1	105
PKB 1110/7/5,00 GN	11325.1	111	PKB 130/5/10,00 DG	11183.4	125	PKB 1550/13/3,81-F GN	13745.1	105
PKB 1110/7/5,08 GN	11344.1	116	PKB 130/5/10,00 GN	11183.1	125	PKB 1550/14/3,50 GN	11389.1	102
PKB 1110/8/5,00 GN	11326.1	111	PKB 130/5/10,00-BL DG	11203.4	125	PKB 1550/14/3,50-F GN	13729.1	102
PKB 1110/8/5,08 GN	11345.1	116	PKB 130/5/10,00-BL GN	11203.1	125	PKB 1550/14/3,81 GN	11408.1	105
PKB 1110/9/5,00 GN	11327.1	111	PKB 130/5/10,16-BL DG	13646.4	126	PKB 1550/14/3,81-F GN	13746.1	105
PKB 1110/9/5,08 GN	11346.1	116	PKB 130/5/10,16-BL GN	13646.1	126	PKB 1550/15/3,50 GN	11390.1	102
PKB 130/10/5,00 DG	11177.4	123	PKB 130/5/5,00 DG	11172.4	123	PKB 1550/15/3,50-F GN	13730.1	102
PKB 130/10/5,00 GN	11177.1	123	PKB 130/5/5,00 GN	11172.1	123	PKB 1550/15/3,81 GN	11409.1	105
PKB 130/10/5,00-BL DG	11193.4	123	PKB 130/5/5,00-BL DG	11188.4	123	PKB 1550/15/3,81-F GN	13747.1	105
PKB 130/10/5,00-BL GN	11193.1	123	PKB 130/5/5,00-BL GN	11188.1	123	PKB 1550/16/3,50 GN	11391.1	102
PKB 130/10/5,08-BL DG	13636.4	124	PKB 130/5/5,08-BL DG	13631.4	124	PKB 1550/16/3,50-F GN	13731.1	102
PKB 130/10/5,08-BL GN	13636.1	124	PKB 130/5/5,08-BL GN	13631.1	124	PKB 1550/16/3,81 GN	11410.1	105
PKB 130/11/5,00 DG	11178.4	123	PKB 130/6/10,00 DG	11184.4	125	PKB 1550/16/3,81-F GN	13748.1	105
PKB 130/11/5,00 GN	11178.1	123	PKB 130/6/10,00 GN	11184.1	125	PKB 1550/17/3,50 GN	11392.1	102
PKB 130/11/5,00-BL DG	11194.4	123	PKB 130/6/10,00-BL DG	11204.4	125	PKB 1550/17/3,50-F GN	13732.1	102
PKB 130/11/5,00-BL GN	11194.1	123	PKB 130/6/10,00-BL GN	11204.1	125	PKB 1550/17/3,81 GN	13981.1	105
PKB 130/11/5,08-BL DG	13637.4	124	PKB 130/6/10,16-BL DG	13647.4	126	PKB 1550/17/3,81-F GN	13749.1	105
PKB 130/11/5,08-BL GN	13637.1	124	PKB 130/6/10,16-BL GN	13647.1	126	PKB 1550/18/3,50 GN	11393.1	102
PKB 130/12/5,00 DG	11179.4	123	PKB 130/6/5,00 DG	11173.4	123	PKB 1550/18/3,50-F GN	13733.1	102
PKB 130/12/5,00 GN	11179.1	123	PKB 130/6/5,00 GN	11173.1	123	PKB 1550/18/3,81 GN	13982.1	105
PKB 130/12/5,00-BL DG	11195.4	123	PKB 130/6/5,00-BL DG	11189.4	123	PKB 1550/18/3,81-F GN	13750.1	105
PKB 130/12/5,00-BL GN	11195.1	123	PKB 130/6/5,00-BL GN	11189.1	123	PKB 1550/19/3,50 GN	11394.1	102
PKB 130/12/5,08-BL DG	13638.4	124	PKB 130/6/5,08-BL DG	13632.4	124	PKB 1550/19/3,50-F GN	13979.1	102
PKB 130/12/5,08-BL GN	13638.1	124	PKB 130/6/5,08-BL GN	13632.1	124	PKB 1550/19/3,81 GN	13983.1	105
PKB 130/13/5,00-BL DG	11196.4	123	PKB 130/7/10,00-BL DG	11205.4	125	PKB 1550/19/3,81-F GN	13751.1	105
PKB 130/13/5,00-BL GN	11196.1	123	PKB 130/7/10,00-BL GN	11205.1	125	PKB 1550/2/3,50 GN	11377.1	102
PKB 130/13/5,08-BL DG	13639.4	124	PKB 130/7/10,16-BL DG	13648.4	126	PKB 1550/2/3,50-F GN	13717.1	102
PKB 130/13/5,08-BL GN	13639.1	124	PKB 130/7/10,16-BL GN	13648.1	126	PKB 1550/2/3,81 GN	11396.1	105
PKB 130/14/5,00-BL DG	11197.4	123	PKB 130/7/5,00 DG	11174.4	123	PKB 1550/2/3,81-F GN	13734.1	105
PKB 130/14/5,00-BL GN	11197.1	123	PKB 130/7/5,00 GN	11174.1	123	PKB 1550/20/3,50 GN	11395.1	102
PKB 130/14/5,08-BL DG	13640.4	124	PKB 130/7/5,00-BL DG	11190.4	123	PKB 1550/20/3,50-F GN	13980.1	102
PKB 130/14/5,08-BL GN	13640.1	124	PKB 130/7/5,00-BL GN	11190.1	123	PKB 1550/20/3,81 GN	13984.1	105
PKB 130/15/5,00-BL DG	11198.4	123	PKB 130/7/5,08-BL DG	13633.4	124	PKB 1550/20/3,81-F GN	13752.1	105
PKB 130/15/5,00-BL GN	11198.1	123	PKB 130/7/5,08-BL GN	13633.1	124	PKB 1550/3/3,50 GN	11378.1	102
PKB 130/15/5,08-BL DG	13641.4	124	PKB 130/8/10,00-BL DG	11206.4	125	PKB 1550/3/3,50-F GN	13718.1	102
PKB 130/15/5,08-BL GN	13641.1	124	PKB 130/8/10,00-BL GN	11206.1	125	PKB 1550/3/3,81 GN	11397.1	105
PKB 130/16/5,00-BL DG	11199.4	123	PKB 130/8/10,16-BL DG	13649.4	126	PKB 1550/3/3,81-F GN	13735.1	105
PKB 130/16/5,00-BL GN	11199.1	123	PKB 130/8/10,16-BL GN	13649.1	126	PKB 1550/4/3,50 GN	11379.1	102
PKB 130/16/5,08-BL DG	13642.4	124	PKB 130/8/5,00 DG	11175.4	123	PKB 1550/4/3,50-F GN	13719.1	102
PKB 130/16/5,08-BL GN	13642.1	124	PKB 130/8/5,00 GN	11175.1	123	PKB 1550/4/3,81 GN	11398.1	105
PKB 130/2/10,00 DG	11180.4	125	PKB 130/8/5,00-BL DG	11191.4	123	PKB 1550/4/3,81-F GN	13736.1	105
PKB 130/2/10,00 GN	11180.1	125	PKB 130/8/5,00-BL GN	11191.1	123	PKB 1550/5/3,50 GN	11380.1	102
PKB 130/2/10,00-BL DG	11200.4	125	PKB 130/8/5,08-BL DG	13634.4	124	PKB 1550/5/3,50-F GN	13720.1	102
PKB 130/2/10,00-BL GN	11200.1	125	PKB 130/8/5,08-BL GN	13634.1	124	PKB 1550/5/3,81 GN	11399.1	105
PKB 130/2/10,16-BL DG	13643.4	126	PKB 130/9/5,00 DG	11176.4	123	PKB 1550/5/3,81-F GN	13737.1	105
PKB 130/2/10,16-BL GN	13643.1	126	PKB 130/9/5,00 GN	11176.1	123	PKB 1550/6/3,50 GN	11381.1	102
PKB 130/2/5,00 DG	11169.4	123	PKB 130/9/5,00-BL DG	11192.4	123	PKB 1550/6/3,50-F GN	13721.1	102
PKB 130/2/5,00 GN	11169.1	123	PKB 130/9/5,00-BL GN	11192.1	123	PKB 1550/6/3,81 GN	11400.1	105
PKB 130/2/5,00-BL DG	11185.4	123	PKB 130/9/5,08-BL DG	13635.4	124	PKB 1550/6/3,81-F GN	13738.1	105
PKB 130/2/5,00-BL GN	11185.1	123	PKB 130/9/5,08-BL GN	13635.1	124	PKB 1550/7/3,50 GN	11382.1	102
PKB 130/2/5,08-BL DG	13628.4	124	PKB 1350/10/3,50 DG	13908.4	122	PKB 1550/7/3,50-F GN	13722.1	102
PKB 130/2/5,08-BL GN	13628.1	124	PKB 1350/11/3,50 DG	13909.4	122	PKB 1550/7/3,81 GN	11401.1	105
PKB 130/3/10,00 DG	11181.4	125	PKB 1350/12/3,50 DG	13910.4	122	PKB 1550/7/3,81-F GN	13739.1	105

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PKB 1550/8/3,50 GN	11383.1	102	PKB 1552/6/3,50 GN	30066.1	104	PKB 950/2/5,00 GN	11207.1	108
PKB 1550/8/3,50-F GN	13723.1	102	PKB 1552/6/3,50-F GN	30086.1	104	PKB 950/2/5,00-F GN	11268.1	108
PKB 1550/8/3,81 GN	11402.1	105	PKB 1552/7/3,50 GN	30067.1	104	PKB 950/2/5,00-F-HC GN	30162.1	109
PKB 1550/8/3,81-F GN	13740.1	105	PKB 1552/7/3,50-F GN	30087.1	104	PKB 950/2/5,00-HC GN	30122.1	109
PKB 1550/9/3,50 GN	11384.1	102	PKB 1552/8/3,50 GN	30068.1	104	PKB 950/2/5,08 GN	11230.1	112
PKB 1550/9/3,50-F GN	13724.1	102	PKB 1552/8/3,50-F GN	30088.1	104	PKB 950/2/5,08-F GN	11277.1	112
PKB 1550/9/3,81 GN	11403.1	105	PKB 1552/9/3,50 GN	30069.1	104	PKB 950/20/5,00 GN	11225.1	108
PKB 1550/9/3,81-F GN	13741.1	105	PKB 1552/9/3,50-F GN	30089.1	104	PKB 950/20/5,00-F GN	13235.1	108
PKB 1551/10/3,50 GN	30010.1	103	PKB 4350/10/3,50 GN	13965.1	97	PKB 950/20/5,08 GN	11248.1	112
PKB 1551/10/3,50-F GN	30030.1	103	PKB 4350/10/3,50-G GN	13976.1	97	PKB 950/20/5,08-F GN	13221.1	112
PKB 1551/11/3,50 GN	30011.1	103	PKB 4350/11/3,50 GN	13966.1	97	PKB 950/21/5,00 GN	11226.1	108
PKB 1551/11/3,50-F GN	30031.1	103	PKB 4350/11/3,50-G GN	13977.1	97	PKB 950/21/5,00-F GN	13236.1	108
PKB 1551/12/3,50 GN	30012.1	103	PKB 4350/12/3,50 GN	13967.1	97	PKB 950/21/5,08 GN	11249.1	112
PKB 1551/12/3,50-F GN	30032.1	103	PKB 4350/12/3,50-G GN	13978.1	97	PKB 950/21/5,08-F GN	13222.1	112
PKB 1551/13/3,50 GN	30013.1	103	PKB 4350/2/3,50 GN	13957.1	97	PKB 950/22/5,00 GN	11227.1	108
PKB 1551/13/3,50-F GN	30033.1	103	PKB 4350/2/3,50-G GN	13968.1	97	PKB 950/22/5,00-F GN	13237.1	108
PKB 1551/14/3,50 GN	30014.1	103	PKB 4350/3/3,50 GN	13958.1	97	PKB 950/22/5,08 GN	11250.1	112
PKB 1551/14/3,50-F GN	30034.1	103	PKB 4350/3/3,50-G GN	13969.1	97	PKB 950/22/5,08-F GN	13223.1	112
PKB 1551/15/3,50 GN	30015.1	103	PKB 4350/4/3,50 GN	13959.1	97	PKB 950/23/5,00 GN	11228.1	108
PKB 1551/15/3,50-F GN	30035.1	103	PKB 4350/4/3,50-G GN	13970.1	97	PKB 950/23/5,00-F GN	13238.1	108
PKB 1551/16/3,50 GN	30016.1	103	PKB 4350/5/3,50 GN	13960.1	97	PKB 950/23/5,08 GN	11251.1	112
PKB 1551/16/3,50-F GN	30036.1	103	PKB 4350/5/3,50-G GN	13971.1	97	PKB 950/23/5,08-F GN	13707.1	112
PKB 1551/17/3,50 GN	30017.1	103	PKB 4350/6/3,50 GN	13961.1	97	PKB 950/24/5,00 GN	11229.1	108
PKB 1551/17/3,50-F GN	30037.1	103	PKB 4350/6/3,50-G GN	13972.1	97	PKB 950/24/5,00-F GN	13239.1	108
PKB 1551/18/3,50 GN	30018.1	103	PKB 4350/7/3,50 GN	13962.1	97	PKB 950/24/5,08 GN	11252.1	112
PKB 1551/18/3,50-F GN	30038.1	103	PKB 4350/7/3,50-G GN	13973.1	97	PKB 950/24/5,08-F GN	13708.1	112
PKB 1551/19/3,50 GN	30019.1	103	PKB 4350/8/3,50 GN	13963.1	97	PKB 950/3/5,00 GN	11208.1	108
PKB 1551/19/3,50-F GN	30039.1	103	PKB 4350/8/3,50-G GN	13974.1	97	PKB 950/3/5,00-F GN	11269.1	108
PKB 1551/2/3,50 GN	30002.1	103	PKB 4350/9/3,50 GN	13964.1	97	PKB 950/3/5,00-F-HC GN	30163.1	109
PKB 1551/2/3,50-F GN	30022.1	103	PKB 4350/9/3,50-G GN	13975.1	97	PKB 950/3/5,00-HC GN	30123.1	109
PKB 1551/20/3,50 GN	30020.1	103	PKB 950/10/5,00 GN	11215.1	108	PKB 950/3/5,08 GN	11231.1	112
PKB 1551/20/3,50-F GN	30040.1	103	PKB 950/10/5,00-F GN	11276.1	108	PKB 950/3/5,08-F GN	11278.1	112
PKB 1551/3/3,50 GN	30003.1	103	PKB 950/10/5,00-F-HC GN	30170.1	109	PKB 950/4/5,00 GN	11209.1	108
PKB 1551/3/3,50-F GN	30023.1	103	PKB 950/10/5,00-HC GN	30130.1	109	PKB 950/4/5,00-F GN	11270.1	108
PKB 1551/4/3,50 GN	30004.1	103	PKB 950/10/5,08 GN	11238.1	112	PKB 950/4/5,00-F-HC GN	30164.1	109
PKB 1551/4/3,50-F GN	30024.1	103	PKB 950/10/5,08-F GN	11285.1	112	PKB 950/4/5,00-HC GN	30124.1	109
PKB 1551/5/3,50 GN	30005.1	103	PKB 950/11/5,00 GN	11216.1	108	PKB 950/4/5,08 GN	11232.1	112
PKB 1551/5/3,50-F GN	30025.1	103	PKB 950/11/5,00-F GN	13226.1	108	PKB 950/4/5,08-F GN	11279.1	112
PKB 1551/6/3,50 GN	30006.1	103	PKB 950/11/5,00-F-HC GN	30171.1	109	PKB 950/5/5,00 GN	11210.1	108
PKB 1551/6/3,50-F GN	30026.1	103	PKB 950/11/5,00-HC GN	30131.1	109	PKB 950/5/5,00-F GN	11271.1	108
PKB 1551/7/3,50 GN	30007.1	103	PKB 950/11/5,08 GN	11239.1	112	PKB 950/5/5,00-F-HC GN	30165.1	109
PKB 1551/7/3,50-F GN	30027.1	103	PKB 950/11/5,08-F GN	13212.1	112	PKB 950/5/5,00-HC GN	30125.1	109
PKB 1551/8/3,50 GN	30008.1	103	PKB 950/12/5,00 GN	11217.1	108	PKB 950/5/5,08 GN	11233.1	112
PKB 1551/8/3,50-F GN	30028.1	103	PKB 950/12/5,00-F GN	13227.1	108	PKB 950/5/5,08-F GN	11280.1	112
PKB 1551/9/3,50 GN	30009.1	103	PKB 950/12/5,00-F-HC GN	30172.1	109	PKB 950/6/5,00 GN	11211.1	108
PKB 1551/9/3,50-F GN	30029.1	103	PKB 950/12/5,00-HC GN	30132.1	109	PKB 950/6/5,00-F GN	11272.1	108
PKB 1552/10/3,50 GN	30070.1	104	PKB 950/12/5,08 GN	11240.1	112	PKB 950/6/5,00-F-HC GN	30166.1	109
PKB 1552/10/3,50-F GN	30090.1	104	PKB 950/12/5,08-F GN	13213.1	112	PKB 950/6/5,00-HC GN	30126.1	109
PKB 1552/11/3,50 GN	30071.1	104	PKB 950/13/5,00 GN	11218.1	108	PKB 950/6/5,08 GN	11234.1	112
PKB 1552/11/3,50-F GN	30091.1	104	PKB 950/13/5,00-F GN	13228.1	108	PKB 950/6/5,08-F GN	11281.1	112
PKB 1552/12/3,50 GN	30072.1	104	PKB 950/13/5,08 GN	11241.1	112	PKB 950/7/5,00 GN	11212.1	108
PKB 1552/12/3,50-F GN	30092.1	104	PKB 950/13/5,08-F GN	13214.1	112	PKB 950/7/5,00-F GN	11273.1	108
PKB 1552/13/3,50 GN	30073.1	104	PKB 950/14/5,00 GN	11219.1	108	PKB 950/7/5,00-F-HC GN	30167.1	109
PKB 1552/13/3,50-F GN	30093.1	104	PKB 950/14/5,00-F GN	13229.1	108	PKB 950/7/5,00-HC GN	30127.1	109
PKB 1552/14/3,50 GN	30074.1	104	PKB 950/14/5,08 GN	11242.1	112	PKB 950/7/5,08 GN	11235.1	112
PKB 1552/14/3,50-F GN	30094.1	104	PKB 950/14/5,08-F GN	13215.1	112	PKB 950/7/5,08-F GN	11282.1	112
PKB 1552/15/3,50 GN	30075.1	104	PKB 950/15/5,00 GN	11220.1	108	PKB 950/8/5,00 GN	11213.1	108
PKB 1552/15/3,50-F GN	30095.1	104	PKB 950/15/5,00-F GN	13230.1	108	PKB 950/8/5,00-F GN	11274.1	108
PKB 1552/16/3,50 GN	30076.1	104	PKB 950/15/5,08 GN	11243.1	112	PKB 950/8/5,00-F-HC GN	30168.1	109
PKB 1552/16/3,50-F GN	30096.1	104	PKB 950/15/5,08-F GN	13216.1	112	PKB 950/8/5,00-HC GN	30128.1	109
PKB 1552/17/3,50 GN	30077.1	104	PKB 950/16/5,00 GN	11221.1	108	PKB 950/8/5,08 GN	11236.1	112
PKB 1552/17/3,50-F GN	30097.1	104	PKB 950/16/5,00-F GN	13231.1	108	PKB 950/8/5,08-F GN	11283.1	112
PKB 1552/18/3,50 GN	30078.1	104	PKB 950/16/5,08 GN	11244.1	112	PKB 950/9/5,00 GN	11214.1	108
PKB 1552/18/3,50-F GN	30098.1	104	PKB 950/16/5,08-F GN	13217.1	112	PKB 950/9/5,00-F GN	11275.1	108
PKB 1552/19/3,50 GN	30079.1	104	PKB 950/17/5,00 GN	11222.1	108	PKB 950/9/5,00-F-HC GN	30169.1	109
PKB 1552/19/3,50-F GN	30099.1	104	PKB 950/17/5,00-F GN	13232.1	108	PKB 950/9/5,00-HC GN	30129.1	109
PKB 1552/2/3,50 GN	30062.1	104	PKB 950/17/5,08 GN	11245.1	112	PKB 950/9/5,08 GN	11237.1	112
PKB 1552/2/3,50-F GN	30082.1	104	PKB 950/17/5,08-F GN	13218.1	112	PKB 950/9/5,08-F GN	11284.1	112
PKB 1552/20/3,50 GN	30080.1	104	PKB 950/18/5,00 GN	11223.1	108	PKB 955/10/5,00 GN	30210.1	110
PKB 1552/20/3,50-F GN	30100.1	104	PKB 950/18/5,00-F GN	13233.1	108	PKB 955/11/5,00 GN	30211.1	110
PKB 1552/3/3,50 GN	30063.1	104	PKB 950/18/5,08 GN	11246.1	112	PKB 955/12/5,00 GN	30212.1	110
PKB 1552/3/3,50-F GN	30083.1	104	PKB 950/18/5,08-F GN	13219.1	112	PKB 955/13/5,00 GN	30213.1	110
PKB 1552/4/3,50 GN	30064.1	104	PKB 950/19/5,00 GN	11224.1	108	PKB 955/14/5,00 GN	30214.1	110
PKB 1552/4/3,50-F GN	30084.1	104	PKB 950/19/5,00-F GN	13234.1	108	PKB 955/15/5,00 GN	30215.1	110
PKB 1552/5/3,50 GN	30065.1	104	PKB 950/19/5,08 GN	11247.1	112	PKB 955/16/5,00 GN	30216.1	110
PKB 1552/5/3,50-F GN	30085.1	104	PKB 950/19/5,08-F GN	13220.1	112	PKB 955/17/5,00 GN	30217.1	110

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PKB 955/18/5,00 GN	30218.1	110	PKBZ 1520/10/5,08 GN	31880.1	117	PKBZ 1552/4/3,81-F GN	14081.1	107
PKB 955/19/5,00 GN	30219.1	110	PKBZ 1520/11/5,08 GN	31881.1	117	PKBZ 1552/5/3,81 GN	13065.1	107
PKB 955/2/5,00 GN	30202.1	110	PKBZ 1520/12/5,08 GN	31882.1	117	PKBZ 1552/5/3,81-F GN	14082.1	107
PKB 955/20/5,00 GN	30220.1	110	PKBZ 1520/2/5,08 GN	31872.1	117	PKBZ 1552/6/3,81 GN	13066.1	107
PKB 955/21/5,00 GN	30221.1	110	PKBZ 1520/3/5,08 GN	31873.1	117	PKBZ 1552/6/3,81-F GN	14083.1	107
PKB 955/22/5,00 GN	30222.1	110	PKBZ 1520/4/5,08 GN	31874.1	117	PKBZ 1552/7/3,81 GN	13067.1	107
PKB 955/23/5,00 GN	30223.1	110	PKBZ 1520/5/5,08 GN	31875.1	117	PKBZ 1552/7/3,81-F GN	14084.1	107
PKB 955/24/5,00 GN	30224.1	110	PKBZ 1520/6/5,08 GN	31876.1	117	PKBZ 1552/8/3,81 GN	13068.1	107
PKB 955/3/5,00 GN	30203.1	110	PKBZ 1520/7/5,08 GN	31877.1	117	PKBZ 1552/8/3,81-F GN	14085.1	107
PKB 955/4/5,00 GN	30204.1	110	PKBZ 1520/8/5,08 GN	31878.1	117	PKBZ 1552/9/3,81 GN	13069.1	107
PKB 955/5/5,00 GN	30205.1	110	PKBZ 1520/9/5,08 GN	31879.1	117	PKBZ 1552/9/3,81-F GN	14086.1	107
PKB 955/6/5,00 GN	30206.1	110	PKBZ 1551/10/3,81 GN	13047.1	106	PKBZ 950/10/5,08-F-HC GN	30190.1	113
PKB 955/7/5,00 GN	30207.1	110	PKBZ 1551/10/3,81-F GN	14068.1	106	PKBZ 950/10/5,08-HC GN	30150.1	113
PKB 955/8/5,00 GN	30208.1	110	PKBZ 1551/11/3,81 GN	13048.1	106	PKBZ 950/11/5,08-F-HC GN	30191.1	113
PKB 955/9/5,00 GN	30209.1	110	PKBZ 1551/11/3,81-F GN	14069.1	106	PKBZ 950/11/5,08-HC GN	30151.1	113
PKB 960/10/7,62 GN	11261.1	118	PKBZ 1551/12/3,81 GN	13049.1	106	PKBZ 950/12/5,08-F-HC GN	30192.1	113
PKB 960/11/7,62 GN	11262.1	118	PKBZ 1551/12/3,81-F GN	14070.1	106	PKBZ 950/12/5,08-HC GN	30152.1	113
PKB 960/12/7,62 GN	11263.1	118	PKBZ 1551/13/3,81 GN	13050.1	106	PKBZ 950/2/5,08-F-HC GN	30182.1	113
PKB 960/13/7,62 GN	11264.1	118	PKBZ 1551/13/3,81-F GN	14071.1	106	PKBZ 950/2/5,08-HC GN	30142.1	113
PKB 960/14/7,62 GN	11265.1	118	PKBZ 1551/14/3,81 GN	13051.1	106	PKBZ 950/3/5,08-F-HC GN	30183.1	113
PKB 960/15/7,62 GN	11266.1	118	PKBZ 1551/14/3,81-F GN	14072.1	106	PKBZ 950/3/5,08-HC GN	30143.1	113
PKB 960/16/7,62 GN	11267.1	118	PKBZ 1551/15/3,81 GN	13052.1	106	PKBZ 950/4/5,08-F-HC GN	30184.1	113
PKB 960/2/7,62 GN	11253.1	118	PKBZ 1551/15/3,81-F GN	14073.1	106	PKBZ 950/4/5,08-HC GN	30144.1	113
PKB 960/3/7,62 GN	11254.1	118	PKBZ 1551/16/3,81 GN	13053.1	106	PKBZ 950/5/5,08-F-HC GN	30185.1	113
PKB 960/4/7,62 GN	11255.1	118	PKBZ 1551/16/3,81-F GN	14074.1	106	PKBZ 950/5/5,08-HC GN	30145.1	113
PKB 960/5/7,62 GN	11256.1	118	PKBZ 1551/17/3,81 GN	13054.1	106	PKBZ 950/6/5,08-F-HC GN	30186.1	113
PKB 960/6/7,62 GN	11257.1	118	PKBZ 1551/17/3,81-F GN	14075.1	106	PKBZ 950/6/5,08-HC GN	30146.1	113
PKB 960/7/7,62 GN	11258.1	118	PKBZ 1551/18/3,81 GN	13055.1	106	PKBZ 950/7/5,08-F-HC GN	30187.1	113
PKB 960/8/7,62 GN	11259.1	118	PKBZ 1551/18/3,81-F GN	14076.1	106	PKBZ 950/7/5,08-HC GN	30147.1	113
PKB 960/9/7,62 GN	11260.1	118	PKBZ 1551/19/3,81 GN	13056.1	106	PKBZ 950/8/5,08-F-HC GN	30188.1	113
PKBZ 1100/10/5,08-F GN	14227.1	115	PKBZ 1551/19/3,81-F GN	14077.1	106	PKBZ 950/8/5,08-HC GN	30148.1	113
PKBZ 1100/11/5,08-F GN	14228.1	115	PKBZ 1551/2/3,81 GN	13039.1	106	PKBZ 950/9/5,08-F-HC GN	30189.1	113
PKBZ 1100/12/5,08-F GN	14229.1	115	PKBZ 1551/2/3,81-F GN	14060.1	106	PKBZ 950/9/5,08-HC GN	30149.1	113
PKBZ 1100/13/5,08-F GN	14230.1	115	PKBZ 1551/20/3,81 GN	13057.1	106	PKBZ 955/10/5,08 GN	30240.1	114
PKBZ 1100/14/5,08-F GN	14231.1	115	PKBZ 1551/20/3,81-F GN	14078.1	106	PKBZ 955/11/5,08 GN	30241.1	114
PKBZ 1100/15/5,08-F GN	14232.1	115	PKBZ 1551/3/3,81 GN	13040.1	106	PKBZ 955/12/5,08 GN	30242.1	114
PKBZ 1100/16/5,08-F GN	14233.1	115	PKBZ 1551/3/3,81-F GN	14061.1	106	PKBZ 955/13/5,08 GN	30243.1	114
PKBZ 1100/17/5,08-F GN	14234.1	115	PKBZ 1551/4/3,81 GN	13041.1	106	PKBZ 955/14/5,08 GN	30244.1	114
PKBZ 1100/18/5,08-F GN	14235.1	115	PKBZ 1551/4/3,81-F GN	14062.1	106	PKBZ 955/15/5,08 GN	30245.1	114
PKBZ 1100/19/5,08-F GN	14236.1	115	PKBZ 1551/5/3,81 GN	13042.1	106	PKBZ 955/16/5,08 GN	30246.1	114
PKBZ 1100/2/5,08-F GN	14219.1	115	PKBZ 1551/5/3,81-F GN	14063.1	106	PKBZ 955/17/5,08 GN	30247.1	114
PKBZ 1100/20/5,08-F GN	14237.1	115	PKBZ 1551/6/3,81 GN	13043.1	106	PKBZ 955/18/5,08 GN	30248.1	114
PKBZ 1100/21/5,08-F GN	14238.1	115	PKBZ 1551/6/3,81-F GN	14064.1	106	PKBZ 955/19/5,08 GN	30249.1	114
PKBZ 1100/22/5,08-F GN	14239.1	115	PKBZ 1551/7/3,81 GN	13044.1	106	PKBZ 955/2/5,08 GN	30232.1	114
PKBZ 1100/23/5,08-F GN	14240.1	115	PKBZ 1551/7/3,81-F GN	14065.1	106	PKBZ 955/20/5,08 GN	30250.1	114
PKBZ 1100/24/5,08-F GN	14241.1	115	PKBZ 1551/8/3,81 GN	13045.1	106	PKBZ 955/21/5,08 GN	30251.1	114
PKBZ 1100/3/5,08-F GN	14220.1	115	PKBZ 1551/8/3,81-F GN	14066.1	106	PKBZ 955/22/5,08 GN	30252.1	114
PKBZ 1100/4/5,08-F GN	14221.1	115	PKBZ 1551/9/3,81 GN	13046.1	106	PKBZ 955/23/5,08 GN	30253.1	114
PKBZ 1100/5/5,08-F GN	14222.1	115	PKBZ 1551/9/3,81-F GN	14067.1	106	PKBZ 955/24/5,08 GN	30254.1	114
PKBZ 1100/6/5,08-F GN	14223.1	115	PKBZ 1552/10/3,81 GN	13070.1	107	PKBZ 955/3/5,08 GN	30233.1	114
PKBZ 1100/7/5,08-F GN	14224.1	115	PKBZ 1552/10/3,81-F GN	14087.1	107	PKBZ 955/4/5,08 GN	30234.1	114
PKBZ 1100/8/5,08-F GN	14225.1	115	PKBZ 1552/11/3,81 GN	13071.1	107	PKBZ 955/5/5,08 GN	30235.1	114
PKBZ 1100/9/5,08-F GN	14226.1	115	PKBZ 1552/11/3,81-F GN	14088.1	107	PKBZ 955/6/5,08 GN	30236.1	114
PKBZ 1110/10/5,08-F GN	14319.1	116	PKBZ 1552/12/3,81 GN	13072.1	107	PKBZ 955/7/5,08 GN	30237.1	114
PKBZ 1110/11/5,08-F GN	14320.1	116	PKBZ 1552/12/3,81-F GN	14089.1	107	PKBZ 955/8/5,08 GN	30238.1	114
PKBZ 1110/12/5,08-F GN	14321.1	116	PKBZ 1552/13/3,81 GN	13073.1	107	PKBZ 955/9/5,08 GN	30239.1	114
PKBZ 1110/13/5,08-F GN	14322.1	116	PKBZ 1552/13/3,81-F GN	14090.1	107	PKBZ 965/10/7,62-F GN	14302.1	118
PKBZ 1110/14/5,08-F GN	14323.1	116	PKBZ 1552/14/3,81 GN	13074.1	107	PKBZ 965/11/7,62-F GN	14303.1	118
PKBZ 1110/15/5,08-F GN	14324.1	116	PKBZ 1552/14/3,81-F GN	14091.1	107	PKBZ 965/12/7,62-F GN	14304.1	118
PKBZ 1110/16/5,08-F GN	14325.1	116	PKBZ 1552/15/3,81 GN	13075.1	107	PKBZ 965/13/7,62-F GN	14305.1	118
PKBZ 1110/17/5,08-F GN	14326.1	116	PKBZ 1552/15/3,81-F GN	14092.1	107	PKBZ 965/14/7,62-F GN	14306.1	118
PKBZ 1110/18/5,08-F GN	14327.1	116	PKBZ 1552/16/3,81 GN	13076.1	107	PKBZ 965/15/7,62-F GN	14307.1	118
PKBZ 1110/19/5,08-F GN	14328.1	116	PKBZ 1552/16/3,81-F GN	14093.1	107	PKBZ 965/16/7,62-F GN	14308.1	118
PKBZ 1110/2/5,08-F GN	14311.1	116	PKBZ 1552/17/3,81 GN	13077.1	107	PKBZ 965/2/7,62-F GN	14294.1	118
PKBZ 1110/20/5,08-F GN	14329.1	116	PKBZ 1552/17/3,81-F GN	14094.1	107	PKBZ 965/3/7,62-F GN	14295.1	118
PKBZ 1110/21/5,08-F GN	14330.1	116	PKBZ 1552/18/3,81 GN	13078.1	107	PKBZ 965/4/7,62-F GN	14296.1	118
PKBZ 1110/22/5,08-F GN	14331.1	116	PKBZ 1552/18/3,81-F GN	14095.1	107	PKBZ 965/5/7,62-F GN	14297.1	118
PKBZ 1110/23/5,08-F GN	14332.1	116	PKBZ 1552/19/3,81 GN	13079.1	107	PKBZ 965/6/7,62-F GN	14298.1	118
PKBZ 1110/24/5,08-F GN	14333.1	116	PKBZ 1552/19/3,81-F GN	14096.1	107	PKBZ 965/7/7,62-F GN	14299.1	118
PKBZ 1110/3/5,08-F GN	14312.1	116	PKBZ 1552/2/3,81 GN	13062.1	107	PKBZ 965/8/7,62-F GN	14300.1	118
PKBZ 1110/4/5,08-F GN	14313.1	116	PKBZ 1552/2/3,81-F GN	14079.1	107	PKBZ 965/9/7,62-F GN	14301.1	118
PKBZ 1110/5/5,08-F GN	14314.1	116	PKBZ 1552/20/3,81 GN	13080.1	107	PKD 370/10/5,00-V DG	10420.4	45
PKBZ 1110/6/5,08-F GN	14315.1	116	PKBZ 1552/20/3,81-F GN	14097.1	107	PKD 370/10/5,00-V GN	10420.1	45
PKBZ 1110/7/5,08-F GN	14316.1	116	PKBZ 1552/3/3,81 GN	13063.1	107	PKD 370/11/5,00-V DG	10421.4	45
PKBZ 1110/8/5,08-F GN	14317.1	116	PKBZ 1552/3/3,81-F GN	14080.1	107	PKD 370/11/5,00-V GN	10421.1	45
PKBZ 1110/9/5,08-F GN	14318.1	116	PKBZ 1552/4/3,81 GN	13064.1	107	PKD 370/12/5,00-V DG	10422.4	45

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PKD 370/12/5,00-V GN	10422.1	45	PKD 750/18/5,08-V GN	12794.1	51	PKD 790/19/5,00-V GN	13171.1	46
PKD 370/13/5,00-V DG	12589.4	45	PKD 750/19/5,00-V DG	12687.4	45	PKD 790/2/5,00-V DG	10511.4	46
PKD 370/13/5,00-V GN	12589.1	45	PKD 750/19/5,00-V GN	12687.1	45	PKD 790/2/5,00-V GN	10511.1	46
PKD 370/14/5,00-V DG	12590.4	45	PKD 750/19/5,08-V DG	12795.4	51	PKD 790/20/5,00-V DG	12704.4	46
PKD 370/14/5,00-V GN	12590.1	45	PKD 750/19/5,08-V GN	12795.1	51	PKD 790/20/5,00-V GN	12704.1	46
PKD 370/15/5,00-V DG	12591.4	45	PKD 750/2/5,00-V DG	10489.4	45	PKD 790/21/5,00-V DG	13172.4	46
PKD 370/15/5,00-V GN	12591.1	45	PKD 750/2/5,00-V GN	10489.1	45	PKD 790/21/5,00-V GN	13172.1	46
PKD 370/16/5,00-V DG	12592.4	45	PKD 750/2/5,08-V DG	10500.4	51	PKD 790/22/5,00-V DG	12705.4	46
PKD 370/16/5,00-V GN	12592.1	45	PKD 750/2/5,08-V GN	10500.1	51	PKD 790/22/5,00-V GN	12705.1	46
PKD 370/17/5,00-V DG	12593.4	45	PKD 750/20/5,00-V DG	12688.4	45	PKD 790/23/5,00-V DG	13173.4	46
PKD 370/17/5,00-V GN	12593.1	45	PKD 750/20/5,00-V GN	12688.1	45	PKD 790/23/5,00-V GN	13173.1	46
PKD 370/18/5,00-V DG	12594.4	45	PKD 750/20/5,08-V DG	12796.4	51	PKD 790/24/5,00-V DG	12706.4	46
PKD 370/18/5,00-V GN	12594.1	45	PKD 750/20/5,08-V GN	12796.1	51	PKD 790/24/5,00-V GN	12706.1	46
PKD 370/19/5,00-V DG	12595.4	45	PKD 750/21/5,00-V DG	12689.4	45	PKD 790/3/5,00-V DG	13163.4	46
PKD 370/19/5,00-V GN	12595.1	45	PKD 750/21/5,00-V GN	12689.1	45	PKD 790/3/5,00-V GN	13163.1	46
PKD 370/2/5,00-V DG	10412.4	45	PKD 750/21/5,08-V DG	12797.4	51	PKD 790/4/5,00-V DG	10512.4	46
PKD 370/2/5,00-V GN	10412.1	45	PKD 750/21/5,08-V GN	12797.1	51	PKD 790/4/5,00-V GN	10512.1	46
PKD 370/20/5,00-V DG	12596.4	45	PKD 750/22/5,00-V DG	12690.4	45	PKD 790/5/5,00-V DG	13164.4	46
PKD 370/20/5,00-V GN	12596.1	45	PKD 750/22/5,00-V GN	12690.1	45	PKD 790/5/5,00-V GN	13164.1	46
PKD 370/21/5,00-V DG	12597.4	45	PKD 750/22/5,08-V DG	12798.4	51	PKD 790/6/5,00-V DG	10513.4	46
PKD 370/21/5,00-V GN	12597.1	45	PKD 750/22/5,08-V GN	12798.1	51	PKD 790/6/5,00-V GN	10513.1	46
PKD 370/22/5,00-V DG	12598.4	45	PKD 750/23/5,00-V DG	12691.4	45	PKD 790/7/5,00-V DG	13165.4	46
PKD 370/22/5,00-V GN	12598.1	45	PKD 750/23/5,00-V GN	12691.1	45	PKD 790/7/5,00-V GN	13165.1	46
PKD 370/23/5,00-V DG	12599.4	45	PKD 750/23/5,08-V DG	12799.4	51	PKD 790/8/5,00-V DG	10514.4	46
PKD 370/23/5,00-V GN	12599.1	45	PKD 750/23/5,08-V GN	12799.1	51	PKD 790/8/5,00-V GN	10514.1	46
PKD 370/24/5,00-V DG	12600.4	45	PKD 750/24/5,00-V DG	12692.4	45	PKD 790/9/5,00-V DG	13166.4	46
PKD 370/24/5,00-V GN	12600.1	45	PKD 750/24/5,00-V GN	12692.1	45	PKD 790/9/5,00-V GN	13166.1	46
PKD 370/3/5,00-V DG	10413.4	45	PKD 750/24/5,08-V DG	12800.4	51	PKDL 2,5/10/5,00 GN	5210.1	47
PKD 370/3/5,00-V GN	10413.1	45	PKD 750/24/5,08-V GN	12800.1	51	PKDL 2,5/10/5,08 GN	5310.1	51
PKD 370/4/5,00-V DG	10414.4	45	PKD 750/3/5,00-V DG	10490.4	45	PKDL 2,5/12/5,00 GN	5212.1	47
PKD 370/4/5,00-V GN	10414.1	45	PKD 750/3/5,00-V GN	10490.1	45	PKDL 2,5/12/5,08 GN	5312.1	51
PKD 370/5/5,00-V DG	10415.4	45	PKD 750/3/5,08-V DG	10501.4	51	PKDL 2,5/14/5,00 GN	5214.1	47
PKD 370/5/5,00-V GN	10415.1	45	PKD 750/3/5,08-V GN	10501.1	51	PKDL 2,5/14/5,08 GN	5314.1	51
PKD 370/6/5,00-V DG	10416.4	45	PKD 750/4/5,00-V DG	10491.4	45	PKDL 2,5/16/5,00 GN	5216.1	47
PKD 370/6/5,00-V GN	10416.1	45	PKD 750/4/5,00-V GN	10491.1	45	PKDL 2,5/16/5,08 GN	5316.1	51
PKD 370/7/5,00-V DG	10417.4	45	PKD 750/4/5,08-V DG	10502.4	51	PKDL 2,5/18/5,00 GN	5218.1	47
PKD 370/7/5,00-V GN	10417.1	45	PKD 750/4/5,08-V GN	10502.1	51	PKDL 2,5/18/5,08 GN	5318.1	51
PKD 370/8/5,00-V DG	10418.4	45	PKD 750/5/5,00-V DG	10492.4	45	PKDL 2,5/20/5,00 GN	5220.1	47
PKD 370/8/5,00-V GN	10418.1	45	PKD 750/5/5,00-V GN	10492.1	45	PKDL 2,5/20/5,08 GN	5320.1	51
PKD 370/9/5,00-V DG	10419.4	45	PKD 750/5/5,08-V DG	10503.4	51	PKDL 2,5/22/5,00 GN	5222.1	47
PKD 370/9/5,00-V GN	10419.1	45	PKD 750/5/5,08-V GN	10503.1	51	PKDL 2,5/22/5,08 GN	5322.1	51
PKD 750/10/5,00-V DG	10497.4	45	PKD 750/6/5,00-V DG	10493.4	45	PKDL 2,5/24/5,00 GN	5224.1	47
PKD 750/10/5,00-V GN	10497.1	45	PKD 750/6/5,00-V GN	10493.1	45	PKDL 2,5/24/5,08 GN	5324.1	51
PKD 750/10/5,08-V DG	10508.4	51	PKD 750/6/5,08-V DG	10504.4	51	PKDL 2,5/4/5,00 GN	5204.1	47
PKD 750/10/5,08-V GN	10508.1	51	PKD 750/6/5,08-V GN	10504.1	51	PKDL 2,5/4/5,08 GN	5304.1	51
PKD 750/11/5,00-V DG	10498.4	45	PKD 750/7/5,00-V DG	10494.4	45	PKDL 2,5/6/5,00 GN	5206.1	47
PKD 750/11/5,00-V GN	10498.1	45	PKD 750/7/5,00-V GN	10494.1	45	PKDL 2,5/6/5,08 GN	5306.1	51
PKD 750/11/5,08-V DG	10509.4	51	PKD 750/7/5,08-V DG	10505.4	51	PKDL 2,5/8/5,00 GN	5208.1	47
PKD 750/11/5,08-V GN	10509.1	51	PKD 750/7/5,08-V GN	10505.1	51	PKDL 2,5/8/5,08 GN	5308.1	51
PKD 750/12/5,00-V DG	10499.4	45	PKD 750/8/5,00-V DG	10495.4	45	PKDR 2,5/10/5,00 OG	5210.3	47
PKD 750/12/5,00-V GN	10499.1	45	PKD 750/8/5,00-V GN	10495.1	45	PKDR 2,5/10/5,08 OG	5310.3	52
PKD 750/12/5,08-V DG	10510.4	51	PKD 750/8/5,08-V DG	10506.4	51	PKDR 2,5/12/5,00 OG	5212.3	47
PKD 750/12/5,08-V GN	10510.1	51	PKD 750/8/5,08-V GN	10506.1	51	PKDR 2,5/12/5,08 OG	5312.3	52
PKD 750/13/5,00-V DG	12681.4	45	PKD 750/9/5,00-V DG	10496.4	45	PKDR 2,5/14/5,00 OG	5214.3	47
PKD 750/13/5,00-V GN	12681.1	45	PKD 750/9/5,00-V GN	10496.1	45	PKDR 2,5/14/5,08 OG	5314.3	52
PKD 750/13/5,08-V DG	12789.4	51	PKD 750/9/5,08-V DG	10507.4	51	PKDR 2,5/16/5,00 OG	5216.3	47
PKD 750/13/5,08-V GN	12789.1	51	PKD 750/9/5,08-V GN	10507.1	51	PKDR 2,5/16/5,08 OG	5316.3	52
PKD 750/14/5,00-V DG	12682.4	45	PKD 790/10/5,00-V DG	10515.4	46	PKDR 2,5/18/5,00 OG	5218.3	47
PKD 750/14/5,00-V GN	12682.1	45	PKD 790/10/5,00-V GN	10515.1	46	PKDR 2,5/18/5,08 OG	5318.3	52
PKD 750/14/5,08-V DG	12790.4	51	PKD 790/11/5,00-V DG	13167.4	46	PKDR 2,5/20/5,00 OG	5220.3	47
PKD 750/14/5,08-V GN	12790.1	51	PKD 790/11/5,00-V GN	13167.1	46	PKDR 2,5/20/5,08 OG	5320.3	52
PKD 750/15/5,00-V DG	12683.4	45	PKD 790/12/5,00-V DG	10516.4	46	PKDR 2,5/22/5,00 OG	5222.3	47
PKD 750/15/5,00-V GN	12683.1	45	PKD 790/12/5,00-V GN	10516.1	46	PKDR 2,5/22/5,08 OG	5322.3	52
PKD 750/15/5,08-V DG	12791.4	51	PKD 790/13/5,00-V DG	13168.4	46	PKDR 2,5/24/5,00 OG	5224.3	47
PKD 750/15/5,08-V GN	12791.1	51	PKD 790/13/5,00-V GN	13168.1	46	PKDR 2,5/24/5,08 OG	5324.3	52
PKD 750/16/5,00-V DG	12684.4	45	PKD 790/14/5,00-V DG	12701.4	46	PKDR 2,5/4/5,00 OG	5204.3	47
PKD 750/16/5,00-V GN	12684.1	45	PKD 790/14/5,00-V GN	12701.1	46	PKDR 2,5/4/5,08 OG	5304.3	52
PKD 750/16/5,08-V DG	12792.4	51	PKD 790/15/5,00-V DG	13169.4	46	PKDR 2,5/6/5,00 OG	5206.3	47
PKD 750/16/5,08-V GN	12792.1	51	PKD 790/15/5,00-V GN	13169.1	46	PKDR 2,5/6/5,08 OG	5306.3	52
PKD 750/17/5,00-V DG	12685.4	45	PKD 790/16/5,00-V DG	12702.4	46	PKDR 2,5/8/5,00 OG	5208.3	47
PKD 750/17/5,00-V GN	12685.1	45	PKD 790/16/5,00-V GN	12702.1	46	PKDR 2,5/8/5,08 OG	5308.3	52
PKD 750/17/5,08-V DG	12793.4	51	PKD 790/17/5,00-V DG	13170.4	46	PKDZ 770/10/5,08-V GN	12932.1	52
PKD 750/17/5,08-V GN	12793.1	51	PKD 790/17/5,00-V GN	13170.1	46	PKDZ 770/11/5,08-V GN	12933.1	52
PKD 750/18/5,00-V DG	12686.4	45	PKD 790/18/5,00-V DG	12703.4	46	PKDZ 770/12/5,08-V GN	12934.1	52
PKD 750/18/5,00-V GN	12686.1	45	PKD 790/18/5,00-V GN	12703.1	46	PKDZ 770/13/5,08-V GN	12935.1	52
PKD 750/18/5,08-V DG	12794.4	51	PKD 790/19/5,00-V DG	13171.4	46	PKDZ 770/14/5,08-V GN	12936.1	52

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PKDZ 770/15/5,08-V GN	12937.1	52	PKT 2200/15/7,50-H GN	10631.1	63	PKT 2200/5/5,00-H GN	10573.1	62
PKDZ 770/16/5,08-V GN	12938.1	52	PKT 2200/15/7,50-V GN	10607.1	63	PKT 2200/5/5,00-V GN	10549.1	62
PKDZ 770/17/5,08-V GN	12939.1	52	PKT 2200/16/10,00-H GN	10680.1	64	PKT 2200/5/7,50-H GN	10621.1	63
PKDZ 770/18/5,08-V GN	12940.1	52	PKT 2200/16/10,00-V GN	10656.1	64	PKT 2200/5/7,50-V GN	10597.1	63
PKDZ 770/19/5,08-V GN	12941.1	52	PKT 2200/16/5,00-H GN	10584.1	62	PKT 2200/6/10,00-H GN	10670.1	64
PKDZ 770/2/5,08-V GN	12924.1	52	PKT 2200/16/5,00-V GN	10560.1	62	PKT 2200/6/10,00-V GN	10646.1	64
PKDZ 770/20/5,08-V GN	12942.1	52	PKT 2200/16/7,50-H GN	10632.1	63	PKT 2200/6/5,00-H GN	10574.1	62
PKDZ 770/21/5,08-V GN	12943.1	52	PKT 2200/16/7,50-V GN	10608.1	63	PKT 2200/6/5,00-V GN	10550.1	62
PKDZ 770/22/5,08-V GN	12944.1	52	PKT 2200/17/10,00-H GN	10681.1	64	PKT 2200/6/7,50-H GN	10622.1	63
PKDZ 770/23/5,08-V GN	12945.1	52	PKT 2200/17/10,00-V GN	10657.1	64	PKT 2200/6/7,50-V GN	10598.1	63
PKDZ 770/24/5,08-V GN	12946.1	52	PKT 2200/17/5,00-H GN	10585.1	62	PKT 2200/7/10,00-H GN	10671.1	64
PKDZ 770/3/5,08-V GN	12925.1	52	PKT 2200/17/5,00-V GN	10561.1	62	PKT 2200/7/10,00-V GN	10647.1	64
PKDZ 770/4/5,08-V GN	12926.1	52	PKT 2200/17/7,50-H GN	10633.1	63	PKT 2200/7/5,00-H GN	10575.1	62
PKDZ 770/5/5,08-V GN	12927.1	52	PKT 2200/17/7,50-V GN	10609.1	63	PKT 2200/7/5,00-V GN	10551.1	62
PKDZ 770/6/5,08-V GN	12928.1	52	PKT 2200/18/10,00-H GN	10682.1	64	PKT 2200/7/7,50-H GN	10623.1	63
PKDZ 770/7/5,08-V GN	12929.1	52	PKT 2200/18/10,00-V GN	10658.1	64	PKT 2200/7/7,50-V GN	10599.1	63
PKDZ 770/8/5,08-V GN	12930.1	52	PKT 2200/18/5,00-H GN	10586.1	62	PKT 2200/8/10,00-H GN	10672.1	64
PKDZ 770/9/5,08-V GN	12931.1	52	PKT 2200/18/5,00-V GN	10562.1	62	PKT 2200/8/10,00-V GN	10648.1	64
PKH 793/10/5,00-V DG	10521.4	46	PKT 2200/18/7,50-H GN	10634.1	63	PKT 2200/8/5,00-H GN	10576.1	62
PKH 793/10/5,00-V GN	10521.1	46	PKT 2200/18/7,50-V GN	10610.1	63	PKT 2200/8/5,00-V GN	10552.1	62
PKH 793/12/5,00-V DG	10522.4	46	PKT 2200/19/10,00-H GN	10683.1	64	PKT 2200/8/7,50-H GN	10624.1	63
PKH 793/12/5,00-V GN	10522.1	46	PKT 2200/19/10,00-V GN	10659.1	64	PKT 2200/8/7,50-V GN	10600.1	63
PKH 793/14/5,00-V DG	12708.4	46	PKT 2200/19/5,00-H GN	10587.1	62	PKT 2200/9/10,00-H GN	10673.1	64
PKH 793/14/5,00-V GN	12708.1	46	PKT 2200/19/5,00-V GN	10563.1	62	PKT 2200/9/10,00-V GN	10649.1	64
PKH 793/16/5,00-V DG	12709.4	46	PKT 2200/19/7,50-H GN	10635.1	63	PKT 2200/9/5,00-H GN	10577.1	62
PKH 793/16/5,00-V GN	12709.1	46	PKT 2200/19/7,50-V GN	10611.1	63	PKT 2200/9/5,00-V GN	10553.1	62
PKH 793/18/5,00-V DG	12710.4	46	PKT 2200/2/10,00-H GN	10666.1	64	PKT 2200/9/7,50-H GN	10625.1	63
PKH 793/18/5,00-V GN	12710.1	46	PKT 2200/2/10,00-V GN	10642.1	64	PKT 2200/9/7,50-V GN	10601.1	63
PKH 793/2/5,00-V DG	10517.4	46	PKT 2200/2/5,00-H GN	10570.1	62	PKZ 601/10/3,81-V GN	31460.1	40
PKH 793/2/5,00-V GN	10517.1	46	PKT 2200/2/5,00-V GN	10546.1	62	PKZ 601/11/3,81-V GN	31461.1	40
PKH 793/20/5,00-V DG	12711.4	46	PKT 2200/2/7,50-H GN	10618.1	63	PKZ 601/12/3,81-V GN	31462.1	40
PKH 793/20/5,00-V GN	12711.1	46	PKT 2200/2/7,50-V GN	10594.1	63	PKZ 601/13/3,81-V GN	31463.1	40
PKH 793/22/5,00-V DG	12712.4	46	PKT 2200/20/10,00-H GN	10684.1	64	PKZ 601/14/3,81-V GN	31464.1	40
PKH 793/22/5,00-V GN	12712.1	46	PKT 2200/20/10,00-V GN	10660.1	64	PKZ 601/15/3,81-V GN	31465.1	40
PKH 793/24/5,00-V DG	12713.4	46	PKT 2200/20/5,00-H GN	10588.1	62	PKZ 601/16/3,81-V GN	31466.1	40
PKH 793/24/5,00-V GN	12713.1	46	PKT 2200/20/5,00-V GN	10564.1	62	PKZ 601/17/3,81-V GN	31467.1	40
PKH 793/4/5,00-V DG	10518.4	46	PKT 2200/20/7,50-H GN	10636.1	63	PKZ 601/18/3,81-V GN	31468.1	40
PKH 793/4/5,00-V GN	10518.1	46	PKT 2200/20/7,50-V GN	10612.1	63	PKZ 601/19/3,81-V GN	31469.1	40
PKH 793/6/5,00-V DG	10519.4	46	PKT 2200/21/10,00-H GN	10685.1	64	PKZ 601/2/3,81-V GN	31452.1	40
PKH 793/6/5,00-V GN	10519.1	46	PKT 2200/21/10,00-V GN	10661.1	64	PKZ 601/20/3,81-V GN	31470.1	40
PKH 793/8/5,00-V DG	10520.4	46	PKT 2200/21/5,00-H GN	10589.1	62	PKZ 601/21/3,81-V GN	31471.1	40
PKH 793/8/5,00-V GN	10520.1	46	PKT 2200/21/5,00-V GN	10565.1	62	PKZ 601/22/3,81-V GN	31472.1	40
PKT 2200/10/10,00-H GN	10674.1	64	PKT 2200/21/7,50-H GN	10637.1	63	PKZ 601/23/3,81-V GN	31473.1	40
PKT 2200/10/10,00-V GN	10650.1	64	PKT 2200/21/7,50-V GN	10613.1	63	PKZ 601/24/3,81-V GN	31474.1	40
PKT 2200/10/5,00-H GN	10578.1	62	PKT 2200/22/10,00-H GN	10686.1	64	PKZ 601/3/3,81-V GN	31453.1	40
PKT 2200/10/5,00-V GN	10554.1	62	PKT 2200/22/10,00-V GN	10662.1	64	PKZ 601/4/3,81-V GN	31454.1	40
PKT 2200/10/7,50-H GN	10626.1	63	PKT 2200/22/5,00-H GN	10590.1	62	PKZ 601/5/3,81-V GN	31455.1	40
PKT 2200/10/7,50-V GN	10602.1	63	PKT 2200/22/5,00-V GN	10566.1	62	PKZ 601/6/3,81-V GN	31456.1	40
PKT 2200/11/10,00-H GN	10675.1	64	PKT 2200/22/7,50-H GN	10638.1	63	PKZ 601/7/3,81-V GN	31457.1	40
PKT 2200/11/10,00-V GN	10651.1	64	PKT 2200/22/7,50-V GN	10614.1	63	PKZ 601/8/3,81-V GN	31458.1	40
PKT 2200/11/5,00-H GN	10579.1	62	PKT 2200/23/10,00-H GN	10687.1	64	PKZ 601/9/3,81-V GN	31459.1	40
PKT 2200/11/5,00-V GN	10555.1	62	PKT 2200/23/10,00-V GN	10663.1	64	PKZ 602/10/3,81-V GN	12886.1	40
PKT 2200/11/7,50-H GN	10627.1	63	PKT 2200/23/5,00-H GN	10591.1	62	PKZ 602/11/3,81-V GN	12887.1	40
PKT 2200/11/7,50-V GN	10603.1	63	PKT 2200/23/5,00-V GN	10567.1	62	PKZ 602/12/3,81-V GN	12888.1	40
PKT 2200/12/10,00-H GN	10676.1	64	PKT 2200/23/7,50-H GN	10639.1	63	PKZ 602/13/3,81-V GN	12889.1	40
PKT 2200/12/10,00-V GN	10652.1	64	PKT 2200/23/7,50-V GN	10615.1	63	PKZ 602/14/3,81-V GN	12890.1	40
PKT 2200/12/5,00-H GN	10580.1	62	PKT 2200/24/10,00-H GN	10688.1	64	PKZ 602/15/3,81-V GN	12891.1	40
PKT 2200/12/5,00-V GN	10556.1	62	PKT 2200/24/10,00-V GN	10664.1	64	PKZ 602/16/3,81-V GN	12892.1	40
PKT 2200/12/7,50-H GN	10628.1	63	PKT 2200/24/5,00-H GN	10592.1	62	PKZ 602/2/3,81-V GN	12878.1	40
PKT 2200/12/7,50-V GN	10604.1	63	PKT 2200/24/5,00-V GN	10568.1	62	PKZ 602/3/3,81-V GN	12879.1	40
PKT 2200/13/10,00-H GN	10677.1	64	PKT 2200/24/7,50-H GN	10640.1	63	PKZ 602/4/3,81-V GN	12880.1	40
PKT 2200/13/10,00-V GN	10653.1	64	PKT 2200/24/7,50-V GN	10616.1	63	PKZ 602/5/3,81-V GN	12881.1	40
PKT 2200/13/5,00-H GN	10581.1	62	PKT 2200/3/10,00-H GN	10667.1	64	PKZ 602/6/3,81-V GN	12882.1	40
PKT 2200/13/5,00-V GN	10557.1	62	PKT 2200/3/10,00-V GN	10643.1	64	PKZ 602/7/3,81-V GN	12883.1	40
PKT 2200/13/7,50-H GN	10629.1	63	PKT 2200/3/5,00-H GN	10571.1	62	PKZ 602/8/3,81-V GN	12884.1	40
PKT 2200/13/7,50-V GN	10605.1	63	PKT 2200/3/5,00-V GN	10547.1	62	PKZ 602/9/3,81-V GN	12885.1	40
PKT 2200/14/10,00-H GN	10678.1	64	PKT 2200/3/7,50-H GN	10619.1	63	PKZ 692/10/2,54-V GN	14108.1	38
PKT 2200/14/10,00-V GN	10654.1	64	PKT 2200/3/7,50-V GN	10595.1	63	PKZ 692/11/2,54-V GN	14109.1	38
PKT 2200/14/5,00-H GN	10582.1	62	PKT 2200/4/10,00-H GN	10668.1	64	PKZ 692/12/2,54-V GN	14110.1	38
PKT 2200/14/5,00-V GN	10558.1	62	PKT 2200/4/10,00-V GN	10644.1	64	PKZ 692/13/2,54-V GN	14111.1	38
PKT 2200/14/7,50-H GN	10630.1	63	PKT 2200/4/5,00-H GN	10572.1	62	PKZ 692/14/2,54-V GN	14112.1	38
PKT 2200/14/7,50-V GN	10606.1	63	PKT 2200/4/5,00-V GN	10548.1	62	PKZ 692/15/2,54-V GN	14113.1	38
PKT 2200/15/10,00-H GN	10679.1	64	PKT 2200/4/7,50-H GN	10620.1	63	PKZ 692/16/2,54-V GN	14114.1	38
PKT 2200/15/10,00-V GN	10655.1	64	PKT 2200/4/7,50-V GN	10596.1	63	PKZ 692/17/2,54-V GN	14115.1	38
PKT 2200/15/5,00-H GN	10583.1	62	PKT 2200/5/10,00-H GN	10669.1	64	PKZ 692/18/2,54-V GN	14117.1	38
PKT 2200/15/5,00-V GN	10559.1	62	PKT 2200/5/10,00-V GN	10645.1	64	PKZ 692/19/2,54-V GN	14118.1	38

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PKZ 692/2/2,54-V GN	14100.1	38	PZK 3000/13/5,00/5,08 GN	10701.1	27	PZK 3001/17/5,00/5,08-FD LG	10849.0	28
PKZ 692/20/2,54-V GN	14119.1	38	PZK 3000/13/5,00/5,08 LG	10701.0	27	PZK 3001/17/5,00/5,08-KD GN	10801.1	27
PKZ 692/21/2,54-V GN	14120.1	38	PZK 3000/14/5,00/5,08 GN	10702.1	27	PZK 3001/17/5,00/5,08-KD LG	10801.0	27
PKZ 692/22/2,54-V GN	14121.1	38	PZK 3000/14/5,00/5,08 LG	10702.0	27	PZK 3001/17/5,00/5,08-WD GN	30787.1	28
PKZ 692/23/2,54-V GN	14122.1	38	PZK 3000/15/5,00/5,08 GN	10703.1	27	PZK 3001/18/5,00/5,08-FD GN	10850.1	28
PKZ 692/24/2,54-V GN	14116.1	38	PZK 3000/15/5,00/5,08 LG	10703.0	27	PZK 3001/18/5,00/5,08-FD LG	10850.0	28
PKZ 692/3/2,54-V GN	14101.1	38	PZK 3000/16/5,00/5,08 GN	10704.1	27	PZK 3001/18/5,00/5,08-KD GN	10802.1	27
PKZ 692/4/2,54-V GN	14102.1	38	PZK 3000/16/5,00/5,08 LG	10704.0	27	PZK 3001/18/5,00/5,08-KD LG	10802.0	27
PKZ 692/5/2,54-V GN	14103.1	38	PZK 3000/17/5,00/5,08 GN	10705.1	27	PZK 3001/18/5,00/5,08-WD GN	30788.1	28
PKZ 692/6/2,54-V GN	14104.1	38	PZK 3000/17/5,00/5,08 LG	10705.0	27	PZK 3001/19/5,00/5,08-FD GN	10851.1	28
PKZ 692/7/2,54-V GN	14105.1	38	PZK 3000/18/5,00/5,08 GN	10706.1	27	PZK 3001/19/5,00/5,08-FD LG	10851.0	28
PKZ 692/8/2,54-V GN	14106.1	38	PZK 3000/18/5,00/5,08 LG	10706.0	27	PZK 3001/19/5,00/5,08-KD GN	10803.1	27
PKZ 692/9/2,54-V GN	14107.1	38	PZK 3000/19/5,00/5,08 GN	10707.1	27	PZK 3001/19/5,00/5,08-KD LG	10803.0	27
PKZ 840/10/6,35-V GN	10531.1	53	PZK 3000/19/5,00/5,08 LG	10707.0	27	PZK 3001/19/5,00/5,08-WD GN	30789.1	28
PKZ 840/11/6,35-V GN	10532.1	53	PZK 3000/2/5,00/5,08 GN	10690.1	27	PZK 3001/2/5,00/5,08-FD GN	10834.1	28
PKZ 840/12/6,35-V GN	10533.1	53	PZK 3000/2/5,00/5,08 LG	10690.0	27	PZK 3001/2/5,00/5,08-FD LG	10834.0	28
PKZ 840/13/6,35-V GN	12714.1	53	PZK 3000/20/5,00/5,08 GN	10708.1	27	PZK 3001/2/5,00/5,08-KD GN	10786.1	27
PKZ 840/14/6,35-V GN	12715.1	53	PZK 3000/20/5,00/5,08 LG	10708.0	27	PZK 3001/2/5,00/5,08-KD LG	10786.0	27
PKZ 840/15/6,35-V GN	12716.1	53	PZK 3000/21/5,00/5,08 GN	10709.1	27	PZK 3001/2/5,00/5,08-WD GN	30772.1	28
PKZ 840/16/6,35-V GN	12717.1	53	PZK 3000/21/5,00/5,08 LG	10709.0	27	PZK 3001/20/5,00/5,08-FD GN	10852.1	28
PKZ 840/2/6,35-V GN	10523.1	53	PZK 3000/22/5,00/5,08 GN	10710.1	27	PZK 3001/20/5,00/5,08-FD LG	10852.0	28
PKZ 840/3/6,35-V GN	10524.1	53	PZK 3000/22/5,00/5,08 LG	10710.0	27	PZK 3001/20/5,00/5,08-KD GN	10804.1	27
PKZ 840/4/6,35-V GN	10525.1	53	PZK 3000/23/5,00/5,08 GN	10711.1	27	PZK 3001/20/5,00/5,08-KD LG	10804.0	27
PKZ 840/5/6,35-V GN	10526.1	53	PZK 3000/23/5,00/5,08 LG	10711.0	27	PZK 3001/20/5,00/5,08-WD GN	30790.1	28
PKZ 840/6/6,35-V GN	10527.1	53	PZK 3000/24/5,00/5,08 GN	10712.1	27	PZK 3001/21/5,00/5,08-FD GN	10853.1	28
PKZ 840/7/6,35-V GN	10528.1	53	PZK 3000/24/5,00/5,08 LG	10712.0	27	PZK 3001/21/5,00/5,08-FD LG	10853.0	28
PKZ 840/8/6,35-V GN	10529.1	53	PZK 3000/3/5,00/5,08 GN	10691.1	27	PZK 3001/21/5,00/5,08-KD GN	10805.1	27
PKZ 840/9/6,35-V GN	10530.1	53	PZK 3000/3/5,00/5,08 LG	10691.0	27	PZK 3001/21/5,00/5,08-KD LG	10805.0	27
PKZ 841/10/9,52-V GN	10542.1	57	PZK 3000/4/5,00/5,08 GN	10692.1	27	PZK 3001/21/5,00/5,08-WD GN	30791.1	28
PKZ 841/11/9,52-V GN	10543.1	57	PZK 3000/4/5,00/5,08 LG	10692.0	27	PZK 3001/22/5,00/5,08-FD GN	10854.1	28
PKZ 841/12/9,52-V GN	10544.1	57	PZK 3000/5/5,00/5,08 GN	10693.1	27	PZK 3001/22/5,00/5,08-FD LG	10854.0	28
PKZ 841/13/9,52-V GN	12726.1	57	PZK 3000/5/5,00/5,08 LG	10693.0	27	PZK 3001/22/5,00/5,08-KD GN	10806.1	27
PKZ 841/14/9,52-V GN	12727.1	57	PZK 3000/6/5,00/5,08 GN	10694.1	27	PZK 3001/22/5,00/5,08-KD LG	10806.0	27
PKZ 841/15/9,52-V GN	12728.1	57	PZK 3000/6/5,00/5,08 LG	10694.0	27	PZK 3001/22/5,00/5,08-WD GN	30792.1	28
PKZ 841/16/9,52-V GN	12729.1	57	PZK 3000/7/5,00/5,08 GN	10695.1	27	PZK 3001/23/5,00/5,08-FD GN	10855.1	28
PKZ 841/2/9,52-V GN	10534.1	57	PZK 3000/7/5,00/5,08 LG	10695.0	27	PZK 3001/23/5,00/5,08-FD LG	10855.0	28
PKZ 841/3/9,52-V GN	10535.1	57	PZK 3000/8/5,00/5,08 GN	10696.1	27	PZK 3001/23/5,00/5,08-KD GN	10807.1	27
PKZ 841/4/9,52-V GN	10536.1	57	PZK 3000/8/5,00/5,08 LG	10696.0	27	PZK 3001/23/5,00/5,08-KD LG	10807.0	27
PKZ 841/5/9,52-V GN	10537.1	57	PZK 3000/9/5,00/5,08 GN	10697.1	27	PZK 3001/23/5,00/5,08-WD GN	30793.1	28
PKZ 841/6/9,52-V GN	10538.1	57	PZK 3000/9/5,00/5,08 LG	10697.0	27	PZK 3001/24/5,00/5,08-FD GN	10856.1	28
PKZ 841/7/9,52-V GN	10539.1	57	PZK 3001/10/5,00/5,08-FD GN	10842.1	28	PZK 3001/24/5,00/5,08-FD LG	10856.0	28
PKZ 841/8/9,52-V GN	10540.1	57	PZK 3001/10/5,00/5,08-FD LG	10842.0	28	PZK 3001/24/5,00/5,08-KD GN	10808.1	27
PKZ 841/9/9,52-V GN	10541.1	57	PZK 3001/10/5,00/5,08-KD GN	10794.1	27	PZK 3001/24/5,00/5,08-KD LG	10808.0	27
PMC BSTR 10x12/10 WH	9433.7	178-180	PZK 3001/10/5,00/5,08-KD LG	10794.0	27	PZK 3001/24/5,00/5,08-WD GN	30794.1	28
		181	PZK 3001/10/5,00/5,08-WD GN	30780.1	28	PZK 3001/3/5,00/5,08-FD GN	10835.1	28
PMC BSTR 8x12/21 WH	9410.7	176	PZK 3001/11/5,00/5,08-FD GN	10843.1	28	PZK 3001/3/5,00/5,08-FD LG	10835.0	28
		177	PZK 3001/11/5,00/5,08-FD LG	10843.0	28	PZK 3001/3/5,00/5,08-KD GN	10787.1	27
PZB 3950/10/5,00 GN	11420.1	98	PZK 3001/11/5,00/5,08-KD GN	10795.1	27	PZK 3001/3/5,00/5,08-KD LG	10787.0	27
PZB 3950/11/5,00 GN	11421.1	98	PZK 3001/11/5,00/5,08-KD LG	10795.0	27	PZK 3001/3/5,00/5,08-WD GN	30773.1	28
PZB 3950/12/5,00 GN	11422.1	98	PZK 3001/11/5,00/5,08-WD GN	30781.1	28	PZK 3001/4/5,00/5,08-FD GN	10836.1	28
PZB 3950/13/5,00 GN	11423.1	98	PZK 3001/12/5,00/5,08-FD GN	10844.1	28	PZK 3001/4/5,00/5,08-FD LG	10836.0	28
PZB 3950/14/5,00 GN	11424.1	98	PZK 3001/12/5,00/5,08-FD LG	10844.0	28	PZK 3001/4/5,00/5,08-KD GN	10788.1	27
PZB 3950/15/5,00 GN	11425.1	98	PZK 3001/12/5,00/5,08-KD GN	10796.1	27	PZK 3001/4/5,00/5,08-KD LG	10788.0	27
PZB 3950/16/5,00 GN	11426.1	98	PZK 3001/12/5,00/5,08-KD LG	10796.0	27	PZK 3001/4/5,00/5,08-WD GN	30774.1	28
PZB 3950/17/5,00 GN	11427.1	98	PZK 3001/12/5,00/5,08-WD GN	30782.1	28	PZK 3001/5/5,00/5,08-FD GN	10837.1	28
PZB 3950/18/5,00 GN	11428.1	98	PZK 3001/13/5,00/5,08-FD GN	10845.1	28	PZK 3001/5/5,00/5,08-FD LG	10837.0	28
PZB 3950/19/5,00 GN	11429.1	98	PZK 3001/13/5,00/5,08-FD LG	10845.0	28	PZK 3001/5/5,00/5,08-KD GN	10789.1	27
PZB 3950/2/5,00 GN	11412.1	98	PZK 3001/13/5,00/5,08-KD GN	10797.1	27	PZK 3001/5/5,00/5,08-KD LG	10789.0	27
PZB 3950/20/5,00 GN	11430.1	98	PZK 3001/13/5,00/5,08-KD LG	10797.0	27	PZK 3001/5/5,00/5,08-WD GN	30775.1	28
PZB 3950/21/5,00 GN	11431.1	98	PZK 3001/13/5,00/5,08-WD GN	30783.1	28	PZK 3001/6/5,00/5,08-FD GN	10838.1	28
PZB 3950/22/5,00 GN	11432.1	98	PZK 3001/14/5,00/5,08-FD GN	10846.1	28	PZK 3001/6/5,00/5,08-FD LG	10838.0	28
PZB 3950/23/5,00 GN	11433.1	98	PZK 3001/14/5,00/5,08-FD LG	10846.0	28	PZK 3001/6/5,00/5,08-KD GN	10790.1	27
PZB 3950/24/5,00 GN	11434.1	98	PZK 3001/14/5,00/5,08-KD GN	10798.1	27	PZK 3001/6/5,00/5,08-KD LG	10790.0	27
PZB 3950/3/5,00 GN	11413.1	98	PZK 3001/14/5,00/5,08-KD LG	10798.0	27	PZK 3001/6/5,00/5,08-WD GN	30776.1	28
PZB 3950/4/5,00 GN	11414.1	98	PZK 3001/14/5,00/5,08-WD GN	30784.1	28	PZK 3001/7/5,00/5,08-FD GN	10839.1	28
PZB 3950/5/5,00 GN	11415.1	98	PZK 3001/15/5,00/5,08-FD GN	10847.1	28	PZK 3001/7/5,00/5,08-FD LG	10839.0	28
PZB 3950/6/5,00 GN	11416.1	98	PZK 3001/15/5,00/5,08-FD LG	10847.0	28	PZK 3001/7/5,00/5,08-KD GN	10791.1	27
PZB 3950/7/5,00 GN	11417.1	98	PZK 3001/15/5,00/5,08-KD GN	10799.1	27	PZK 3001/7/5,00/5,08-KD LG	10791.0	27
PZB 3950/8/5,00 GN	11418.1	98	PZK 3001/15/5,00/5,08-KD LG	10799.0	27	PZK 3001/7/5,00/5,08-WD GN	30777.1	28
PZB 3950/9/5,00 GN	11419.1	98	PZK 3001/15/5,00/5,08-WD GN	30785.1	28	PZK 3001/8/5,00/5,08-FD GN	10840.1	28
PZK 3000/10/5,00/5,08 GN	10698.1	27	PZK 3001/16/5,00/5,08-FD GN	10848.1	28	PZK 3001/8/5,00/5,08-FD LG	10840.0	28
PZK 3000/10/5,00/5,08 LG	10698.0	27	PZK 3001/16/5,00/5,08-FD LG	10848.0	28	PZK 3001/8/5,00/5,08-KD GN	10792.1	27
PZK 3000/11/5,00/5,08 GN	10699.1	27	PZK 3001/16/5,00/5,08-KD GN	10800.1	27	PZK 3001/8/5,00/5,08-KD LG	10792.0	27
PZK 3000/11/5,00/5,08 LG	10699.0	27	PZK 3001/16/5,00/5,08-KD LG	10800.0	27	PZK 3001/8/5,00/5,08-WD GN	30778.1	28
PZK 3000/12/5,00/5,08 GN	10700.1	27	PZK 3001/16/5,00/5,08-WD GN	30786.1	28	PZK 3001/9/5,00/5,08-FD GN	10841.1	28
PZK 3000/12/5,00/5,08 LG	10700.0	27	PZK 3001/17/5,00/5,08-FD GN	10849.1	28	PZK 3001/9/5,00/5,08-FD LG	10841.0	28

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PZK 3001/9/5,00/5,08-KD GN	10793.1	27	PZK 3011/15/7,50/7,62-KD GN	10895.1	33	PZK 3011/7/7,50/7,62-KD LG	10887.0	33
PZK 3001/9/5,00/5,08-KD LG	10793.0	27	PZK 3011/15/7,50/7,62-KD LG	10895.0	33	PZK 3011/7/7,50/7,62-WD GN	31337.1	34
PZK 3001/9/5,00/5,08-WD GN	30779.1	28	PZK 3011/15/7,50/7,62-WD GN	31345.1	34	PZK 3011/8/7,50/7,62-FD GN	10936.1	34
PZK 3010/10/7,50/7,62 GN	10746.1	33	PZK 3011/16/7,50/7,62-FD GN	10944.1	34	PZK 3011/8/7,50/7,62-FD LG	10936.0	34
PZK 3010/10/7,50/7,62 LG	10746.0	33	PZK 3011/16/7,50/7,62-FD LG	10944.0	34	PZK 3011/8/7,50/7,62-KD GN	10888.1	33
PZK 3010/11/7,50/7,62 GN	10747.1	33	PZK 3011/16/7,50/7,62-KD GN	10896.1	33	PZK 3011/8/7,50/7,62-KD LG	10888.0	33
PZK 3010/11/7,50/7,62 LG	10747.0	33	PZK 3011/16/7,50/7,62-KD LG	10896.0	33	PZK 3011/8/7,50/7,62-WD GN	31338.1	34
PZK 3010/12/7,50/7,62 GN	10748.1	33	PZK 3011/16/7,50/7,62-WD GN	31346.1	34	PZK 3011/9/7,50/7,62-FD GN	10937.1	34
PZK 3010/12/7,50/7,62 LG	10748.0	33	PZK 3011/17/7,50/7,62-FD GN	10945.1	34	PZK 3011/9/7,50/7,62-FD LG	10937.0	34
PZK 3010/13/7,50/7,62 GN	10749.1	33	PZK 3011/17/7,50/7,62-FD LG	10945.0	34	PZK 3011/9/7,50/7,62-KD GN	10889.1	33
PZK 3010/13/7,50/7,62 LG	10749.0	33	PZK 3011/17/7,50/7,62-KD GN	10897.1	33	PZK 3011/9/7,50/7,62-KD LG	10889.0	33
PZK 3010/14/7,50/7,62 GN	10750.1	33	PZK 3011/17/7,50/7,62-KD LG	10897.0	33	PZK 3011/9/7,50/7,62-WD GN	31339.1	34
PZK 3010/14/7,50/7,62 LG	10750.0	33	PZK 3011/17/7,50/7,62-WD GN	31347.1	34	PZK 3020/10/10,00/10,16 GN	10986.1	35
PZK 3010/15/7,50/7,62 GN	10751.1	33	PZK 3011/18/7,50/7,62-FD GN	10946.1	34	PZK 3020/10/10,00/10,16 LG	10986.0	35
PZK 3010/15/7,50/7,62 LG	10751.0	33	PZK 3011/18/7,50/7,62-FD LG	10946.0	34	PZK 3020/11/10,00/10,16 GN	10987.1	35
PZK 3010/16/7,50/7,62 GN	10752.1	33	PZK 3011/18/7,50/7,62-KD LG	10898.0	33	PZK 3020/11/10,00/10,16 LG	10987.0	35
PZK 3010/16/7,50/7,62 LG	10752.0	33	PZK 3011/18/7,50/7,62-KD GN	10898.1	33	PZK 3020/12/10,00/10,16 GN	10988.1	35
PZK 3010/17/7,50/7,62 GN	10753.1	33	PZK 3011/18/7,50/7,62-WD GN	31348.1	34	PZK 3020/12/10,00/10,16 LG	10988.0	35
PZK 3010/17/7,50/7,62 LG	10753.0	33	PZK 3011/19/7,50/7,62-FD GN	10947.1	34	PZK 3020/13/10,00/10,16 GN	10989.1	35
PZK 3010/18/7,50/7,62 GN	10754.1	33	PZK 3011/19/7,50/7,62-FD LG	10947.0	34	PZK 3020/13/10,00/10,16 LG	10989.0	35
PZK 3010/18/7,50/7,62 LG	10754.0	33	PZK 3011/19/7,50/7,62-KD LG	10899.0	33	PZK 3020/14/10,00/10,16 GN	10990.1	35
PZK 3010/19/7,50/7,62 GN	10755.1	33	PZK 3011/19/7,50/7,62-KD GN	10899.1	33	PZK 3020/14/10,00/10,16 LG	10990.0	35
PZK 3010/19/7,50/7,62 LG	10755.0	33	PZK 3011/19/7,50/7,62-WD GN	31349.1	34	PZK 3020/15/10,00/10,16 GN	10991.1	35
PZK 3010/2/7,50/7,62 GN	10738.1	33	PZK 3011/2/7,50/7,62-FD GN	10930.1	34	PZK 3020/15/10,00/10,16 LG	10991.0	35
PZK 3010/2/7,50/7,62 LG	10738.0	33	PZK 3011/2/7,50/7,62-FD LG	10930.0	34	PZK 3020/16/10,00/10,16 GN	10992.1	35
PZK 3010/20/7,50/7,62 GN	10756.1	33	PZK 3011/2/7,50/7,62-KD GN	10882.1	33	PZK 3020/16/10,00/10,16 LG	10992.0	35
PZK 3010/20/7,50/7,62 LG	10756.0	33	PZK 3011/2/7,50/7,62-KD LG	10882.0	33	PZK 3020/17/10,00/10,16 GN	10993.1	35
PZK 3010/21/7,50/7,62 GN	10757.1	33	PZK 3011/2/7,50/7,62-WD GN	31332.1	34	PZK 3020/17/10,00/10,16 LG	10993.0	35
PZK 3010/21/7,50/7,62 LG	10757.0	33	PZK 3011/20/7,50/7,62-FD GN	10948.1	34	PZK 3020/18/10,00/10,16 GN	10994.1	35
PZK 3010/22/7,50/7,62 GN	10758.1	33	PZK 3011/20/7,50/7,62-FD LG	10948.0	34	PZK 3020/18/10,00/10,16 LG	10994.0	35
PZK 3010/22/7,50/7,62 LG	10758.0	33	PZK 3011/20/7,50/7,62-KD LG	10900.0	33	PZK 3020/19/10,00/10,16 GN	10995.1	35
PZK 3010/23/7,50/7,62 GN	10759.1	33	PZK 3011/20/7,50/7,62-KD GN	10900.1	33	PZK 3020/19/10,00/10,16 LG	10995.0	35
PZK 3010/23/7,50/7,62 LG	10759.0	33	PZK 3011/20/7,50/7,62-WD GN	31350.1	34	PZK 3020/2/10,00/10,16 GN	10978.1	35
PZK 3010/24/7,50/7,62 GN	10760.1	33	PZK 3011/21/7,50/7,62-FD GN	10949.1	34	PZK 3020/2/10,00/10,16 LG	10978.0	35
PZK 3010/24/7,50/7,62 LG	10760.0	33	PZK 3011/21/7,50/7,62-FD LG	10949.0	34	PZK 3020/20/10,00/10,16 GN	10996.1	35
PZK 3010/3/7,50/7,62 GN	10739.1	33	PZK 3011/21/7,50/7,62-KD LG	10901.0	33	PZK 3020/20/10,00/10,16 LG	10996.0	35
PZK 3010/3/7,50/7,62 LG	10739.0	33	PZK 3011/21/7,50/7,62-KD GN	10901.1	33	PZK 3020/21/10,00/10,16 GN	10997.1	35
PZK 3010/4/7,50/7,62 LG	10740.0	33	PZK 3011/21/7,50/7,62-WD GN	31351.1	34	PZK 3020/21/10,00/10,16 LG	10997.0	35
PZK 3010/4/7,50/7,62 GN	10740.1	33	PZK 3011/22/7,50/7,62-FD GN	10950.1	34	PZK 3020/22/10,00/10,16 GN	10998.1	35
PZK 3010/5/7,50/7,62 GN	10741.1	33	PZK 3011/22/7,50/7,62-FD LG	10950.0	34	PZK 3020/22/10,00/10,16 LG	10998.0	35
PZK 3010/5/7,50/7,62 LG	10741.0	33	PZK 3011/22/7,50/7,62-KD LG	10902.0	33	PZK 3020/23/10,00/10,16 GN	10999.1	35
PZK 3010/6/7,50/7,62 GN	10742.1	33	PZK 3011/22/7,50/7,62-KD GN	10902.1	33	PZK 3020/23/10,00/10,16 LG	10999.0	35
PZK 3010/6/7,50/7,62 LG	10742.0	33	PZK 3011/22/7,50/7,62-WD GN	31352.1	34	PZK 3020/24/10,00/10,16 GN	11000.1	35
PZK 3010/7/7,50/7,62 GN	10743.1	33	PZK 3011/23/7,50/7,62-FD GN	10951.1	34	PZK 3020/24/10,00/10,16 LG	11000.0	35
PZK 3010/7/7,50/7,62 LG	10743.0	33	PZK 3011/23/7,50/7,62-FD LG	10951.0	34	PZK 3020/3/10,00/10,16 GN	10979.1	35
PZK 3010/8/7,50/7,62 GN	10744.1	33	PZK 3011/23/7,50/7,62-KD LG	10903.0	33	PZK 3020/3/10,00/10,16 LG	10979.0	35
PZK 3010/8/7,50/7,62 LG	10744.0	33	PZK 3011/23/7,50/7,62-KD GN	10903.1	33	PZK 3020/4/10,00/10,16 GN	10980.1	35
PZK 3010/9/7,50/7,62 GN	10745.1	33	PZK 3011/23/7,50/7,62-WD GN	31353.1	34	PZK 3020/4/10,00/10,16 LG	10980.0	35
PZK 3010/9/7,50/7,62 LG	10745.0	33	PZK 3011/24/7,50/7,62-FD GN	10952.1	34	PZK 3020/5/10,00/10,16 GN	10981.1	35
PZK 3011/10/7,50/7,62-FD GN	10938.1	34	PZK 3011/24/7,50/7,62-FD LG	10952.0	34	PZK 3020/5/10,00/10,16 LG	10981.0	35
PZK 3011/10/7,50/7,62-FD LG	10938.0	34	PZK 3011/24/7,50/7,62-KD LG	10904.0	33	PZK 3020/6/10,00/10,16 GN	10982.1	35
PZK 3011/10/7,50/7,62-KD GN	10890.1	33	PZK 3011/24/7,50/7,62-KD GN	10904.1	33	PZK 3020/6/10,00/10,16 LG	10982.0	35
PZK 3011/10/7,50/7,62-KD LG	10890.0	33	PZK 3011/24/7,50/7,62-WD GN	31354.1	34	PZK 3020/7/10,00/10,16 GN	10983.1	35
PZK 3011/10/7,50/7,62-WD GN	31340.1	34	PZK 3011/3/7,50/7,62-FD GN	10931.1	34	PZK 3020/7/10,00/10,16 LG	10983.0	35
PZK 3011/11/7,50/7,62-FD GN	10939.1	34	PZK 3011/3/7,50/7,62-FD LG	10931.0	34	PZK 3020/8/10,00/10,16 GN	10984.1	35
PZK 3011/11/7,50/7,62-FD LG	10939.0	34	PZK 3011/3/7,50/7,62-KD GN	10883.1	33	PZK 3020/8/10,00/10,16 LG	10984.0	35
PZK 3011/11/7,50/7,62-KD GN	10891.1	33	PZK 3011/3/7,50/7,62-KD LG	10883.0	33	PZK 3020/9/10,00/10,16 GN	10985.1	35
PZK 3011/11/7,50/7,62-KD LG	10891.0	33	PZK 3011/3/7,50/7,62-WD GN	31333.1	34	PZK 3020/9/10,00/10,16 LG	10985.0	35
PZK 3011/11/7,50/7,62-WD GN	31341.1	34	PZK 3011/4/7,50/7,62-FD GN	10932.1	34	PZK 3021/10/10,00/10,16-KD GN	11034.1	35
PZK 3011/12/7,50/7,62-FD GN	10940.1	34	PZK 3011/4/7,50/7,62-FD LG	10932.0	34	PZK 3021/10/10,00/10,16-KD LG	11034.0	35
PZK 3011/12/7,50/7,62-FD LG	10940.0	34	PZK 3011/4/7,50/7,62-KD GN	10884.1	33	PZK 3021/10/10,00/10,16-WD GN	31310.1	36
PZK 3011/12/7,50/7,62-KD GN	10892.1	33	PZK 3011/4/7,50/7,62-KD LG	10884.0	33	PZK 3021/11/10,00/10,16-KD GN	11035.1	35
PZK 3011/12/7,50/7,62-KD LG	10892.0	33	PZK 3011/4/7,50/7,62-WD GN	31334.1	34	PZK 3021/11/10,00/10,16-KD LG	11035.0	35
PZK 3011/12/7,50/7,62-WD GN	31342.1	34	PZK 3011/5/7,50/7,62-FD GN	10933.1	34	PZK 3021/11/10,00/10,16-WD GN	31311.1	36
PZK 3011/13/7,50/7,62-FD GN	10941.1	34	PZK 3011/5/7,50/7,62-FD LG	10933.0	34	PZK 3021/12/10,00/10,16-KD GN	11036.1	35
PZK 3011/13/7,50/7,62-FD LG	10941.0	34	PZK 3011/5/7,50/7,62-KD GN	10885.1	33	PZK 3021/12/10,00/10,16-KD LG	11036.0	35
PZK 3011/13/7,50/7,62-KD GN	10893.1	33	PZK 3011/5/7,50/7,62-KD LG	10885.0	33	PZK 3021/12/10,00/10,16-WD GN	31312.1	36
PZK 3011/13/7,50/7,62-KD LG	10893.0	33	PZK 3011/5/7,50/7,62-WD GN	31335.1	34	PZK 3021/13/10,00/10,16-KD GN	11037.1	35
PZK 3011/13/7,50/7,62-WD GN	31343.1	34	PZK 3011/6/7,50/7,62-FD GN	10934.1	34	PZK 3021/13/10,00/10,16-KD LG	11037.0	35
PZK 3011/14/7,50/7,62-FD GN	10942.1	34	PZK 3011/6/7,50/7,62-FD LG	10934.0	34	PZK 3021/13/10,00/10,16-WD GN	31313.1	36
PZK 3011/14/7,50/7,62-FD LG	10942.0	34	PZK 3011/6/7,50/7,62-KD GN	10886.1	33	PZK 3021/14/10,00/10,16-KD GN	11038.1	35
PZK 3011/14/7,50/7,62-KD GN	10894.1	33	PZK 3011/6/7,50/7,62-KD LG	10886.0	33	PZK 3021/14/10,00/10,16-KD LG	11038.0	35
PZK 3011/14/7,50/7,62-KD LG	10894.0	33	PZK 3011/6/7,50/7,62-WD GN	31336.1	34	PZK 3021/14/10,00/10,16-WD GN	31314.1	36
PZK 3011/14/7,50/7,62-WD GN	31344.1	34	PZK 3011/7/7,50/7,62-FD GN	10935.1	34	PZK 3021/15/10,00/10,16-KD GN	11039.1	35
PZK 3011/15/7,50/7,62-FD GN	10943.1	34	PZK 3011/7/7,50/7,62-FD LG	10935.0	34	PZK 3021/15/10,00/10,16-KD LG	11039.0	35
PZK 3011/15/7,50/7,62-FD LG	10943.0	34	PZK 3011/7/7,50/7,62-KD GN	10887.1	33	PZK 3021/15/10,00/10,16-WD GN	31315.1	36

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PZK 3021/16/10,00/10,16-KD GN	11040.1	35	PZK 3100/21/5,00/5,08 LG	11093.0	26	PZK 3191/12/2,50-KD LG	12067.0	24
PZK 3021/16/10,00/10,16-KD LG	11040.0	35	PZK 3100/22/5,00/5,08 GN	11094.1	26	PZK 3191/12/2,54 OG	12116.3	25
PZK 3021/16/10,00/10,16-WD GN	31316.1	36	PZK 3100/22/5,00/5,08 LG	11094.0	26	PZK 3191/12/2,54-KD OG	12163.3	25
PZK 3021/17/10,00/10,16-KD GN	11041.1	35	PZK 3100/23/5,00/5,08 GN	11095.1	26	PZK 3191/13/2,50 LG	12021.0	24
PZK 3021/17/10,00/10,16-KD LG	11041.0	35	PZK 3100/23/5,00/5,08 LG	11095.0	26	PZK 3191/13/2,50-KD LG	12068.0	24
PZK 3021/17/10,00/10,16-WD GN	31317.1	36	PZK 3100/24/5,00/5,08 GN	11096.1	26	PZK 3191/13/2,54 OG	12117.3	25
PZK 3021/18/10,00/10,16-KD GN	11042.1	35	PZK 3100/24/5,00/5,08 LG	11096.0	26	PZK 3191/13/2,54-KD OG	12164.3	25
PZK 3021/18/10,00/10,16-KD LG	11042.0	35	PZK 3100/3/5,00/5,08 GN	11075.1	26	PZK 3191/14/2,50 LG	12022.0	24
PZK 3021/18/10,00/10,16-WD GN	31318.1	36	PZK 3100/3/5,00/5,08 LG	11075.0	26	PZK 3191/14/2,50-KD LG	12069.0	24
PZK 3021/19/10,00/10,16-KD GN	11043.1	35	PZK 3100/4/5,00/5,08 GN	11076.1	26	PZK 3191/14/2,54 OG	12118.3	25
PZK 3021/19/10,00/10,16-KD LG	11043.0	35	PZK 3100/4/5,00/5,08 LG	11076.0	26	PZK 3191/14/2,54-KD OG	12165.3	25
PZK 3021/19/10,00/10,16-WD GN	31319.1	36	PZK 3100/5/5,00/5,08 GN	11077.1	26	PZK 3191/15/2,50 LG	12023.0	24
PZK 3021/2/10,00/10,16-KD GN	11026.1	35	PZK 3100/5/5,00/5,08 LG	11077.0	26	PZK 3191/15/2,50-KD LG	12070.0	24
PZK 3021/2/10,00/10,16-KD LG	11026.0	35	PZK 3100/6/5,00/5,08 GN	11078.1	26	PZK 3191/15/2,54 OG	12119.3	25
PZK 3021/2/10,00/10,16-WD GN	31302.1	36	PZK 3100/6/5,00/5,08 LG	11078.0	26	PZK 3191/15/2,54-KD OG	12166.3	25
PZK 3021/20/10,00/10,16-KD GN	11044.1	35	PZK 3100/7/5,00/5,08 GN	11079.1	26	PZK 3191/16/2,50 LG	12024.0	24
PZK 3021/20/10,00/10,16-KD LG	11044.0	35	PZK 3100/7/5,00/5,08 LG	11079.0	26	PZK 3191/16/2,50-KD LG	12071.0	24
PZK 3021/20/10,00/10,16-WD GN	31320.1	36	PZK 3100/8/5,00/5,08 GN	11080.1	26	PZK 3191/16/2,54 OG	12120.3	25
PZK 3021/21/10,00/10,16-KD GN	11045.1	35	PZK 3100/8/5,00/5,08 LG	11080.0	26	PZK 3191/16/2,54-KD OG	12167.3	25
PZK 3021/21/10,00/10,16-KD LG	11045.0	35	PZK 3100/9/5,00/5,08 GN	11081.1	26	PZK 3191/17/2,50 LG	12025.0	24
PZK 3021/21/10,00/10,16-WD GN	31321.1	36	PZK 3100/9/5,00/5,08 LG	11081.0	26	PZK 3191/17/2,50-KD LG	12072.0	24
PZK 3021/22/10,00/10,16-KD GN	11046.1	35	PZK 3101/10/5,00/5,08-WD GN	11130.1	26	PZK 3191/17/2,54 OG	12121.3	25
PZK 3021/22/10,00/10,16-KD LG	11046.0	35	PZK 3101/10/5,00/5,08-WD LG	11130.0	26	PZK 3191/17/2,54-KD OG	12168.3	25
PZK 3021/22/10,00/10,16-WD GN	31322.1	36	PZK 3101/11/5,00/5,08-WD GN	11131.1	26	PZK 3191/18/2,50 LG	12026.0	24
PZK 3021/23/10,00/10,16-KD GN	11047.1	35	PZK 3101/11/5,00/5,08-WD LG	11131.0	26	PZK 3191/18/2,50-KD LG	12073.0	24
PZK 3021/23/10,00/10,16-KD LG	11047.0	35	PZK 3101/12/5,00/5,08-WD GN	11132.1	26	PZK 3191/18/2,54 OG	12122.3	25
PZK 3021/23/10,00/10,16-WD GN	31323.1	36	PZK 3101/12/5,00/5,08-WD LG	11132.0	26	PZK 3191/18/2,54-KD OG	12169.3	25
PZK 3021/24/10,00/10,16-KD GN	11048.1	35	PZK 3101/13/5,00/5,08-WD GN	11133.1	26	PZK 3191/19/2,50 LG	12027.0	24
PZK 3021/24/10,00/10,16-KD LG	11048.0	35	PZK 3101/13/5,00/5,08-WD LG	11133.0	26	PZK 3191/19/2,50-KD LG	12074.0	24
PZK 3021/24/10,00/10,16-WD GN	31324.1	36	PZK 3101/14/5,00/5,08-WD GN	11134.1	26	PZK 3191/19/2,54 OG	12123.3	25
PZK 3021/3/10,00/10,16-KD GN	11027.1	35	PZK 3101/14/5,00/5,08-WD LG	11134.0	26	PZK 3191/19/2,54-KD OG	12170.3	25
PZK 3021/3/10,00/10,16-KD LG	11027.0	35	PZK 3101/15/5,00/5,08-WD GN	11135.1	26	PZK 3191/2/2,50 LG	12010.0	24
PZK 3021/3/10,00/10,16-WD GN	31303.1	36	PZK 3101/15/5,00/5,08-WD LG	11135.0	26	PZK 3191/2/2,50-KD LG	12057.0	24
PZK 3021/4/10,00/10,16-KD GN	11028.1	35	PZK 3101/16/5,00/5,08-WD GN	11136.1	26	PZK 3191/2/2,54 OG	12106.3	25
PZK 3021/4/10,00/10,16-KD LG	11028.0	35	PZK 3101/16/5,00/5,08-WD LG	11136.0	26	PZK 3191/2/2,54-KD OG	12153.3	25
PZK 3021/4/10,00/10,16-WD GN	31304.1	36	PZK 3101/17/5,00/5,08-WD GN	11137.1	26	PZK 3191/20/2,50 LG	12028.0	24
PZK 3021/5/10,00/10,16-KD GN	11029.1	35	PZK 3101/17/5,00/5,08-WD LG	11137.0	26	PZK 3191/20/2,50-KD LG	12075.0	24
PZK 3021/5/10,00/10,16-KD LG	11029.0	35	PZK 3101/18/5,00/5,08-WD GN	11138.1	26	PZK 3191/20/2,54 OG	12124.3	25
PZK 3021/5/10,00/10,16-WD GN	31305.1	36	PZK 3101/18/5,00/5,08-WD LG	11138.0	26	PZK 3191/20/2,54-KD OG	12171.3	25
PZK 3021/6/10,00/10,16-KD GN	11030.1	35	PZK 3101/19/5,00/5,08-WD GN	11139.1	26	PZK 3191/21/2,50 LG	12029.0	24
PZK 3021/6/10,00/10,16-KD LG	11030.0	35	PZK 3101/19/5,00/5,08-WD LG	11139.0	26	PZK 3191/21/2,50-KD LG	12076.0	24
PZK 3021/6/10,00/10,16-WD GN	31306.1	36	PZK 3101/2/5,00/5,08-WD GN	11122.1	26	PZK 3191/21/2,54 OG	12125.3	25
PZK 3021/7/10,00/10,16-KD GN	11031.1	35	PZK 3101/2/5,00/5,08-WD LG	11122.0	26	PZK 3191/21/2,54-KD OG	12172.3	25
PZK 3021/7/10,00/10,16-KD LG	11031.0	35	PZK 3101/20/5,00/5,08-WD GN	11140.1	26	PZK 3191/22/2,50 LG	12030.0	24
PZK 3021/7/10,00/10,16-WD GN	31307.1	36	PZK 3101/20/5,00/5,08-WD LG	11140.0	26	PZK 3191/22/2,50-KD LG	12077.0	24
PZK 3021/8/10,00/10,16-KD GN	11032.1	35	PZK 3101/21/5,00/5,08-WD GN	11141.1	26	PZK 3191/22/2,54 OG	12126.3	25
PZK 3021/8/10,00/10,16-KD LG	11032.0	35	PZK 3101/21/5,00/5,08-WD LG	11141.0	26	PZK 3191/22/2,54-KD OG	12173.3	25
PZK 3021/8/10,00/10,16-WD GN	31308.1	36	PZK 3101/22/5,00/5,08-WD GN	11142.1	26	PZK 3191/23/2,50 LG	12031.0	24
PZK 3021/9/10,00/10,16-KD GN	11033.1	35	PZK 3101/22/5,00/5,08-WD LG	11142.0	26	PZK 3191/23/2,50-KD LG	12078.0	24
PZK 3021/9/10,00/10,16-KD LG	11033.0	35	PZK 3101/23/5,00/5,08-WD GN	11143.1	26	PZK 3191/23/2,54 OG	12127.3	25
PZK 3021/9/10,00/10,16-WD GN	31309.1	36	PZK 3101/23/5,00/5,08-WD LG	11143.0	26	PZK 3191/23/2,54-KD OG	12174.3	25
PZK 3100/10/5,00/5,08 GN	11082.1	26	PZK 3101/24/5,00/5,08-WD GN	11144.1	26	PZK 3191/24/2,50 LG	12032.0	24
PZK 3100/10/5,00/5,08 LG	11082.0	26	PZK 3101/24/5,00/5,08-WD LG	11144.0	26	PZK 3191/24/2,50-KD LG	12079.0	24
PZK 3100/11/5,00/5,08 GN	11083.1	26	PZK 3101/3/5,00/5,08-WD GN	11123.1	26	PZK 3191/24/2,54 OG	12128.3	25
PZK 3100/11/5,00/5,08 LG	11083.0	26	PZK 3101/3/5,00/5,08-WD LG	11123.0	26	PZK 3191/24/2,54-KD OG	12175.3	25
PZK 3100/12/5,00/5,08 GN	11084.1	26	PZK 3101/4/5,00/5,08-WD GN	11124.1	26	PZK 3191/3/2,50 LG	12011.0	24
PZK 3100/12/5,00/5,08 LG	11084.0	26	PZK 3101/4/5,00/5,08-WD LG	11124.0	26	PZK 3191/3/2,50-KD LG	12058.0	24
PZK 3100/13/5,00/5,08 GN	11085.1	26	PZK 3101/5/5,00/5,08-WD GN	11125.1	26	PZK 3191/3/2,54 OG	12107.3	25
PZK 3100/13/5,00/5,08 LG	11085.0	26	PZK 3101/5/5,00/5,08-WD LG	11125.0	26	PZK 3191/3/2,54-KD OG	12154.3	25
PZK 3100/14/5,00/5,08 GN	11086.1	26	PZK 3101/6/5,00/5,08-WD GN	11126.1	26	PZK 3191/4/2,50 LG	12012.0	24
PZK 3100/14/5,00/5,08 LG	11086.0	26	PZK 3101/6/5,00/5,08-WD LG	11126.0	26	PZK 3191/4/2,50-KD LG	12059.0	24
PZK 3100/15/5,00/5,08 GN	11087.1	26	PZK 3101/7/5,00/5,08-WD GN	11127.1	26	PZK 3191/4/2,54 OG	12108.3	25
PZK 3100/15/5,00/5,08 LG	11087.0	26	PZK 3101/7/5,00/5,08-WD LG	11127.0	26	PZK 3191/4/2,54-KD OG	12155.3	25
PZK 3100/16/5,00/5,08 GN	11088.1	26	PZK 3101/8/5,00/5,08-WD GN	11128.1	26	PZK 3191/5/2,50 LG	12013.0	24
PZK 3100/16/5,00/5,08 LG	11088.0	26	PZK 3101/8/5,00/5,08-WD LG	11128.0	26	PZK 3191/5/2,50-KD LG	12060.0	24
PZK 3100/17/5,00/5,08 GN	11089.1	26	PZK 3101/9/5,00/5,08-WD GN	11129.1	26	PZK 3191/5/2,54 OG	12109.3	25
PZK 3100/17/5,00/5,08 LG	11089.0	26	PZK 3101/9/5,00/5,08-WD LG	11129.0	26	PZK 3191/5/2,54-KD OG	12156.3	25
PZK 3100/18/5,00/5,08 GN	11090.1	26	PZK 3191/10/2,50 LG	12018.0	24	PZK 3191/6/2,50 LG	12014.0	24
PZK 3100/18/5,00/5,08 LG	11090.0	26	PZK 3191/10/2,50-KD LG	12065.0	24	PZK 3191/6/2,50-KD LG	12061.0	24
PZK 3100/19/5,00/5,08 GN	11091.1	26	PZK 3191/10/2,54 OG	12114.3	25	PZK 3191/6/2,54 OG	12110.3	25
PZK 3100/19/5,00/5,08 LG	11091.0	26	PZK 3191/10/2,54-KD OG	12161.3	25	PZK 3191/6/2,54-KD OG	12157.3	25
PZK 3100/2/5,00/5,08 GN	11074.1	26	PZK 3191/11/2,50 LG	12019.0	24	PZK 3191/7/2,50 LG	12015.0	24
PZK 3100/2/5,00/5,08 LG	11074.0	26	PZK 3191/11/2,50-KD LG	12066.0	24	PZK 3191/7/2,50-KD LG	12062.0	24
PZK 3100/20/5,00/5,08 GN	11092.1	26	PZK 3191/11/2,54 OG	12115.3	25	PZK 3191/7/2,54 OG	12111.3	25
PZK 3100/20/5,00/5,08 LG	11092.0	26	PZK 3191/11/2,54-KD OG	12162.3	25	PZK 3191/7/2,54-KD OG	12158.3	25
PZK 3100/21/5,00/5,08 GN	11093.1	26	PZK 3191/12/2,50 LG	12020.0	24	PZK 3191/8/2,50 LG	12016.0	24

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
PZK 3191/8/2,50-KD LG	12063.0	24	PZK 3750/3/5,00-PD10,00 GN	14513.1	30	SDK 16-TWI RD	17455.9	181
PZK 3191/8/2,54 OG	12112.3	25	PZK 3750/3/5,00-VP GN	13383.1	29	SDK 16-VPI GR	17457.6	181
PZK 3191/8/2,54-KD OG	12159.3	25	PZK 3750/3/5,08 GN	13359.1	31	SDK 16/1A/1B GR	17396.6	181
PZK 3191/9/2,50 LG	12017.0	24	PZK 3750/3/5,08-VP GN	13407.1	31	SDK 16/1A/1B/Z GR	17397.6	181
PZK 3191/9/2,50-KD LG	12064.0	24	PZK 3750/4/5,00 GN	13336.1	29	SDK 16/2A GR	17394.6	180
PZK 3191/9/2,54 OG	12113.3	25	PZK 3750/4/5,00-PD10,00 GN	14514.1	30	SDK 16/2A/Z GR	17398.6	180
PZK 3191/9/2,54-KD OG	12160.3	25	PZK 3750/4/5,00-VP GN	13384.1	29	SDK 4-AP/6 GR	17433.6	176
PZK 3750/10/5,00 GN	13342.1	29	PZK 3750/4/5,08 GN	13360.1	31	SDK 4-DP GR	17431.6	176
PZK 3750/10/5,00-PD10,00 GN	14520.1	30	PZK 3750/4/5,08-VP GN	13408.1	31	SDK 4-DPA GR	17434.6	177
PZK 3750/10/5,00-VP GN	13390.1	29	PZK 3750/5/5,00 GN	13337.1	29	SDK 4-FP GR	17432.6	176, 177
PZK 3750/10/5,08 GN	13366.1	31	PZK 3750/5/5,00-PD10,00 GN	14515.1	30	SDK 4-SPI/10 DG	17436.4	177
PZK 3750/10/5,08-VP GN	13414.1	31	PZK 3750/5/5,00-VP GN	13385.1	29	SDK 4-TWI RD	17435.9	177
PZK 3750/11/5,00 GN	13343.1	29	PZK 3750/5/5,08 GN	13361.1	31	SDK 4-VPI GR	17437.6	177
PZK 3750/11/5,00-PD10,00 GN	14521.1	30	PZK 3750/5/5,08-VP GN	13409.1	31	SDK 4/1A/1L GR	17382.6	177
PZK 3750/11/5,00-VP GN	13391.1	29	PZK 3750/6/5,00 GN	13338.1	29	SDK 4/1A/1L/Z GR	17383.6	177
PZK 3750/11/5,08 GN	13367.1	31	PZK 3750/6/5,00-PD10,00 GN	14516.1	30	SDK 4/2A GR	17380.6	176
PZK 3750/11/5,08-VP GN	13415.1	31	PZK 3750/6/5,00-VP GN	13386.1	29	SDK 4/2A/Z GR	17381.6	176
PZK 3750/12/5,00 GN	13344.1	29	PZK 3750/6/5,08 GN	13362.1	31	SPC/PBK 2,5/2,5mm GN	14419.1	19
PZK 3750/12/5,00-PD10,00 GN	14522.1	30	PZK 3750/6/5,08-VP GN	13410.1	31	SPC/PBK 5/2,5mm GN	14509.1	21
PZK 3750/12/5,00-VP GN	13392.1	29	PZK 3750/7/5,00 GN	13339.1	29	STL 130/10/10,00-V BK	11466.4	132
PZK 3750/12/5,08 GN	13368.1	31	PZK 3750/7/5,00-PD10,00 GN	14517.1	30	STL 130/10/10,16-V BK	13704.4	133
PZK 3750/12/5,08-VP GN	13416.1	31	PZK 3750/7/5,00-VP GN	13387.1	29	STL 130/10/5,00-V BK	11443.4	129
PZK 3750/13/5,00 GN	13345.1	29	PZK 3750/7/5,08 GN	13363.1	31	STL 130/10/5,08-V BK	13658.4	131
PZK 3750/13/5,00-VP GN	13393.1	29	PZK 3750/7/5,08-VP GN	13411.1	31	STL 130/11/10,00-V BK	11467.4	132
PZK 3750/13/5,08 GN	13369.1	31	PZK 3750/8/5,00 GN	13340.1	29	STL 130/11/10,16-V BK	13705.4	133
PZK 3750/13/5,08-VP GN	13417.1	31	PZK 3750/8/5,00-PD10,00 GN	14518.1	30	STL 130/11/5,00-V BK	11444.4	129
PZK 3750/14/5,00 GN	13346.1	29	PZK 3750/8/5,00-VP GN	13388.1	29	STL 130/11/5,08-V BK	13659.4	131
PZK 3750/14/5,00-VP GN	13394.1	29	PZK 3750/8/5,08 GN	13364.1	31	STL 130/12/10,00-V BK	11468.4	132
PZK 3750/14/5,08 GN	13370.1	31	PZK 3750/8/5,08-VP GN	13412.1	31	STL 130/12/10,16-V BK	13706.4	133
PZK 3750/14/5,08-VP GN	13418.1	31	PZK 3750/9/5,00 GN	13341.1	29	STL 130/12/5,00-V BK	11445.4	129
PZK 3750/15/5,00 GN	13347.1	29	PZK 3750/9/5,00-PD10,00 GN	14519.1	30	STL 130/12/5,08-V BK	13660.4	131
PZK 3750/15/5,00-VP GN	13395.1	29	PZK 3750/9/5,00-VP GN	13389.1	29	STL 130/13/5,00-V BK	11446.4	129
PZK 3750/15/5,08 GN	13371.1	31	PZK 3750/9/5,08 GN	13365.1	31	STL 130/13/5,08-V BK	13661.4	131
PZK 3750/15/5,08-VP GN	13419.1	31	PZK 3750/9/5,08-VP GN	13413.1	31	STL 130/14/5,00-V BK	11447.4	129
PZK 3750/16/5,00 GN	13348.1	29	PZK 3750/10/5,08-PD10,16 GN	14540.1	32	STL 130/14/5,08-V BK	13662.4	131
PZK 3750/16/5,00-VP GN	13396.1	29	PZK 3750/11/5,08-PD10,16 GN	14541.1	32	STL 130/15/5,00-V BK	11448.4	129
PZK 3750/16/5,08 GN	13372.1	31	PZK 3750/12/5,08-PD10,16 GN	14542.1	32	STL 130/15/5,08-V BK	13663.4	131
PZK 3750/16/5,08-VP GN	13420.1	31	PZK 3750/2/5,08-PD10,16 GN	14532.1	32	STL 130/16/5,00-V BK	11449.4	129
PZK 3750/17/5,00 GN	13349.1	29	PZK 3750/3/5,08-PD10,16 GN	14533.1	32	STL 130/16/5,08-V BK	13664.4	131
PZK 3750/17/5,00-VP GN	13397.1	29	PZK 3750/4/5,08-PD10,16 GN	14534.1	32	STL 130/17/5,00-V BK	11450.4	129
PZK 3750/17/5,08 GN	13373.1	31	PZK 3750/5/5,08-PD10,16 GN	14535.1	32	STL 130/17/5,08-V BK	13665.4	131
PZK 3750/17/5,08-VP GN	13421.1	31	PZK 3750/6/5,08-PD10,16 GN	14536.1	32	STL 130/18/5,00-V BK	11451.4	129
PZK 3750/18/5,00 GN	13350.1	29	PZK 3750/7/5,08-PD10,16 GN	14537.1	32	STL 130/18/5,08-V BK	13666.4	131
PZK 3750/18/5,00-VP GN	13398.1	29	PZK 3750/8/5,08-PD10,16 GN	14538.1	32	STL 130/19/5,00-V BK	11452.4	129
PZK 3750/18/5,08 GN	13374.1	31	PZK 3750/9/5,08-PD10,16 GN	14539.1	32	STL 130/19/5,08-V BK	13667.4	131
PZK 3750/18/5,08-VP GN	13422.1	31				STL 130/2/10,00-V BK	11458.4	132
PZK 3750/19/5,00 GN	13351.1	29	R			STL 130/2/10,16-V BK	13696.4	133
PZK 3750/19/5,00-VP GN	13399.1	29	RF SP 1 OG	5683.3	191	STL 130/2/5,00-V BK	11435.4	129
PZK 3750/19/5,08 GN	13375.1	31	RF SP 2 OG	5693.3	191	STL 130/2/5,08-V BK	13650.4	131
PZK 3750/19/5,08-VP GN	13423.1	31	RS-SP 0 2000 mm OG	5675.3	191	STL 130/20/5,00-V BK	11453.4	129
PZK 3750/2/5,00 GN	13334.1	29	RS-SP 1 2000 mm OG	5680.3	191	STL 130/20/5,08-V BK	13668.4	131
PZK 3750/2/5,00-PD10,00 GN	14512.1	30	RS-SP 2 2000 mm OG	5690.3	191	STL 130/21/5,00-V BK	11454.4	129
PZK 3750/2/5,00-VP GN	13382.1	29	S			STL 130/21/5,08-V BK	13669.4	131
PZK 3750/2/5,08 GN	13358.1	31	SDB 0,6x3,5	1086.0	176, 177	STL 130/22/5,00-V BK	11455.4	129
PZK 3750/2/5,08-VP GN	13406.1	31	SDB 0,8x4,0	1087.0	178-180, 181	STL 130/22/5,08-V BK	13670.4	131
PZK 3750/20/5,00 GN	13352.1	29	SDK 10-AP/6 GR	17443.6	178	STL 130/23/5,00-V BK	11456.4	129
PZK 3750/20/5,00-VP GN	13400.1	29	SDK 10-DP GR	17441.6	178	STL 130/23/5,08-V BK	13671.4	131
PZK 3750/20/5,08 GN	13376.1	31	SDK 10-DPA GR	17444.6	179	STL 130/24/5,00-V BK	11457.4	129
PZK 3750/20/5,08-VP GN	13424.1	31	SDK 10-FP GR	17442.6	178, 179	STL 130/24/5,08-V BK	13672.4	131
PZK 3750/21/5,00 GN	13353.1	29	SDK 10-SPI/10 DG	17446.4	179	STL 130/3/10,00-V BK	11459.4	132
PZK 3750/21/5,00-VP GN	13401.1	29	SDK 10-TWI RD	17445.9	179	STL 130/3/10,16-V BK	13697.4	133
PZK 3750/21/5,08 GN	13377.1	31	SDK 10-VPI GR	17447.6	179	STL 130/3/5,00-V BK	11436.4	129
PZK 3750/21/5,08-VP GN	13425.1	31	SDK 10/1A/1L GR	17388.6	179	STL 130/3/5,08-V BK	13651.4	131
PZK 3750/22/5,00 GN	13354.1	29	SDK 10/1A/1L/Z GR	17389.6	179	STL 130/4/10,00-V BK	11460.4	132
PZK 3750/22/5,00-VP GN	13402.1	29	SDK 10/2A GR	17386.6	178	STL 130/4/10,16-V BK	13698.4	133
PZK 3750/22/5,08 GN	13378.1	31	SDK 10/2A/Z GR	17387.6	178	STL 130/4/5,00-V BK	11437.4	129
PZK 3750/22/5,08-VP GN	13426.1	31	SDK 16-AP/6 GR	17453.6	180, 181	STL 130/4/5,08-V BK	13652.4	131
PZK 3750/23/5,00 GN	13355.1	29	SDK 16-DP GR	17451.6	180	STL 130/5/10,00-V BK	11461.4	132
PZK 3750/23/5,00-VP GN	13403.1	29	SDK 16-DPA GR	17454.6	181	STL 130/5/10,16-V BK	13699.4	133
PZK 3750/23/5,08 GN	13379.1	31	SDK 16-FP GR	17452.6	180, 181	STL 130/5/5,00-V BK	11438.4	129
PZK 3750/23/5,08-VP GN	13427.1	31	SDK 16-SPI/10 DG	17456.4	181	STL 130/5/5,08-V BK	13653.4	131
PZK 3750/24/5,00 GN	13356.1	29				STL 130/6/10,00-V BK	11462.4	132
PZK 3750/24/5,00-VP GN	13404.1	29				STL 130/6/10,16-V BK	13700.4	133
PZK 3750/24/5,08 GN	13380.1	31				STL 130/6/5,00-V BK	11439.4	129
PZK 3750/24/5,08-VP GN	13428.1	31				STL 130/6/5,08-V BK	13654.4	131
PZK 3750/3/5,00 GN	13335.1	29						

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
STL 130/7/10,00-V BK	11463.4	132	STL 1350/7/3,50-V BK	13916.4	128	STL 1541/16/3,50-H-G GN	31696.1	136
STL 130/7/10,16-V BK	13701.4	133	STL 1350/8/3,50-H BK	13940.4	128	STL 1541/16/3,50-V-FR GN	31716.1	138
STL 130/7/5,00-V BK	11440.4	129	STL 1350/8/3,50-V BK	13917.4	128	STL 1541/16/3,50-V-G GN	31676.1	136
STL 130/7/5,08-V BK	13655.4	131	STL 1350/9/3,50-H BK	13941.4	128	STL 1541/17/3,50-H-FR GN	31737.1	138
STL 130/8/10,00-V BK	11464.4	132	STL 1350/9/3,50-V BK	13918.4	128	STL 1541/17/3,50-H-G GN	31697.1	136
STL 130/8/10,16-V BK	13702.4	133	STL 140/10/5,00-H BK	11500.4	130	STL 1541/17/3,50-V-FR GN	31717.1	138
STL 130/8/5,00-V BK	11441.4	129	STL 140/10/5,08-H BK	13681.4	131	STL 1541/17/3,50-V-G GN	31677.1	136
STL 130/8/5,08-V BK	13656.4	131	STL 140/11/5,00-H BK	11501.4	130	STL 1541/18/3,50-H-FR GN	31738.1	138
STL 130/9/10,00-V BK	11465.4	132	STL 140/11/5,08-H BK	13682.4	131	STL 1541/18/3,50-H-G GN	31698.1	136
STL 130/9/10,16-V BK	13703.4	133	STL 140/12/5,00-H BK	11502.4	130	STL 1541/18/3,50-V-FR GN	31718.1	138
STL 130/9/5,00-V BK	11442.4	129	STL 140/12/5,08-H BK	13683.4	131	STL 1541/18/3,50-V-G GN	31678.1	136
STL 130/9/5,08-V BK	13657.4	131	STL 140/13/5,00-H BK	11503.4	130	STL 1541/19/3,50-H-FR GN	31739.1	138
STL 132/10/5,00-V BK	11477.4	129	STL 140/13/5,08-H BK	13684.4	131	STL 1541/19/3,50-H-G GN	31699.1	136
STL 132/11/5,00-V BK	11478.4	129	STL 140/14/5,00-H BK	11504.4	130	STL 1541/19/3,50-V-FR GN	31719.1	138
STL 132/12/5,00-V BK	11479.4	129	STL 140/14/5,08-H BK	13685.4	131	STL 1541/19/3,50-V-G GN	31679.1	136
STL 132/13/5,00-V BK	11480.4	129	STL 140/15/5,00-H BK	11505.4	130	STL 1541/2/3,50-H-FR GN	31722.1	138
STL 132/14/5,00-V BK	11481.4	129	STL 140/15/5,08-H BK	13686.4	131	STL 1541/2/3,50-H-G GN	31682.1	136
STL 132/15/5,00-V BK	11482.4	129	STL 140/16/5,00-H BK	11506.4	130	STL 1541/2/3,50-V-FR GN	31702.1	138
STL 132/16/5,00-V BK	11483.4	129	STL 140/16/5,08-H BK	13687.4	131	STL 1541/2/3,50-V-G GN	31892.1	136
STL 132/17/5,00-V BK	11484.4	129	STL 140/17/5,00-H BK	11507.4	130	STL 1541/20/3,50-H-FR GN	31740.1	138
STL 132/18/5,00-V BK	11485.4	129	STL 140/17/5,08-H BK	13688.4	131	STL 1541/20/3,50-H-G GN	31700.1	136
STL 132/19/5,00-V BK	11486.4	129	STL 140/18/5,00-H BK	11508.4	130	STL 1541/20/3,50-V-FR GN	31720.1	138
STL 132/2/5,00-V BK	11469.4	129	STL 140/18/5,08-H BK	13689.4	131	STL 1541/20/3,50-V-G GN	31680.1	136
STL 132/20/5,00-V BK	11487.4	129	STL 140/19/5,00-H BK	11509.4	130	STL 1541/3/3,50-H-FR GN	31723.1	138
STL 132/21/5,00-V BK	11488.4	129	STL 140/19/5,08-H BK	13690.4	131	STL 1541/3/3,50-H-G GN	31683.1	136
STL 132/22/5,00-V BK	11489.4	129	STL 140/2/5,00-H BK	11492.4	130	STL 1541/3/3,50-V-FR GN	31703.1	138
STL 132/23/5,00-V BK	11490.4	129	STL 140/2/5,08-H BK	13673.4	131	STL 1541/3/3,50-V-G GN	31893.1	136
STL 132/24/5,00-V BK	11491.4	129	STL 140/20/5,00-H BK	11510.4	130	STL 1541/4/3,50-H-FR GN	31724.1	138
STL 132/3/5,00-V BK	11470.4	129	STL 140/20/5,08-H BK	13691.4	131	STL 1541/4/3,50-H-G GN	31684.1	136
STL 132/4/5,00-V BK	11471.4	129	STL 140/21/5,00-H BK	11511.4	130	STL 1541/4/3,50-V-FR GN	31704.1	138
STL 132/5/5,00-V BK	11472.4	129	STL 140/21/5,08-H BK	13692.4	131	STL 1541/4/3,50-V-G GN	31894.1	136
STL 132/6/5,00-V BK	11473.4	129	STL 140/22/5,00-H BK	11512.4	130	STL 1541/5/3,50-H-FR GN	31725.1	138
STL 132/7/5,00-V BK	11474.4	129	STL 140/22/5,08-H BK	13693.4	131	STL 1541/5/3,50-H-G GN	31685.1	136
STL 132/8/5,00-V BK	11475.4	129	STL 140/23/5,00-H BK	11513.4	130	STL 1541/5/3,50-V-FR GN	31705.1	138
STL 132/9/5,00-V BK	11476.4	129	STL 140/23/5,08-H BK	13694.4	131	STL 1541/5/3,50-V-G GN	31895.1	136
STL 1350/10/3,50-H BK	13942.4	128	STL 140/24/5,00-H BK	11514.4	130	STL 1541/6/3,50-H-FR GN	31726.1	138
STL 1350/10/3,50-V BK	13919.4	128	STL 140/24/5,08-H BK	13695.4	131	STL 1541/6/3,50-H-G GN	31686.1	136
STL 1350/11/3,50-H BK	13943.4	128	STL 140/3/5,00-H BK	11493.4	130	STL 1541/6/3,50-V-FR GN	31706.1	138
STL 1350/11/3,50-V BK	13920.4	128	STL 140/3/5,08-H BK	13674.4	131	STL 1541/6/3,50-V-G GN	31896.1	136
STL 1350/12/3,50-H BK	13944.4	128	STL 140/4/5,00-H BK	11494.4	130	STL 1541/7/3,50-H-FR GN	31727.1	138
STL 1350/12/3,50-V BK	13921.4	128	STL 140/4/5,08-H BK	13675.4	131	STL 1541/7/3,50-H-G GN	31687.1	136
STL 1350/13/3,50-H BK	13945.4	128	STL 140/5/5,00-H BK	11495.4	130	STL 1541/7/3,50-V-FR GN	31707.1	138
STL 1350/13/3,50-V BK	13922.4	128	STL 140/5/5,08-H BK	13676.4	131	STL 1541/7/3,50-V-G GN	31897.1	136
STL 1350/14/3,50-H BK	13946.4	128	STL 140/6/5,00-H BK	11496.4	130	STL 1541/8/3,50-H-FR GN	31728.1	138
STL 1350/14/3,50-V BK	13923.4	128	STL 140/6/5,08-H BK	13677.4	131	STL 1541/8/3,50-H-G GN	31688.1	136
STL 1350/15/3,50-H BK	13947.4	128	STL 140/7/5,00-H BK	11497.4	130	STL 1541/8/3,50-V-FR GN	31708.1	138
STL 1350/15/3,50-V BK	13924.4	128	STL 140/7/5,08-H BK	13678.4	131	STL 1541/8/3,50-V-G GN	31898.1	136
STL 1350/16/3,50-H BK	13948.4	128	STL 140/8/5,00-H BK	11498.4	130	STL 1541/9/3,50-H-FR GN	31729.1	138
STL 1350/16/3,50-V BK	13925.4	128	STL 140/8/5,08-H BK	13679.4	131	STL 1541/9/3,50-H-G GN	31689.1	136
STL 1350/17/3,50-H BK	13949.4	128	STL 140/9/5,00-H BK	11499.4	130	STL 1541/9/3,50-V-FR GN	31709.1	138
STL 1350/17/3,50-V BK	13926.4	128	STL 140/9/5,08-H BK	13680.4	131	STL 1541/9/3,50-V-G GN	31899.1	136
STL 1350/18/3,50-H BK	13950.4	128	STL 1541/10/3,50-H-FR GN	31730.1	138	STL 1550/10/3,50-H-F GN	13778.1	135
STL 1350/18/3,50-V BK	13927.4	128	STL 1541/10/3,50-H-G GN	31690.1	136	STL 1550/10/3,50-H-FR GN	31770.1	137
STL 1350/19/3,50-H BK	13951.4	128	STL 1541/10/3,50-V-FR GN	31710.1	138	STL 1550/10/3,50-H-G GN	11919.1	134
STL 1350/19/3,50-V BK	13928.4	128	STL 1541/10/3,50-V-G GN	31900.1	136	STL 1550/10/3,50-V-FR GN	13761.1	135
STL 1350/2/3,50-H BK	13934.4	128	STL 1541/11/3,50-H-FR GN	31731.1	138	STL 1550/10/3,50-V-G GN	31750.1	137
STL 1350/2/3,50-V BK	13911.4	128	STL 1541/11/3,50-H-G GN	31691.1	136	STL 1550/10/3,50-V-G GN	11885.1	134
STL 1350/20/3,50-H BK	13952.4	128	STL 1541/11/3,50-V-FR GN	31711.1	138	STL 1550/10/3,81-H-F GN	13814.1	140
STL 1350/20/3,50-V BK	13929.4	128	STL 1541/11/3,50-V-G GN	31671.1	136	STL 1550/10/3,81-H-G GN	11938.1	139
STL 1350/21/3,50-H BK	13953.4	128	STL 1541/12/3,50-H-FR GN	31732.1	138	STL 1550/10/3,81-V-F GN	13795.1	140
STL 1350/21/3,50-V BK	13930.4	128	STL 1541/12/3,50-H-G GN	31692.1	136	STL 1550/10/3,81-V-G GN	11904.1	139
STL 1350/22/3,50-H BK	13954.4	128	STL 1541/12/3,50-V-FR GN	31712.1	138	STL 1550/11/3,50-H-F GN	13779.1	135
STL 1350/22/3,50-V BK	13931.4	128	STL 1541/12/3,50-V-G GN	31672.1	136	STL 1550/11/3,50-H-FR GN	31771.1	137
STL 1350/23/3,50-H BK	13955.4	128	STL 1541/13/3,50-H-FR GN	31733.1	138	STL 1550/11/3,50-H-G GN	11920.1	134
STL 1350/23/3,50-V BK	13932.4	128	STL 1541/13/3,50-H-G GN	31693.1	136	STL 1550/11/3,50-V-F GN	13762.1	135
STL 1350/24/3,50-H BK	13956.4	128	STL 1541/13/3,50-V-FR GN	31713.1	138	STL 1550/11/3,50-V-FR GN	31751.1	137
STL 1350/24/3,50-V BK	13933.4	128	STL 1541/13/3,50-V-G GN	31673.1	136	STL 1550/11/3,50-V-G GN	11886.1	134
STL 1350/3/3,50-H BK	13935.4	128	STL 1541/14/3,50-H-FR GN	31734.1	138	STL 1550/11/3,81-H-F GN	13815.1	140
STL 1350/3/3,50-V BK	13912.4	128	STL 1541/14/3,50-H-G GN	31694.1	136	STL 1550/11/3,81-H-G GN	11939.1	139
STL 1350/4/3,50-H BK	13936.4	128	STL 1541/14/3,50-V-FR GN	31714.1	138	STL 1550/11/3,81-V-F GN	13796.1	140
STL 1350/4/3,50-V BK	13913.4	128	STL 1541/14/3,50-V-G GN	31674.1	136	STL 1550/11/3,81-V-G GN	11905.1	139
STL 1350/5/3,50-H BK	13937.4	128	STL 1541/15/3,50-H-FR GN	31735.1	138	STL 1550/12/3,50-H-F GN	13780.1	135
STL 1350/5/3,50-V BK	13914.4	128	STL 1541/15/3,50-H-G GN	31695.1	136	STL 1550/12/3,50-H-FR GN	31772.1	137
STL 1350/6/3,50-H BK	13938.4	128	STL 1541/15/3,50-V-FR GN	31715.1	138	STL 1550/12/3,50-H-G GN	11921.1	134
STL 1350/6/3,50-V BK	13915.4	128	STL 1541/15/3,50-V-G GN	31675.1	136	STL 1550/12/3,50-V-F GN	13763.1	135
STL 1350/7/3,50-H BK	13939.4	128	STL 1541/16/3,50-H-FR GN	31736.1	138	STL 1550/12/3,50-V-FR GN	31752.1	137

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
STL 1550/12/3,50-V-G GN	11887.1	134	STL 1550/2/3,50-H-FR GN	31762.1	137	STL 1550/8/3,81-H-G GN	11936.1	139
STL 1550/12/3,81-H-F GN	13816.1	140	STL 1550/2/3,50-H-G GN	11911.1	134	STL 1550/8/3,81-V-F GN	13793.1	140
STL 1550/12/3,81-H-G GN	11940.1	139	STL 1550/2/3,50-V-F GN	13753.1	135	STL 1550/8/3,81-V-G GN	11902.1	139
STL 1550/12/3,81-V-F GN	13797.1	140	STL 1550/2/3,50-V-FR GN	31742.1	137	STL 1550/9/3,50-H-F GN	13777.1	135
STL 1550/12/3,81-V-G GN	11906.1	139	STL 1550/2/3,50-V-G GN	11877.1	134	STL 1550/9/3,50-H-FR GN	31769.1	137
STL 1550/13/3,50-H-F GN	13781.1	135	STL 1550/2/3,81-H-F GN	13806.1	140	STL 1550/9/3,50-H-G GN	11918.1	134
STL 1550/13/3,50-H-FR GN	31773.1	137	STL 1550/2/3,81-H-G GN	11930.1	139	STL 1550/9/3,50-V-F GN	13760.1	135
STL 1550/13/3,50-H-G GN	11922.1	134	STL 1550/2/3,81-V-F GN	13787.1	140	STL 1550/9/3,50-V-FR GN	31749.1	137
STL 1550/13/3,50-V-F GN	13764.1	135	STL 1550/2/3,81-V-G GN	11896.1	139	STL 1550/9/3,50-V-G GN	11884.1	134
STL 1550/13/3,50-V-FR GN	31753.1	137	STL 1550/20/3,50-H-F GN	13988.1	135	STL 1550/9/3,81-H-F GN	13813.1	140
STL 1550/13/3,50-V-G GN	11888.1	134	STL 1550/20/3,50-H-FR GN	31780.1	137	STL 1550/9/3,81-H-G GN	11937.1	139
STL 1550/13/3,81-H-F GN	13817.1	140	STL 1550/20/3,50-H-G GN	11929.1	134	STL 1550/9/3,81-V-F GN	13794.1	140
STL 1550/13/3,81-H-G GN	11941.1	139	STL 1550/20/3,50-V-F GN	13986.1	135	STL 1550/9/3,81-V-G GN	11903.1	139
STL 1550/13/3,81-V-F GN	13798.1	140	STL 1550/20/3,50-V-FR GN	31760.1	137	STL 1570/10/3,81-H-G GN	11972.1	142
STL 1550/13/3,81-V-G GN	11907.1	139	STL 1550/20/3,50-V-G GN	11895.1	134	STL 1570/10/3,81-V-G GN	11953.1	142
STL 1550/14/3,50-H-F GN	13782.1	135	STL 1550/20/3,81-H-F GN	13824.1	140	STL 1570/11/3,81-H-G GN	11973.1	142
STL 1550/14/3,50-H-FR GN	31774.1	137	STL 1550/20/3,81-H-G GN	13716.1	139	STL 1570/11/3,81-V-G GN	11954.1	142
STL 1550/14/3,50-H-G GN	11923.1	134	STL 1550/20/3,81-V-F GN	13805.1	140	STL 1570/12/3,81-H-G GN	11974.1	142
STL 1550/14/3,50-V-F GN	13765.1	135	STL 1550/20/3,81-V-G GN	13712.1	139	STL 1570/12/3,81-V-G GN	11955.1	142
STL 1550/14/3,50-V-FR GN	31754.1	137	STL 1550/3/3,50-H-F GN	13771.1	135	STL 1570/13/3,81-H-G GN	11975.1	142
STL 1550/14/3,50-V-G GN	11889.1	134	STL 1550/3/3,50-H-FR GN	31763.1	137	STL 1570/13/3,81-V-G GN	11956.1	142
STL 1550/14/3,81-H-F GN	13818.1	140	STL 1550/3/3,50-H-G GN	11912.1	134	STL 1570/14/3,81-H-G GN	11976.1	142
STL 1550/14/3,81-H-G GN	11942.1	139	STL 1550/3/3,50-V-F GN	13754.1	135	STL 1570/14/3,81-V-G GN	11957.1	142
STL 1550/14/3,81-V-F GN	13799.1	140	STL 1550/3/3,50-V-FR GN	31743.1	137	STL 1570/15/3,81-H-G GN	11977.1	142
STL 1550/14/3,81-V-G GN	11908.1	139	STL 1550/3/3,50-V-G GN	11878.1	134	STL 1570/15/3,81-V-G GN	11958.1	142
STL 1550/15/3,50-H-F GN	13783.1	135	STL 1550/3/3,81-H-F GN	13807.1	140	STL 1570/16/3,81-H-G GN	11978.1	142
STL 1550/15/3,50-H-FR GN	31775.1	137	STL 1550/3/3,81-H-G GN	11931.1	139	STL 1570/16/3,81-V-G GN	11959.1	142
STL 1550/15/3,50-H-G GN	11924.1	134	STL 1550/3/3,81-V-F GN	13788.1	140	STL 1570/17/3,81-H-G GN	11979.1	142
STL 1550/15/3,50-V-F GN	13766.1	135	STL 1550/3/3,81-V-G GN	11897.1	139	STL 1570/17/3,81-V-G GN	11960.1	142
STL 1550/15/3,50-V-FR GN	31755.1	137	STL 1550/4/3,50-H-F GN	13772.1	135	STL 1570/18/3,81-H-G GN	11980.1	142
STL 1550/15/3,50-V-G GN	11890.1	134	STL 1550/4/3,50-H-FR GN	31764.1	137	STL 1570/18/3,81-V-G GN	11961.1	142
STL 1550/15/3,81-H-F GN	13819.1	140	STL 1550/4/3,50-H-G GN	11913.1	134	STL 1570/19/3,81-H-G GN	11981.1	142
STL 1550/15/3,81-H-G GN	11943.1	139	STL 1550/4/3,50-V-F GN	13755.1	135	STL 1570/19/3,81-V-G GN	11962.1	142
STL 1550/15/3,81-V-F GN	13800.1	140	STL 1550/4/3,50-V-FR GN	31744.1	137	STL 1570/2/3,81-H-G GN	11964.1	142
STL 1550/15/3,81-V-G GN	11909.1	139	STL 1550/4/3,50-V-G GN	11879.1	134	STL 1570/2/3,81-V-G GN	11945.1	142
STL 1550/16/3,50-H-F GN	13784.1	135	STL 1550/4/3,81-H-F GN	13808.1	140	STL 1570/20/3,81-H-G GN	11982.1	142
STL 1550/16/3,50-H-FR GN	31776.1	137	STL 1550/4/3,81-H-G GN	11932.1	139	STL 1570/20/3,81-V-G GN	11963.1	142
STL 1550/16/3,50-H-G GN	11925.1	134	STL 1550/4/3,81-V-F GN	13789.1	140	STL 1570/3/3,81-H-G GN	11965.1	142
STL 1550/16/3,50-V-F GN	13767.1	135	STL 1550/4/3,81-V-G GN	11898.1	139	STL 1570/3/3,81-V-G GN	11946.1	142
STL 1550/16/3,50-V-FR GN	31756.1	137	STL 1550/5/3,50-H-F GN	13773.1	135	STL 1570/4/3,81-H-G GN	11966.1	142
STL 1550/16/3,50-V-G GN	11891.1	134	STL 1550/5/3,50-H-FR GN	31765.1	137	STL 1570/4/3,81-V-G GN	11947.1	142
STL 1550/16/3,81-H-F GN	13820.1	140	STL 1550/5/3,50-H-G GN	11914.1	134	STL 1570/5/3,81-H-G GN	11967.1	142
STL 1550/16/3,81-H-G GN	11944.1	139	STL 1550/5/3,50-V-F GN	13756.1	135	STL 1570/5/3,81-V-G GN	11948.1	142
STL 1550/16/3,81-V-F GN	13801.1	140	STL 1550/5/3,50-V-FR GN	31745.1	137	STL 1570/6/3,81-H-G GN	11968.1	142
STL 1550/16/3,81-V-G GN	11910.1	139	STL 1550/5/3,50-V-G GN	11880.1	134	STL 1570/6/3,81-V-G GN	11949.1	142
STL 1550/17/3,50-H-F GN	13785.1	135	STL 1550/5/3,81-H-F GN	13809.1	140	STL 1570/7/3,81-H-G GN	11969.1	142
STL 1550/17/3,50-H-FR GN	31777.1	137	STL 1550/5/3,81-H-G GN	11933.1	139	STL 1570/7/3,81-V-G GN	11950.1	142
STL 1550/17/3,50-H-G GN	11926.1	134	STL 1550/5/3,81-V-F GN	13790.1	140	STL 1570/8/3,81-H-G GN	11970.1	142
STL 1550/17/3,50-V-F GN	13768.1	135	STL 1550/5/3,81-V-G GN	11899.1	139	STL 1570/8/3,81-V-G GN	11951.1	142
STL 1550/17/3,50-V-FR GN	31757.1	137	STL 1550/6/3,50-H-F GN	13774.1	135	STL 1570/9/3,81-H-G GN	11971.1	142
STL 1550/17/3,50-V-G GN	11892.1	134	STL 1550/6/3,50-H-FR GN	31766.1	137	STL 1570/9/3,81-V-G GN	11952.1	142
STL 1550/17/3,81-H-F GN	13821.1	140	STL 1550/6/3,50-H-G GN	11915.1	134	STL 1590/10/3,81-G GN	11991.1	141
STL 1550/17/3,81-H-G GN	13713.1	139	STL 1550/6/3,50-V-F GN	13757.1	135	STL 1590/11/3,81-G GN	11992.1	141
STL 1550/17/3,81-V-F GN	13802.1	140	STL 1550/6/3,50-V-FR GN	31746.1	137	STL 1590/12/3,81-G GN	11993.1	141
STL 1550/17/3,81-V-G GN	13709.1	139	STL 1550/6/3,50-V-G GN	11881.1	134	STL 1590/13/3,81-G GN	11994.1	141
STL 1550/18/3,50-H-F GN	13786.1	135	STL 1550/6/3,81-H-F GN	13810.1	140	STL 1590/14/3,81-G GN	11995.1	141
STL 1550/18/3,50-H-FR GN	31778.1	137	STL 1550/6/3,81-H-G GN	11934.1	139	STL 1590/15/3,81-G GN	11996.1	141
STL 1550/18/3,50-H-G GN	11927.1	134	STL 1550/6/3,81-V-F GN	13791.1	140	STL 1590/16/3,81-G GN	11997.1	141
STL 1550/18/3,50-V-F GN	13769.1	135	STL 1550/6/3,81-V-G GN	11900.1	139	STL 1590/17/3,81-G GN	11998.1	141
STL 1550/18/3,50-V-FR GN	31758.1	137	STL 1550/7/3,50-H-F GN	13775.1	135	STL 1590/18/3,81-G GN	11999.1	141
STL 1550/18/3,50-V-G GN	11893.1	134	STL 1550/7/3,50-H-FR GN	31767.1	137	STL 1590/19/3,81-G GN	12000.1	141
STL 1550/18/3,81-H-F GN	13822.1	140	STL 1550/7/3,50-H-G GN	11916.1	134	STL 1590/2/3,81-G GN	11983.1	141
STL 1550/18/3,81-H-G GN	13714.1	139	STL 1550/7/3,50-V-F GN	13758.1	135	STL 1590/20/3,81-G GN	12001.1	141
STL 1550/18/3,81-V-F GN	13803.1	140	STL 1550/7/3,50-V-FR GN	31747.1	137	STL 1590/3/3,81-G GN	11984.1	141
STL 1550/18/3,81-V-G GN	13710.1	139	STL 1550/7/3,50-V-G GN	11882.1	134	STL 1590/4/3,81-G GN	11985.1	141
STL 1550/19/3,50-H-F GN	13987.1	135	STL 1550/7/3,81-H-F GN	13811.1	140	STL 1590/5/3,81-G GN	11986.1	141
STL 1550/19/3,50-H-FR GN	31779.1	137	STL 1550/7/3,81-H-G GN	11935.1	139	STL 1590/6/3,81-G GN	11987.1	141
STL 1550/19/3,50-H-G GN	11928.1	134	STL 1550/7/3,81-V-F GN	13792.1	140	STL 1590/7/3,81-G GN	11988.1	141
STL 1550/19/3,50-V-F GN	13985.1	135	STL 1550/7/3,81-V-G GN	11901.1	139	STL 1590/8/3,81-G GN	11989.1	141
STL 1550/19/3,50-V-FR GN	31759.1	137	STL 1550/8/3,50-H-F GN	13776.1	135	STL 1590/9/3,81-G GN	11990.1	141
STL 1550/19/3,50-V-G GN	11894.1	134	STL 1550/8/3,50-H-FR GN	31768.1	137	STL 950/10/5,00-H GN	11569.1	143
STL 1550/19/3,81-H-F GN	13823.1	140	STL 1550/8/3,50-H-G GN	11917.1	134	STL 950/10/5,00-H-F GN	11789.1	147
STL 1550/19/3,81-H-G GN	13715.1	139	STL 1550/8/3,50-V-F GN	13759.1	135	STL 950/10/5,00-H-FR GN	30610.1	148
STL 1550/19/3,81-V-F GN	13804.1	140	STL 1550/8/3,50-V-FR GN	31748.1	137	STL 950/10/5,00-H-G GN	11661.1	145
STL 1550/19/3,81-V-G GN	13711.1	139	STL 1550/8/3,50-V-G GN	11883.1	134	STL 950/10/5,00-H-G-HC GN	30570.1	146
STL 1550/2/3,50-H-F GN	13770.1	135	STL 1550/8/3,81-H-F GN	13812.1	140	STL 950/10/5,00-H-HC GN	30530.1	144

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
STL 950/10/5,00-V GN	11523.1	143	STL 950/15/5,00-V-F GN	13244.1	147	STL 950/20/5,00-H-G GN	11671.1	145
STL 950/10/5,00-V-F GN	12209.1	147	STL 950/15/5,00-V-G GN	11620.1	145	STL 950/20/5,00-V GN	11533.1	143
STL 950/10/5,00-V-F-HC GN	30590.1	148	STL 950/15/5,08-H GN	11597.1	151	STL 950/20/5,00-V-F GN	13249.1	147
STL 950/10/5,00-V-G GN	11615.1	145	STL 950/15/5,08-H-F GN	13272.1	155	STL 950/20/5,00-V-G GN	11625.1	145
STL 950/10/5,00-V-G-HC GN	30550.1	146	STL 950/15/5,08-H-G GN	11689.1	153	STL 950/20/5,08-H GN	11602.1	151
STL 950/10/5,00-V-HC GN	30510.1	144	STL 950/15/5,08-V GN	11551.1	151	STL 950/20/5,08-H-F GN	13277.1	155
STL 950/10/5,08-H GN	11592.1	151	STL 950/15/5,08-V-F GN	13202.1	155	STL 950/20/5,08-H-G GN	11694.1	153
STL 950/10/5,08-H-F GN	11798.1	155	STL 950/15/5,08-V-G GN	11643.1	153	STL 950/20/5,08-V GN	11556.1	151
STL 950/10/5,08-H-G GN	11684.1	153	STL 950/16/5,00-H GN	11575.1	143	STL 950/20/5,08-V-F GN	13207.1	155
STL 950/10/5,08-V GN	11546.1	151	STL 950/16/5,00-H-F GN	13259.1	147	STL 950/20/5,08-V-G GN	11648.1	153
STL 950/10/5,08-V-F GN	12218.1	155	STL 950/16/5,00-H-G GN	11667.1	145	STL 950/21/5,00-H GN	11580.1	143
STL 950/10/5,08-V-G GN	11638.1	153	STL 950/16/5,00-V GN	11529.1	143	STL 950/21/5,00-H-F GN	13264.1	147
STL 950/11/5,00-H GN	11570.1	143	STL 950/16/5,00-V-F GN	13245.1	147	STL 950/21/5,00-H-G GN	11672.1	145
STL 950/11/5,00-H-F GN	13254.1	147	STL 950/16/5,00-V-G GN	11621.1	145	STL 950/21/5,00-V GN	11534.1	143
STL 950/11/5,00-H-F-HC GN	30611.1	148	STL 950/16/5,08-H GN	11598.1	151	STL 950/21/5,00-V-F GN	13250.1	147
STL 950/11/5,00-H-G GN	11662.1	145	STL 950/16/5,08-H-F GN	13273.1	155	STL 950/21/5,00-V-G GN	11626.1	145
STL 950/11/5,00-H-G-HC GN	30571.1	146	STL 950/16/5,08-H-G GN	11690.1	153	STL 950/21/5,08-H GN	11603.1	151
STL 950/11/5,00-H-HC GN	30531.1	144	STL 950/16/5,08-V GN	11552.1	151	STL 950/21/5,08-H-F GN	13278.1	155
STL 950/11/5,00-V GN	11524.1	143	STL 950/16/5,08-V-F GN	13203.1	155	STL 950/21/5,08-H-G GN	11695.1	153
STL 950/11/5,00-V-F GN	13240.1	147	STL 950/16/5,08-V-G GN	11644.1	153	STL 950/21/5,08-V GN	11557.1	151
STL 950/11/5,00-V-F-HC GN	30591.1	148	STL 950/17/5,00-H GN	11576.1	143	STL 950/21/5,08-V-F GN	13208.1	155
STL 950/11/5,00-V-G GN	11616.1	145	STL 950/17/5,00-H-F GN	13260.1	147	STL 950/21/5,08-V-G GN	11649.1	153
STL 950/11/5,00-V-G-HC GN	30551.1	146	STL 950/17/5,00-H-G GN	11668.1	145	STL 950/22/5,00-H GN	11581.1	143
STL 950/11/5,00-V-HC GN	30511.1	144	STL 950/17/5,00-V GN	11530.1	143	STL 950/22/5,00-H-F GN	13265.1	147
STL 950/11/5,08-H GN	11593.1	151	STL 950/17/5,00-V-F GN	13246.1	147	STL 950/22/5,00-H-G GN	11673.1	145
STL 950/11/5,08-H-F GN	13268.1	155	STL 950/17/5,00-V-G GN	11622.1	145	STL 950/22/5,00-V GN	11535.1	143
STL 950/11/5,08-H-G GN	11685.1	153	STL 950/17/5,08-H GN	11599.1	151	STL 950/22/5,00-V-F GN	13251.1	147
STL 950/11/5,08-H-G GN	11547.1	151	STL 950/17/5,08-H-F GN	13274.1	155	STL 950/22/5,00-V-G GN	11627.1	145
STL 950/11/5,08-V-F GN	13198.1	155	STL 950/17/5,08-H-G GN	11691.1	153	STL 950/22/5,08-H GN	11604.1	151
STL 950/11/5,08-V-G GN	11639.1	153	STL 950/17/5,08-V GN	11553.1	151	STL 950/22/5,08-H-F GN	13279.1	155
STL 950/12/5,00-H GN	11571.1	143	STL 950/17/5,08-V-F GN	13204.1	155	STL 950/22/5,08-H-G GN	11696.1	153
STL 950/12/5,00-H-F GN	13255.1	147	STL 950/17/5,08-V-G GN	11645.1	153	STL 950/22/5,08-V GN	11558.1	151
STL 950/12/5,00-H-F-HC GN	30612.1	148	STL 950/18/5,00-H GN	11577.1	143	STL 950/22/5,08-V-F GN	13209.1	155
STL 950/12/5,00-H-G GN	11663.1	145	STL 950/18/5,00-H-F GN	13261.1	147	STL 950/22/5,00-V-G GN	11650.1	153
STL 950/12/5,00-H-G-HC GN	30572.1	146	STL 950/18/5,00-H-G GN	11669.1	145	STL 950/23/5,00-H GN	11582.1	143
STL 950/12/5,00-H-HC GN	30532.1	144	STL 950/18/5,00-V GN	11531.1	143	STL 950/23/5,00-H-F GN	13266.1	147
STL 950/12/5,00-V GN	11525.1	143	STL 950/18/5,00-V-F GN	13247.1	147	STL 950/23/5,00-H-G GN	11674.1	145
STL 950/12/5,00-V-F GN	13241.1	147	STL 950/18/5,00-V-G GN	11623.1	145	STL 950/23/5,00-V GN	11536.1	143
STL 950/12/5,00-V-F-HC GN	30592.1	148	STL 950/18/5,08-H GN	11600.1	151	STL 950/23/5,00-V-G GN	13252.1	147
STL 950/12/5,00-V-G GN	11617.1	145	STL 950/18/5,08-H-F GN	13275.1	155	STL 950/23/5,00-V-G GN	11628.1	145
STL 950/12/5,00-V-G-HC GN	30552.1	146	STL 950/18/5,08-H-G GN	11692.1	153	STL 950/23/5,08-H GN	11605.1	151
STL 950/12/5,00-V-HC GN	30512.1	144	STL 950/18/5,08-V GN	11554.1	151	STL 950/23/5,08-H-F GN	13280.1	155
STL 950/12/5,08-H GN	11594.1	151	STL 950/18/5,08-V-F GN	13205.1	155	STL 950/23/5,08-H-G GN	11697.1	153
STL 950/12/5,08-H-F GN	13269.1	155	STL 950/18/5,08-V-G GN	11646.1	153	STL 950/23/5,08-V GN	11559.1	151
STL 950/12/5,08-H-G GN	11686.1	153	STL 950/19/5,00-H GN	11578.1	143	STL 950/23/5,00-V-F GN	13210.1	155
STL 950/12/5,08-V GN	11548.1	151	STL 950/19/5,00-H-F GN	13262.1	147	STL 950/23/5,08-V-G GN	11651.1	153
STL 950/12/5,08-V-F GN	13199.1	155	STL 950/19/5,00-H-G GN	11670.1	145	STL 950/24/5,00-H GN	11583.1	143
STL 950/12/5,08-V-G GN	11640.1	153	STL 950/19/5,00-V GN	11532.1	143	STL 950/24/5,00-H-F GN	13267.1	147
STL 950/13/5,00-H GN	11572.1	143	STL 950/19/5,00-V-F GN	13248.1	147	STL 950/24/5,00-H-G GN	11675.1	145
STL 950/13/5,00-H-F GN	13256.1	147	STL 950/19/5,00-V-G GN	11624.1	145	STL 950/24/5,00-V GN	11537.1	143
STL 950/13/5,00-H-G GN	11664.1	145	STL 950/19/5,08-H GN	11601.1	151	STL 950/24/5,00-V-F GN	13253.1	147
STL 950/13/5,00-V GN	11526.1	143	STL 950/19/5,08-H-F GN	13276.1	155	STL 950/24/5,00-V-G GN	11629.1	145
STL 950/13/5,00-V-F GN	13242.1	147	STL 950/19/5,08-H-G GN	11693.1	153	STL 950/24/5,08-H GN	11606.1	151
STL 950/13/5,00-V-G GN	11618.1	145	STL 950/19/5,08-V GN	11555.1	151	STL 950/24/5,08-H-F GN	13281.1	155
STL 950/13/5,08-H GN	11595.1	151	STL 950/19/5,08-V-F GN	13206.1	155	STL 950/24/5,08-H-G GN	11698.1	153
STL 950/13/5,08-H-F GN	13270.1	155	STL 950/19/5,08-V-G GN	11647.1	153	STL 950/24/5,08-V GN	11560.1	151
STL 950/13/5,08-H-G GN	11687.1	153	STL 950/2/5,00-H GN	11561.1	143	STL 950/24/5,08-V-F GN	13211.1	155
STL 950/13/5,08-V GN	11549.1	151	STL 950/2/5,00-H-F GN	11781.1	147	STL 950/24/5,08-V-G GN	11652.1	153
STL 950/13/5,08-V-F GN	13200.1	155	STL 950/2/5,00-H-F-HC GN	30602.1	148	STL 950/3/5,00-H GN	11562.1	143
STL 950/13/5,08-V-G GN	11641.1	153	STL 950/2/5,00-H-G GN	11653.1	145	STL 950/3/5,00-H-F GN	11782.1	147
STL 950/14/5,00-H GN	11573.1	143	STL 950/2/5,00-H-G-HC GN	30562.1	146	STL 950/3/5,00-H-F-HC GN	30603.1	148
STL 950/14/5,00-H-F GN	13257.1	147	STL 950/2/5,00-H-HC GN	30522.1	144	STL 950/3/5,00-H-G GN	11654.1	145
STL 950/14/5,00-H-G GN	11665.1	145	STL 950/2/5,00-V GN	11515.1	143	STL 950/3/5,00-H-G-HC GN	30563.1	146
STL 950/14/5,00-V GN	11527.1	143	STL 950/2/5,00-V-F GN	12201.1	147	STL 950/3/5,00-H-HC GN	30523.1	144
STL 950/14/5,00-V-F GN	13243.1	147	STL 950/2/5,00-V-F-HC GN	30582.1	148	STL 950/3/5,00-V GN	11516.1	143
STL 950/14/5,00-V-G GN	11619.1	145	STL 950/2/5,00-V-G GN	11607.1	145	STL 950/3/5,00-V-F GN	12202.1	147
STL 950/14/5,08-H GN	11596.1	151	STL 950/2/5,00-V-G-HC GN	30542.1	146	STL 950/3/5,00-V-F-HC GN	30583.1	148
STL 950/14/5,08-H-F GN	13271.1	155	STL 950/2/5,00-V-HC GN	30502.1	144	STL 950/3/5,00-V-G GN	11608.1	145
STL 950/14/5,08-H-G GN	11688.1	153	STL 950/2/5,08-H GN	11584.1	151	STL 950/3/5,00-V-G-HC GN	30543.1	146
STL 950/14/5,08-V GN	11550.1	151	STL 950/2/5,08-H-F GN	11790.1	155	STL 950/3/5,00-V-HC GN	30503.1	144
STL 950/14/5,08-V-F GN	13201.1	155	STL 950/2/5,08-H-G GN	11676.1	153	STL 950/3/5,08-H GN	11585.1	151
STL 950/14/5,08-V-G GN	11642.1	153	STL 950/2/5,08-V GN	11538.1	151	STL 950/3/5,08-H-F GN	11791.1	155
STL 950/15/5,00-H GN	11574.1	143	STL 950/2/5,08-V-F GN	12210.1	155	STL 950/3/5,08-H-G GN	11677.1	153
STL 950/15/5,00-H-F GN	13258.1	147	STL 950/2/5,08-V-G GN	11630.1	153	STL 950/3/5,08-V GN	11539.1	151
STL 950/15/5,00-H-G GN	11666.1	145	STL 950/20/5,00-H GN	11579.1	143	STL 950/3/5,08-V-F GN	12211.1	155
STL 950/15/5,00-V GN	11528.1	143	STL 950/20/5,00-H-F GN	13263.1	147	STL 950/3/5,08-V-G GN	11631.1	153

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
STL 950/4/5,00-H GN	11563.1	143	STL 950/8/5,00-H-G-HC GN	30568.1	146	STL 960/6/7,62-H GN	11718.1	162
STL 950/4/5,00-H-F GN	11783.1	147	STL 950/8/5,00-H-HC GN	30528.1	144	STL 960/6/7,62-H-G GN	11748.1	163
STL 950/4/5,00-H-F-HC GN	30604.1	148	STL 950/8/5,00-V GN	11521.1	143	STL 960/6/7,62-V GN	11703.1	162
STL 950/4/5,00-H-G GN	11655.1	145	STL 950/8/5,00-V-F GN	12207.1	147	STL 960/6/7,62-V-G GN	11733.1	163
STL 950/4/5,00-H-G-HC GN	30564.1	146	STL 950/8/5,00-V-F-HC GN	30588.1	148	STL 960/7/7,62-H GN	11719.1	162
STL 950/4/5,00-H-HC GN	30524.1	144	STL 950/8/5,00-V-G GN	11613.1	145	STL 960/7/7,62-H-G GN	11749.1	163
STL 950/4/5,00-V GN	11517.1	143	STL 950/8/5,00-V-G-HC GN	30548.1	146	STL 960/7/7,62-V GN	11704.1	162
STL 950/4/5,00-V-F GN	12203.1	147	STL 950/8/5,00-V-HC GN	30508.1	144	STL 960/7/7,62-V-G GN	11734.1	163
STL 950/4/5,00-V-F-HC GN	30584.1	148	STL 950/8/5,08-H GN	11590.1	151	STL 960/8/7,62-H GN	11720.1	162
STL 950/4/5,00-V-G GN	11609.1	145	STL 950/8/5,08-H-F GN	11796.1	155	STL 960/8/7,62-H-G GN	11750.1	163
STL 950/4/5,00-V-G-HC GN	30544.1	146	STL 950/8/5,08-H-G GN	11682.1	153	STL 960/8/7,62-V GN	11705.1	162
STL 950/4/5,00-V-HC GN	30504.1	144	STL 950/8/5,08-V GN	11544.1	151	STL 960/8/7,62-V-G GN	11735.1	163
STL 950/4/5,08-H GN	11586.1	151	STL 950/8/5,08-V-F GN	12216.1	155	STL 960/9/7,62-H GN	11721.1	162
STL 950/4/5,08-H-F GN	11792.1	155	STL 950/8/5,08-V-G GN	11636.1	153	STL 960/9/7,62-H-G GN	11751.1	163
STL 950/4/5,08-H-G GN	11678.1	153	STL 950/9/5,00-H GN	11568.1	143	STL 960/9/7,62-V GN	11706.1	162
STL 950/4/5,08-V GN	11540.1	151	STL 950/9/5,00-H-F GN	11788.1	147	STL 960/9/7,62-V-G GN	11736.1	163
STL 950/4/5,08-V-F GN	12212.1	155	STL 950/9/5,00-H-F-HC GN	30609.1	148	STL 970/10/5,08-H GN	11778.1	159
STL 950/4/5,08-V-G GN	11632.1	153	STL 950/9/5,00-H-G GN	11660.1	145	STL 970/10/5,08-H-F GN	13470.1	161
STL 950/5/5,00-H GN	11564.1	143	STL 950/9/5,00-H-G-HC GN	30569.1	146	STL 970/10/5,08-H-G GN	13448.1	160
STL 950/5/5,00-H-F GN	11784.1	147	STL 950/9/5,00-H-HC GN	30529.1	144	STL 970/10/5,08-V GN	11767.1	159
STL 950/5/5,00-H-F-HC GN	30605.1	148	STL 950/9/5,00-V GN	11522.1	143	STL 970/10/5,08-V-F GN	13459.1	161
STL 950/5/5,00-H-G GN	11656.1	145	STL 950/9/5,00-V-F GN	12208.1	147	STL 970/10/5,08-V-G GN	13437.1	160
STL 950/5/5,00-H-G-HC GN	30565.1	146	STL 950/9/5,00-V-F-HC GN	30589.1	148	STL 970/11/5,08-H GN	11779.1	159
STL 950/5/5,00-H-HC GN	30525.1	144	STL 950/9/5,00-V-G GN	11614.1	145	STL 970/11/5,08-H-F GN	13471.1	161
STL 950/5/5,00-V GN	11518.1	143	STL 950/9/5,00-V-G-HC GN	30549.1	146	STL 970/11/5,08-H-G GN	13449.1	160
STL 950/5/5,00-V-F GN	12204.1	147	STL 950/9/5,00-V-HC GN	30509.1	144	STL 970/11/5,08-V GN	11768.1	159
STL 950/5/5,00-V-F-HC GN	30585.1	148	STL 950/9/5,08-H GN	11591.1	151	STL 970/11/5,08-V-F GN	13460.1	161
STL 950/5/5,00-V-G GN	11610.1	145	STL 950/9/5,08-H-F GN	11797.1	155	STL 970/11/5,08-V-G GN	13438.1	160
STL 950/5/5,00-V-G-HC GN	30545.1	146	STL 950/9/5,08-H-G GN	11683.1	153	STL 970/12/5,08-H GN	11780.1	159
STL 950/5/5,00-V-HC GN	30505.1	144	STL 950/9/5,08-V GN	11545.1	151	STL 970/12/5,08-H-F GN	13472.1	161
STL 950/5/5,08-H GN	11587.1	151	STL 950/9/5,08-V-F GN	12217.1	155	STL 970/12/5,08-H-G GN	13450.1	160
STL 950/5/5,08-H-F GN	11793.1	155	STL 950/9/5,08-V-G GN	11637.1	153	STL 970/12/5,08-V GN	11769.1	159
STL 950/5/5,08-H-G GN	11679.1	153	STL 960/10/7,62-H GN	11722.1	162	STL 970/12/5,08-V-F GN	13461.1	161
STL 950/5/5,08-V GN	11541.1	151	STL 960/10/7,62-H-G GN	11752.1	163	STL 970/12/5,08-V-G GN	13439.1	160
STL 950/5/5,08-V-F GN	12213.1	155	STL 960/10/7,62-V GN	11707.1	162	STL 970/13/5,08-H GN	12750.1	159
STL 950/5/5,08-V-G GN	11633.1	153	STL 960/10/7,62-V-G GN	11737.1	163	STL 970/13/5,08-V GN	12738.1	159
STL 950/6/5,00-H GN	11565.1	143	STL 960/11/7,62-H GN	11723.1	162	STL 970/14/5,08-H GN	12751.1	159
STL 950/6/5,00-H-F GN	11785.1	147	STL 960/11/7,62-H-G GN	11753.1	163	STL 970/14/5,08-V GN	12739.1	159
STL 950/6/5,00-H-F-HC GN	30606.1	148	STL 960/11/7,62-V GN	11708.1	162	STL 970/15/5,08-H GN	12752.1	159
STL 950/6/5,00-H-G GN	11657.1	145	STL 960/11/7,62-V-G GN	11738.1	163	STL 970/15/5,08-V GN	12740.1	159
STL 950/6/5,00-H-G-HC GN	30566.1	146	STL 960/12/7,62-H GN	11724.1	162	STL 970/16/5,08-H GN	12753.1	159
STL 950/6/5,00-H-HC GN	30526.1	144	STL 960/12/7,62-H-G GN	11754.1	163	STL 970/16/5,08-V GN	12741.1	159
STL 950/6/5,00-V GN	11519.1	143	STL 960/12/7,62-V GN	11709.1	162	STL 970/17/5,08-H GN	12754.1	159
STL 950/6/5,00-V-F GN	12205.1	147	STL 960/12/7,62-V-G GN	11739.1	163	STL 970/17/5,08-V GN	12742.1	159
STL 950/6/5,00-V-F-HC GN	30586.1	148	STL 960/13/7,62-H GN	11725.1	162	STL 970/18/5,08-H GN	12755.1	159
STL 950/6/5,00-V-G GN	11611.1	145	STL 960/13/7,62-H-G GN	11755.1	163	STL 970/18/5,08-V GN	12743.1	159
STL 950/6/5,00-V-G-HC GN	30546.1	146	STL 960/13/7,62-V GN	11710.1	162	STL 970/19/5,08-H GN	12756.1	159
STL 950/6/5,00-V-HC GN	30506.1	144	STL 960/13/7,62-V-G GN	11740.1	163	STL 970/19/5,08-V GN	12744.1	159
STL 950/6/5,08-H GN	11588.1	151	STL 960/14/7,62-H GN	11726.1	162	STL 970/2/5,08-H GN	11770.1	159
STL 950/6/5,08-H-F GN	11794.1	155	STL 960/14/7,62-H-G GN	11756.1	163	STL 970/2/5,08-H-F GN	13462.1	161
STL 950/6/5,08-H-G GN	11680.1	153	STL 960/14/7,62-V GN	11711.1	162	STL 970/2/5,08-H-G GN	13440.1	160
STL 950/6/5,08-V GN	11542.1	151	STL 960/14/7,62-V-G GN	11741.1	163	STL 970/2/5,08-V GN	11759.1	159
STL 950/6/5,08-V-F GN	12214.1	155	STL 960/15/7,62-H GN	11727.1	162	STL 970/2/5,08-V-F GN	13451.1	161
STL 950/6/5,08-V-G GN	11634.1	153	STL 960/15/7,62-H-G GN	11757.1	163	STL 970/2/5,08-V-G GN	13429.1	160
STL 950/7/5,00-H GN	11566.1	143	STL 960/15/7,62-V GN	11712.1	162	STL 970/20/5,08-H GN	12757.1	159
STL 950/7/5,00-H-F GN	11786.1	147	STL 960/15/7,62-V-G GN	11742.1	163	STL 970/20/5,08-V GN	12745.1	159
STL 950/7/5,00-H-F-HC GN	30607.1	148	STL 960/16/7,62-H GN	11728.1	162	STL 970/21/5,08-H GN	12758.1	159
STL 950/7/5,00-H-G GN	11658.1	145	STL 960/16/7,62-H-G GN	11758.1	163	STL 970/21/5,08-V GN	12746.1	159
STL 950/7/5,00-H-G-HC GN	30567.1	146	STL 960/16/7,62-V GN	11713.1	162	STL 970/22/5,08-H GN	12759.1	159
STL 950/7/5,00-H-HC GN	30527.1	144	STL 960/16/7,62-V-G GN	11743.1	163	STL 970/22/5,08-V GN	12747.1	159
STL 950/7/5,00-V GN	11520.1	143	STL 960/2/7,62-H GN	11714.1	162	STL 970/23/5,08-H GN	12760.1	159
STL 950/7/5,00-V-F GN	12206.1	147	STL 960/2/7,62-H-G GN	11744.1	163	STL 970/23/5,08-V GN	12748.1	159
STL 950/7/5,00-V-F-HC GN	30587.1	148	STL 960/2/7,62-V GN	11699.1	162	STL 970/24/5,08-H GN	12761.1	159
STL 950/7/5,00-V-G GN	11612.1	145	STL 960/2/7,62-V-G GN	11729.1	163	STL 970/24/5,08-V GN	12749.1	159
STL 950/7/5,00-V-G-HC GN	30547.1	146	STL 960/3/7,62-H GN	11715.1	162	STL 970/3/5,08-H GN	11771.1	159
STL 950/7/5,00-V-HC GN	30507.1	144	STL 960/3/7,62-H-G GN	11745.1	163	STL 970/3/5,08-H-F GN	13463.1	161
STL 950/7/5,08-H GN	11589.1	151	STL 960/3/7,62-V GN	11700.1	162	STL 970/3/5,08-H-G GN	13441.1	160
STL 950/7/5,08-H-F GN	11795.1	155	STL 960/3/7,62-V-G GN	11730.1	163	STL 970/3/5,08-V GN	11760.1	159
STL 950/7/5,08-H-G GN	11681.1	153	STL 960/4/7,62-H GN	11716.1	162	STL 970/3/5,08-V-F GN	13452.1	161
STL 950/7/5,08-V GN	11543.1	151	STL 960/4/7,62-H-G GN	11746.1	163	STL 970/3/5,08-V-G GN	13430.1	160
STL 950/7/5,08-V-F GN	12215.1	155	STL 960/4/7,62-V GN	11701.1	162	STL 970/4/5,08-H GN	11772.1	159
STL 950/7/5,08-V-G GN	11635.1	153	STL 960/4/7,62-V-G GN	11731.1	163	STL 970/4/5,08-H-F GN	13464.1	161
STL 950/8/5,00-H GN	11567.1	143	STL 960/5/7,62-H GN	11717.1	162	STL 970/4/5,08-H-G GN	13442.1	160
STL 950/8/5,00-H-F GN	11787.1	147	STL 960/5/7,62-H-G GN	11747.1	163	STL 970/4/5,08-V GN	11761.1	159
STL 950/8/5,00-H-F-HC GN	30608.1	148	STL 960/5/7,62-V GN	11702.1	162	STL 970/4/5,08-V-F GN	13453.1	161
STL 950/8/5,00-H-G GN	11659.1	145	STL 960/5/7,62-V-G GN	11732.1	163	STL 970/4/5,08-V-G GN	13431.1	160

Type	Cat. no.	Page	Type	Cat. no.	Page	Type	Cat. no.	Page
STL 970/5/5,08-H GN	11773.1	159	STL 975/9/5,00-V-G GN	11806.1	149	STLZ 1550/8/7,62-H-G GN	31838.1	165
STL 970/5/5,08-H-F GN	13465.1	161	STL 990/10/5,08-G GN	11853.1	157	STLZ 1550/8/7,62-V-F GN	31848.1	166
STL 970/5/5,08-H-G GN	13443.1	160	STL 990/11/5,08-G GN	11854.1	157	STLZ 1550/8/7,62-V-G GN	31828.1	165
STL 970/5/5,08-V GN	11762.1	159	STL 990/12/5,08-G GN	11855.1	157	STLZ 1550/9/7,62-H-F GN	31859.1	166
STL 970/5/5,08-V-F GN	13454.1	161	STL 990/13/5,08-G GN	11856.1	157	STLZ 1550/9/7,62-H-G GN	31839.1	165
STL 970/5/5,08-V-G GN	13432.1	160	STL 990/14/5,08-G GN	11857.1	157	STLZ 1550/9/7,62-V-F GN	31849.1	166
STL 970/6/5,08-H GN	11774.1	159	STL 990/15/5,08-G GN	11858.1	157	STLZ 1550/9/7,62-V-G GN	31829.1	165
STL 970/6/5,08-H-F GN	13466.1	161	STL 990/16/5,08-G GN	11859.1	157	STLZ 950/10/5,08-H-F-HC GN	30730.1	156
STL 970/6/5,08-H-G GN	13444.1	160	STL 990/17/5,08-G GN	11860.1	157	STLZ 950/10/5,08-H-G-HC GN	30690.1	154
STL 970/6/5,08-V GN	11763.1	159	STL 990/18/5,08-G GN	11861.1	157	STLZ 950/10/5,08-H-HC GN	30650.1	152
STL 970/6/5,08-V-F GN	13455.1	161	STL 990/19/5,08-G GN	11862.1	157	STLZ 950/10/5,08-V-F-HC GN	30710.1	156
STL 970/6/5,08-V-G GN	13433.1	160	STL 990/2/5,08-G GN	11845.1	157	STLZ 950/10/5,08-V-G-HC GN	30670.1	154
STL 970/7/5,08-H GN	11775.1	159	STL 990/20/5,08-G GN	11863.1	157	STLZ 950/10/5,08-V-HC GN	30630.1	152
STL 970/7/5,08-H-F GN	13467.1	161	STL 990/21/5,08-G GN	11864.1	157	STLZ 950/11/5,08-H-F-HC GN	30731.1	156
STL 970/7/5,08-H-G GN	13445.1	160	STL 990/22/5,08-G GN	11865.1	157	STLZ 950/11/5,08-H-G-HC GN	30691.1	154
STL 970/7/5,08-V GN	11764.1	159	STL 990/23/5,08-G GN	11866.1	157	STLZ 950/11/5,08-H-HC GN	30651.1	152
STL 970/7/5,08-V-F GN	13456.1	161	STL 990/24/5,08-G GN	11867.1	157	STLZ 950/11/5,08-V-F-HC GN	30711.1	156
STL 970/7/5,08-V-G GN	13434.1	160	STL 990/3/5,08-G GN	11846.1	157	STLZ 950/11/5,08-V-G-HC GN	30671.1	154
STL 970/8/5,08-H GN	11776.1	159	STL 990/4/5,08-G GN	11847.1	157	STLZ 950/11/5,08-V-HC GN	30631.1	152
STL 970/8/5,08-H-F GN	13468.1	161	STL 990/5/5,08-G GN	11848.1	157	STLZ 950/12/5,08-H-F-HC GN	30732.1	156
STL 970/8/5,08-H-G GN	13446.1	160	STL 990/6/5,08-G GN	11849.1	157	STLZ 950/12/5,08-H-G-HC GN	30692.1	154
STL 970/8/5,08-V GN	11765.1	159	STL 990/7/5,08-G GN	11850.1	157	STLZ 950/12/5,08-H-HC GN	30652.1	152
STL 970/8/5,08-V-F GN	13457.1	161	STL 990/8/5,08-G GN	11851.1	157	STLZ 950/12/5,08-V-F-HC GN	30712.1	156
STL 970/8/5,08-V-G GN	13435.1	160	STL 990/9/5,08-G GN	11852.1	157	STLZ 950/12/5,08-V-G-HC GN	30672.1	154
STL 970/9/5,08-H GN	11777.1	159	STLZ 1520/10/5,08-H-G GN	31810.1	150	STLZ 950/12/5,08-V-HC GN	30632.1	152
STL 970/9/5,08-H-F GN	13469.1	161	STLZ 1520/10/5,08-V-G GN	31790.1	150	STLZ 950/2/5,08-H-F-HC GN	30722.1	156
STL 970/9/5,08-H-G GN	13447.1	160	STLZ 1520/11/5,08-H-G GN	31811.1	150	STLZ 950/2/5,08-H-G-HC GN	30682.1	154
STL 970/9/5,08-V GN	11766.1	159	STLZ 1520/11/5,08-V-G GN	31791.1	150	STLZ 950/2/5,08-H-HC GN	30642.1	152
STL 970/9/5,08-V-F GN	13458.1	161	STLZ 1520/12/5,08-H-G GN	31812.1	150	STLZ 950/2/5,08-V-F-HC GN	30702.1	156
STL 970/9/5,08-V-G GN	13436.1	160	STLZ 1520/12/5,08-V-G GN	31792.1	150	STLZ 950/2/5,08-V-G-HC GN	30662.1	154
STL 975/10/5,00-H-G GN	11830.1	149	STLZ 1520/2/5,08-H-G GN	31802.1	150	STLZ 950/2/5,08-V-HC GN	30622.1	152
STL 975/10/5,00-V-G GN	11807.1	149	STLZ 1520/2/5,08-V-G GN	31782.1	150	STLZ 950/3/5,08-H-F-HC GN	30723.1	156
STL 975/11/5,00-H-G GN	11831.1	149	STLZ 1520/3/5,08-H-G GN	31803.1	150	STLZ 950/3/5,08-H-G-HC GN	30683.1	154
STL 975/11/5,00-V-G GN	11808.1	149	STLZ 1520/3/5,08-V-G GN	31783.1	150	STLZ 950/3/5,08-H-HC GN	30643.1	152
STL 975/12/5,00-H-G GN	11832.1	149	STLZ 1520/4/5,08-H-G GN	31804.1	150	STLZ 950/3/5,08-V-F-HC GN	30703.1	156
STL 975/12/5,00-V-G GN	11809.1	149	STLZ 1520/4/5,08-V-G GN	31784.1	150	STLZ 950/3/5,08-V-G-HC GN	30663.1	154
STL 975/13/5,00-H-G GN	11833.1	149	STLZ 1520/5/5,08-H-G GN	31805.1	150	STLZ 950/3/5,08-V-HC GN	30623.1	152
STL 975/13/5,00-V-G GN	11810.1	149	STLZ 1520/5/5,08-V-G GN	31785.1	150	STLZ 950/4/5,08-H-F-HC GN	30724.1	156
STL 975/14/5,00-H-G GN	11834.1	149	STLZ 1520/6/5,08-H-G GN	31806.1	150	STLZ 950/4/5,08-H-G-HC GN	30684.1	154
STL 975/14/5,00-V-G GN	11811.1	149	STLZ 1520/6/5,08-V-G GN	31786.1	150	STLZ 950/4/5,08-H-HC GN	30644.1	152
STL 975/15/5,00-H-G GN	11835.1	149	STLZ 1520/7/5,08-H-G GN	31807.1	150	STLZ 950/4/5,08-V-F-HC GN	30704.1	156
STL 975/15/5,00-V-G GN	11812.1	149	STLZ 1520/7/5,08-V-G GN	31787.1	150	STLZ 950/4/5,08-V-G-HC GN	30664.1	154
STL 975/16/5,00-H-G GN	11836.1	149	STLZ 1520/8/5,08-H-G GN	31808.1	150	STLZ 950/4/5,08-V-HC GN	30624.1	152
STL 975/16/5,00-V-G GN	11813.1	149	STLZ 1520/8/5,08-V-G GN	31788.1	150	STLZ 950/5/5,08-H-F-HC GN	30725.1	156
STL 975/17/5,00-H-G GN	11837.1	149	STLZ 1520/9/5,08-H-G GN	31809.1	150	STLZ 950/5/5,08-H-G-HC GN	30685.1	154
STL 975/17/5,00-V-G GN	11814.1	149	STLZ 1520/9/5,08-V-G GN	31789.1	150	STLZ 950/5/5,08-H-HC GN	30645.1	152
STL 975/18/5,00-H-G GN	11838.1	149	STLZ 1550/10/7,62-H-F GN	31860.1	166	STLZ 950/5/5,08-V-F-HC GN	30705.1	156
STL 975/18/5,00-V-G GN	11815.1	149	STLZ 1550/10/7,62-H-G GN	31840.1	165	STLZ 950/5/5,08-V-G-HC GN	30665.1	154
STL 975/19/5,00-H-G GN	11839.1	149	STLZ 1550/10/7,62-V-F GN	31850.1	166	STLZ 950/5/5,08-V-HC GN	30625.1	152
STL 975/19/5,00-V-G GN	11816.1	149	STLZ 1550/10/7,62-V-G GN	31830.1	165	STLZ 950/6/5,08-H-F-HC GN	30726.1	156
STL 975/2/5,00-H-G GN	11822.1	149	STLZ 1550/2/7,62-H-F GN	31852.1	166	STLZ 950/6/5,08-H-G-HC GN	30686.1	154
STL 975/2/5,00-V-G GN	11799.1	149	STLZ 1550/2/7,62-H-G GN	31832.1	165	STLZ 950/6/5,08-H-HC GN	30646.1	152
STL 975/20/5,00-H-G GN	11840.1	149	STLZ 1550/2/7,62-V-F GN	31842.1	166	STLZ 950/6/5,08-V-F-HC GN	30706.1	156
STL 975/20/5,00-V-G GN	11817.1	149	STLZ 1550/2/7,62-V-G GN	31822.1	165	STLZ 950/6/5,08-V-G-HC GN	30666.1	154
STL 975/21/5,00-H-G GN	11841.1	149	STLZ 1550/3/7,62-H-F GN	31853.1	166	STLZ 950/6/5,08-V-HC GN	30626.1	152
STL 975/21/5,00-V-G GN	11818.1	149	STLZ 1550/3/7,62-H-G GN	31833.1	165	STLZ 950/7/5,08-H-F-HC GN	30727.1	156
STL 975/22/5,00-H-G GN	11842.1	149	STLZ 1550/3/7,62-V-F GN	31843.1	166	STLZ 950/7/5,08-H-G-HC GN	30687.1	154
STL 975/22/5,00-V-G GN	11819.1	149	STLZ 1550/3/7,62-V-G GN	31823.1	165	STLZ 950/7/5,08-H-HC GN	30647.1	152
STL 975/23/5,00-H-G GN	11843.1	149	STLZ 1550/4/7,62-H-F GN	31854.1	166	STLZ 950/7/5,08-V-F-HC GN	30707.1	156
STL 975/23/5,00-V-G GN	11820.1	149	STLZ 1550/4/7,62-H-G GN	31834.1	165	STLZ 950/7/5,08-V-G-HC GN	30667.1	154
STL 975/24/5,00-H-G GN	11844.1	149	STLZ 1550/4/7,62-V-F GN	31844.1	166	STLZ 950/7/5,08-V-HC GN	30627.1	152
STL 975/24/5,00-V-G GN	11821.1	149	STLZ 1550/4/7,62-V-G GN	31824.1	165	STLZ 950/8/5,08-H-F-HC GN	30728.1	156
STL 975/3/5,00-H-G GN	11823.1	149	STLZ 1550/5/7,62-H-F GN	31855.1	166	STLZ 950/8/5,08-H-G-HC GN	30688.1	154
STL 975/3/5,00-V-G GN	11800.1	149	STLZ 1550/5/7,62-H-G GN	31835.1	165	STLZ 950/8/5,08-H-HC GN	30648.1	152
STL 975/4/5,00-H-G GN	11824.1	149	STLZ 1550/5/7,62-V-F GN	31845.1	166	STLZ 950/8/5,08-V-F-HC GN	30708.1	156
STL 975/4/5,00-V-G GN	11801.1	149	STLZ 1550/5/7,62-V-G GN	31825.1	165	STLZ 950/8/5,08-V-G-HC GN	30668.1	154
STL 975/5/5,00-H-G GN	11825.1	149	STLZ 1550/6/7,62-H-F GN	31856.1	166	STLZ 950/8/5,08-V-HC GN	30628.1	152
STL 975/5/5,00-V-G GN	11802.1	149	STLZ 1550/6/7,62-H-G GN	31836.1	165	STLZ 950/9/5,08-H-F-HC GN	30729.1	156
STL 975/6/5,00-H-G GN	11826.1	149	STLZ 1550/6/7,62-V-F GN	31846.1	166	STLZ 950/9/5,08-H-G-HC GN	30689.1	154
STL 975/6/5,00-V-G GN	11803.1	149	STLZ 1550/6/7,62-V-G GN	31826.1	165	STLZ 950/9/5,08-H-HC GN	30649.1	152
STL 975/7/5,00-H-G GN	11827.1	149	STLZ 1550/7/7,62-H-F GN	31857.1	166	STLZ 950/9/5,08-V-F-HC GN	30709.1	156
STL 975/7/5,00-V-G GN	11804.1	149	STLZ 1550/7/7,62-H-G GN	31837.1	165	STLZ 950/9/5,08-V-G-HC GN	30669.1	154
STL 975/8/5,00-H-G GN	11828.1	149	STLZ 1550/7/7,62-V-F GN	31847.1	166	STLZ 950/9/5,08-V-HC GN	30629.1	152
STL 975/8/5,00-V-G GN	11805.1	149	STLZ 1550/7/7,62-V-G GN	31827.1	165	STLZ 965/10/7,62-H-F GN	14272.1	164
STL 975/9/5,00-H-G GN	11829.1	149	STLZ 1550/8/7,62-H-F GN	31858.1	166	STLZ 965/10/7,62-V-F GN	14287.1	164

Typen und Bestellnummern numerisch

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
1			5009.3	PK 2,5/9/5,00 OG	41	5077.3	PK 2,5/7/7,62 OG	56
1086.0	SDB 0,6x3,5	176, 177	5010.1	PK 2,5/10/5,00 GN	41	5078.1	PK 2,5/8/7,62 GN	56
1087.0	SDB 0,8x4,0	178-181	5010.3	PK 2,5/10/5,00 OG	41	5078.3	PK 2,5/8/7,62 OG	56
3			5011.1	PK 2,5/11/5,00 GN	41	5079.1	PK 2,5/9/7,62 GN	56
3133.3	AP 0/TS OG	191	5011.3	PK 2,5/11/5,00 OG	41	5079.3	PK 2,5/9/7,62 OG	56
3134.3	AP 0/D OG	191	5012.1	PK 2,5/12/5,00 GN	41	5080.1	PK 2,5/10/7,62 GN	56
3136.0	BK 5,08/2,8 FW 0-9	188	5012.3	PK 2,5/12/5,00 OG	41	5080.3	PK 2,5/10/7,62 OG	56
3137.0	BK 5,08/2,8 FW 1-10	188	5013.1	PK 2,5/13/5,00 GN	41	5081.1	PK 2,5/11/7,62 GN	56
3138.0	BK 5,08/2,8 FW 11-20	188	5013.3	PK 2,5/13/5,00 OG	41	5081.3	PK 2,5/11/7,62 OG	56
3139.0	BK 5,08/2,8 FW 21-30	188	5014.1	PK 2,5/14/5,00 GN	41	5082.1	PK 2,5/12/7,62 GN	56
3140.0	BK 5,08/2,8 FW 31-40	188	5014.3	PK 2,5/14/5,00 OG	41	5082.3	PK 2,5/12/7,62 OG	56
3141.0	BK 5,00/3,8 FW 0-9	188	5015.1	PK 2,5/15/5,00 GN	41	5083.1	PK 2,5/13/7,62 GN	56
3142.0	BK 5,00/3,8 FW 1-10	188	5015.3	PK 2,5/15/5,00 OG	41	5083.3	PK 2,5/13/7,62 OG	56
3143.0	BK 5,00/3,8 FW 11-20	188	5016.1	PK 2,5/16/5,00 GN	41	5084.1	PK 2,5/14/7,62 GN	56
3144.0	BK 5,00/3,8 FW 21-30	188	5016.3	PK 2,5/16/5,00 OG	41	5084.3	PK 2,5/14/7,62 OG	56
3145.0	BK 5,00/3,8 FW 31-40	188	5017.1	PK 2,5/17/5,00 GN	41	5085.1	PK 2,5/15/7,62 GN	56
3146.0	BK 5,08/3,8 FW 0-9	188	5017.3	PK 2,5/17/5,00 OG	41	5085.3	PK 2,5/15/7,62 OG	56
3147.0	BK 5,08/3,8 FW 1-10	188	5018.1	PK 2,5/18/5,00 GN	41	5086.1	PK 2,5/16/7,62 GN	56
3148.0	BK 5,08/3,8 FW 11-20	188	5018.3	PK 2,5/18/5,00 OG	41	5086.3	PK 2,5/16/7,62 OG	56
3149.0	BK 5,08/3,8 FW 21-30	188	5019.1	PK 2,5/19/5,00 GN	41	5102.1	PK 2,5/2/5,08 GN	49
3150.0	BK 5,08/3,8 FW 31-40	188	5019.3	PK 2,5/19/5,00 OG	41	5102.3	PK 2,5/2/5,08 OG	49
3151.0	BK 7,50/3,8 FW 0-9	189	5020.1	PK 2,5/20/5,00 GN	41	5103.1	PK 2,5/3/5,08 GN	49
3152.0	BK 7,50/3,8 FW 1-10	189	5020.3	PK 2,5/20/5,00 OG	41	5103.3	PK 2,5/3/5,08 OG	49
3153.0	BK 7,50/3,8 FW 11-20	189	5021.1	PK 2,5/21/5,00 GN	41	5104.1	PK 2,5/4/5,08 GN	49
3154.0	BK 7,50/3,8 FW 21-30	189	5021.3	PK 2,5/21/5,00 OG	41	5104.3	PK 2,5/4/5,08 OG	49
3155.0	BK 7,50/3,8 FW 31-40	189	5022.1	PK 2,5/22/5,00 GN	41	5105.1	PK 2,5/5/5,08 GN	49
3156.0	BK 7,62/3,8 FW 0-9	189	5022.3	PK 2,5/22/5,00 OG	41	5105.3	PK 2,5/5/5,08 OG	49
3157.0	BK 7,62/3,8 FW 1-10	189	5023.1	PK 2,5/23/5,00 GN	41	5106.1	PK 2,5/6/5,08 GN	49
3158.0	BK 7,62/3,8 FW 11-20	189	5023.3	PK 2,5/23/5,00 OG	41	5106.3	PK 2,5/6/5,08 OG	49
3159.0	BK 7,62/3,8 FW 21-30	189	5024.1	PK 2,5/24/5,00 GN	41	5107.1	PK 2,5/7/5,08 GN	49
3160.0	BK 7,62/3,8 FW 31-40	189	5024.3	PK 2,5/24/5,00 OG	41	5107.3	PK 2,5/7/5,08 OG	49
3171.0	BK 2,50/2,8 neutral	187	5052.1	PK 2,5/2/7,50 GN	55	5108.1	PK 2,5/8/5,08 GN	49
3172.0	BK 2,54/2,8 neutral	187	5052.3	PK 2,5/2/7,50 OG	55	5108.3	PK 2,5/8/5,08 OG	49
3173.0	BK 3,50/2,8 neutral	187	5053.1	PK 2,5/3/7,50 GN	55	5109.1	PK 2,5/9/5,08 GN	49
3174.0	BK 3,81/2,8 neutral	187	5053.3	PK 2,5/3/7,50 OG	55	5109.3	PK 2,5/9/5,08 OG	49
3175.0	BK 5,08/2,8 neutral	188	5054.1	PK 2,5/4/7,50 GN	55	5110.1	PK 2,5/10/5,08 GN	49
3176.0	BK 5,00/3,8 neutral	188	5054.3	PK 2,5/4/7,50 OG	55	5110.3	PK 2,5/10/5,08 OG	49
3177.0	BK 5,08/3,8 neutral	188	5055.1	PK 2,5/5/7,50 GN	55	5111.1	PK 2,5/11/5,08 GN	49
3178.0	BK 7,50/3,8 neutral	189	5055.3	PK 2,5/5/7,50 OG	55	5111.3	PK 2,5/11/5,08 OG	49
3179.0	BK 7,62/3,8 neutral	189	5056.1	PK 2,5/6/7,50 GN	55	5112.1	PK 2,5/12/5,08 GN	49
3180.0	BK 2,50/2,8 So	187	5056.3	PK 2,5/6/7,50 OG	55	5112.3	PK 2,5/12/5,08 OG	49
3181.0	BK 2,54/2,8 So	187	5057.1	PK 2,5/7/7,50 GN	55	5113.1	PK 2,5/13/5,08 GN	49
3182.0	BK 3,50/2,8 So	187	5057.3	PK 2,5/7/7,50 OG	55	5113.3	PK 2,5/13/5,08 OG	49
3183.0	BK 3,81/2,8 So	187	5058.1	PK 2,5/8/7,50 GN	55	5114.1	PK 2,5/14/5,08 GN	49
3184.0	BK 5,08/2,8 So/10	188	5058.3	PK 2,5/8/7,50 OG	55	5114.3	PK 2,5/14/5,08 OG	49
3185.0	BK 5,00/3,8 So	188	5059.1	PK 2,5/9/7,50 GN	55	5115.1	PK 2,5/15/5,08 GN	49
3186.0	BK 5,08/3,8 So	188	5059.3	PK 2,5/9/7,50 OG	55	5115.3	PK 2,5/15/5,08 OG	49
3187.0	BK 7,50/3,8 So	189	5060.1	PK 2,5/10/7,50 GN	55	5116.1	PK 2,5/16/5,08 GN	49
3188.0	BK 7,62/3,8 So	189	5060.3	PK 2,5/10/7,50 OG	55	5116.3	PK 2,5/16/5,08 OG	49
4			5061.1	PK 2,5/11/7,50 GN	55	5117.1	PK 2,5/17/5,08 GN	49
4560.0	BS RS	191	5061.3	PK 2,5/11/7,50 OG	55	5117.3	PK 2,5/17/5,08 OG	49
5			5062.1	PK 2,5/12/7,50 GN	55	5118.1	PK 2,5/18/5,08 GN	49
5002.1	PK 2,5/2/5,00 GN	41	5062.3	PK 2,5/12/7,50 OG	55	5118.3	PK 2,5/18/5,08 OG	49
5002.3	PK 2,5/2/5,00 OG	41	5063.1	PK 2,5/13/7,50 GN	55	5119.1	PK 2,5/19/5,08 GN	49
5003.1	PK 2,5/3/5,00 GN	41	5063.3	PK 2,5/13/7,50 OG	55	5119.3	PK 2,5/19/5,08 OG	49
5003.3	PK 2,5/3/5,00 OG	41	5064.1	PK 2,5/14/7,50 GN	55	5120.1	PK 2,5/20/5,08 GN	49
5004.1	PK 2,5/4/5,00 GN	41	5064.3	PK 2,5/14/7,50 OG	55	5120.3	PK 2,5/20/5,08 OG	49
5004.3	PK 2,5/4/5,00 OG	41	5065.1	PK 2,5/15/7,50 GN	55	5121.1	PK 2,5/21/5,08 GN	49
5005.1	PK 2,5/5/5,00 GN	41	5065.3	PK 2,5/15/7,50 OG	55	5121.3	PK 2,5/21/5,08 OG	49
5005.3	PK 2,5/5/5,00 OG	41	5066.1	PK 2,5/16/7,50 GN	55	5122.1	PK 2,5/22/5,08 GN	49
5006.1	PK 2,5/6/5,00 GN	41	5066.3	PK 2,5/16/7,50 OG	55	5122.3	PK 2,5/22/5,08 OG	49
5006.3	PK 2,5/6/5,00 OG	41	5072.1	PK 2,5/2/7,62 GN	56	5123.1	PK 2,5/23/5,08 GN	49
5007.1	PK 2,5/7/5,00 GN	41	5072.3	PK 2,5/2/7,62 OG	56	5123.3	PK 2,5/23/5,08 OG	49
5007.3	PK 2,5/7/5,00 OG	41	5073.1	PK 2,5/3/7,62 GN	56	5124.1	PK 2,5/24/5,08 GN	49
5008.1	PK 2,5/8/5,00 GN	41	5073.3	PK 2,5/3/7,62 OG	56	5124.3	PK 2,5/24/5,08 OG	49
5008.3	PK 2,5/8/5,00 OG	41	5074.1	PK 2,5/4/7,62 GN	56	5204.1	PKDL 2,5/4/5,00 GN	47
5009.1	PK 2,5/9/5,00 GN	41	5074.3	PK 2,5/4/7,62 OG	56	5204.3	PKDR 2,5/4/5,00 OG	47
			5075.1	PK 2,5/5/7,62 GN	56	5206.1	PKDL 2,5/6/5,00 GN	47
			5075.3	PK 2,5/5/7,62 OG	56	5206.3	PKDR 2,5/6/5,00 OG	47
			5076.1	PK 2,5/6/7,62 GN	56	5208.1	PKDL 2,5/8/5,00 GN	47
			5076.3	PK 2,5/6/7,62 OG	56	5208.3	PKDR 2,5/8/5,00 OG	47
			5077.1	PK 2,5/7/7,62 GN	56	5210.1	PKDL 2,5/10/5,00 GN	47

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
5210.3	PKDR 2,5/10/5,00 OG	47	10010.4	PK 100/11/5,00-V DG	70	10054.1	PK 100/11/5,00-V-BL GN	71
5212.1	PKDL 2,5/12/5,00 GN	47	10011.1	PK 100/12/5,00-V GN	70	10054.4	PK 100/11/5,00-V-BL DG	71
5212.3	PKDR 2,5/12/5,00 OG	47	10011.4	PK 100/12/5,00-V DG	70	10055.1	PK 100/12/5,00-V-BL GN	71
5214.1	PKDL 2,5/14/5,00 GN	47	10012.1	PK 100/2/5,00-H GN	70	10055.4	PK 100/12/5,00-V-BL DG	71
5214.3	PKDR 2,5/14/5,00 OG	47	10012.4	PK 100/2/5,00-H DG	70	10056.1	PK 100/2/5,00-H-BL GN	71
5216.1	PKDL 2,5/16/5,00 GN	47	10013.1	PK 100/3/5,00-H GN	70	10056.4	PK 100/2/5,00-H-BL DG	71
5216.3	PKDR 2,5/16/5,00 OG	47	10013.4	PK 100/3/5,00-H DG	70	10057.1	PK 100/3/5,00-H-BL GN	71
5218.1	PKDL 2,5/18/5,00 GN	47	10014.1	PK 100/4/5,00-H GN	70	10057.4	PK 100/3/5,00-H-BL DG	71
5218.3	PKDR 2,5/18/5,00 OG	47	10014.4	PK 100/4/5,00-H DG	70	10058.1	PK 100/4/5,00-H-BL GN	71
5220.1	PKDL 2,5/20/5,00 GN	47	10015.1	PK 100/5/5,00-H GN	70	10058.4	PK 100/4/5,00-H-BL DG	71
5220.3	PKDR 2,5/20/5,00 OG	47	10015.4	PK 100/5/5,00-H DG	70	10059.1	PK 100/5/5,00-H-BL GN	71
5222.1	PKDL 2,5/22/5,00 GN	47	10016.1	PK 100/6/5,00-H GN	70	10059.4	PK 100/5/5,00-H-BL DG	71
5222.3	PKDR 2,5/22/5,00 OG	47	10016.4	PK 100/6/5,00-H DG	70	10060.1	PK 100/6/5,00-H-BL GN	71
5224.1	PKDL 2,5/24/5,00 GN	47	10017.1	PK 100/7/5,00-H GN	70	10060.4	PK 100/6/5,00-H-BL DG	71
5224.3	PKDR 2,5/24/5,00 OG	47	10017.4	PK 100/7/5,00-H DG	70	10061.1	PK 100/7/5,00-H-BL GN	71
5304.1	PKDL 2,5/4/5,08 GN	51	10018.1	PK 100/8/5,00-H GN	70	10061.4	PK 100/7/5,00-H-BL DG	71
5304.3	PKDR 2,5/4/5,08 OG	52	10018.4	PK 100/8/5,00-H DG	70	10062.1	PK 100/8/5,00-H-BL GN	71
5306.1	PKDL 2,5/6/5,08 GN	51	10019.1	PK 100/9/5,00-H GN	70	10062.4	PK 100/8/5,00-H-BL DG	71
5306.3	PKDR 2,5/6/5,08 OG	52	10019.4	PK 100/9/5,00-H DG	70	10063.1	PK 100/9/5,00-H-BL GN	71
5308.1	PKDL 2,5/8/5,08 GN	51	10020.1	PK 100/10/5,00-H GN	70	10063.4	PK 100/9/5,00-H-BL DG	71
5308.3	PKDR 2,5/8/5,08 OG	52	10020.4	PK 100/10/5,00-H DG	70	10064.1	PK 100/10/5,00-H-BL GN	71
5310.1	PKDL 2,5/10/5,08 GN	51	10021.1	PK 100/11/5,00-H GN	70	10064.4	PK 100/10/5,00-H-BL DG	71
5310.3	PKDR 2,5/10/5,08 OG	52	10021.4	PK 100/11/5,00-H DG	70	10065.1	PK 100/11/5,00-H-BL GN	71
5312.1	PKDL 2,5/12/5,08 GN	51	10022.1	PK 100/12/5,00-H GN	70	10065.4	PK 100/11/5,00-H-BL DG	71
5312.3	PKDR 2,5/12/5,08 OG	52	10022.4	PK 100/12/5,00-H DG	70	10066.1	PK 100/12/5,00-H-BL GN	71
5314.1	PKDL 2,5/14/5,08 GN	51	10023.1	PK 100/2/10,00-V GN	79	10066.4	PK 100/12/5,00-H-BL DG	71
5314.3	PKDR 2,5/14/5,08 OG	52	10023.4	PK 100/2/10,00-V DG	79	10077.1	PK 104/2/5,00-V GN	72
5316.1	PKDL 2,5/16/5,08 GN	51	10024.1	PK 100/3/10,00-V GN	79	10077.4	PK 104/2/5,00-V DG	72
5316.3	PKDR 2,5/16/5,08 OG	52	10024.4	PK 100/3/10,00-V DG	79	10078.1	PK 104/3/5,00-V GN	72
5318.1	PKDL 2,5/18/5,08 GN	51	10025.1	PK 100/4/10,00-V GN	79	10078.4	PK 104/3/5,00-V DG	72
5318.3	PKDR 2,5/18/5,08 OG	52	10025.4	PK 100/4/10,00-V DG	79	10079.1	PK 104/4/5,00-V GN	72
5320.1	PKDL 2,5/20/5,08 GN	51	10026.1	PK 100/5/10,00-V GN	79	10079.4	PK 104/4/5,00-V DG	72
5320.3	PKDR 2,5/20/5,08 OG	52	10026.4	PK 100/5/10,00-V DG	79	10080.1	PK 104/5/5,00-V GN	72
5322.1	PKDL 2,5/22/5,08 GN	51	10027.1	PK 100/6/10,00-V GN	79	10080.4	PK 104/5/5,00-V DG	72
5322.3	PKDR 2,5/22/5,08 OG	52	10027.4	PK 100/6/10,00-V DG	79	10081.1	PK 104/6/5,00-V GN	72
5324.1	PKDL 2,5/24/5,08 GN	51	10028.1	PK 100/7/10,00-V GN	79	10081.4	PK 104/6/5,00-V DG	72
5324.3	PKDR 2,5/24/5,08 OG	52	10028.4	PK 100/7/10,00-V DG	79	10082.1	PK 104/7/5,00-V GN	72
5675.3	RS-SP 0 2000 mm OG	191	10029.1	PK 100/8/10,00-V GN	79	10082.4	PK 104/7/5,00-V DG	72
5680.3	RS-SP 1 2000 mm OG	191	10029.4	PK 100/8/10,00-V DG	79	10083.1	PK 104/8/5,00-V GN	72
5681.3	AP 1/TS OG	191	10030.1	PK 100/9/10,00-V GN	79	10083.4	PK 104/8/5,00-V DG	72
5682.3	AP 1/D OG	191	10030.4	PK 100/9/10,00-V DG	79	10084.1	PK 104/9/5,00-V GN	72
5683.3	RF SP 1 OG	191	10031.1	PK 100/10/10,00-V GN	79	10084.4	PK 104/9/5,00-V DG	72
5690.3	RS-SP 2 2000 mm OG	191	10031.4	PK 100/10/10,00-V DG	79	10085.1	PK 104/10/5,00-V GN	72
5691.3	AP 2/TS OG	191	10032.1	PK 100/11/10,00-V GN	79	10085.4	PK 104/10/5,00-V DG	72
5692.3	AP 2/D OG	191	10032.4	PK 100/11/10,00-V DG	79	10086.1	PK 104/11/5,00-V GN	72
5693.3	RF SP 2 OG	191	10033.1	PK 100/12/10,00-V GN	79	10086.4	PK 104/11/5,00-V DG	72
5891.0	AP AD 1	191	10033.4	PK 100/12/10,00-V DG	79	10087.1	PK 104/12/5,00-V GN	72
5893.0	AD 1/1000 mm	191	10034.1	PK 100/2/10,00-H GN	80	10087.4	PK 104/12/5,00-V DG	72
5894.0	AD 2/1000 mm	191	10035.1	PK 100/3/10,00-H GN	80	10088.1	PK 114/2/7,50-V GN	77
5895.0	AP AD 2	191	10036.1	PK 100/4/10,00-H GN	80	10088.4	PK 114/2/7,50-V DG	77
9			10037.1	PK 100/5/10,00-H GN	80	10089.1	PK 114/3/7,50-V GN	77
9410.7	PMC BSTR 8x12/21 WH	176, 177	10038.1	PK 100/6/10,00-H GN	80	10089.4	PK 114/3/7,50-V DG	77
9433.7	PMC BSTR 10x12/10 WH	178-181	10039.1	PK 100/7/10,00-H GN	80	10090.1	PK 114/4/7,50-V GN	77
10			10040.1	PK 100/8/10,00-H GN	80	10090.4	PK 114/4/7,50-V DG	77
10001.1	PK 100/2/5,00-V GN	70	10041.1	PK 100/9/10,00-H GN	80	10091.1	PK 114/5/7,50-V GN	77
10001.4	PK 100/2/5,00-V DG	70	10042.1	PK 100/10/10,00-H GN	80	10091.4	PK 114/5/7,50-V DG	77
10002.1	PK 100/3/5,00-V GN	70	10043.1	PK 100/11/10,00-H GN	80	10092.1	PK 114/6/7,50-V GN	77
10002.4	PK 100/3/5,00-V DG	70	10044.1	PK 100/12/10,00-H GN	80	10092.4	PK 114/6/7,50-V DG	77
10003.1	PK 100/4/5,00-V GN	70	10045.1	PK 100/2/5,00-V-BL GN	71	10093.1	PK 114/7/7,50-V GN	77
10003.4	PK 100/4/5,00-V DG	70	10045.4	PK 100/2/5,00-V-BL DG	71	10093.4	PK 114/7/7,50-V DG	77
10004.1	PK 100/5/5,00-V GN	70	10046.1	PK 100/3/5,00-V-BL GN	71	10094.1	PK 114/8/7,50-V GN	77
10004.4	PK 100/5/5,00-V DG	70	10046.4	PK 100/3/5,00-V-BL DG	71	10094.4	PK 114/8/7,50-V DG	77
10005.1	PK 100/6/5,00-V GN	70	10047.1	PK 100/4/5,00-V-BL GN	71	10095.1	PK 114/9/7,50-V GN	77
10005.4	PK 100/6/5,00-V DG	70	10047.4	PK 100/4/5,00-V-BL DG	71	10095.4	PK 114/9/7,50-V DG	77
10006.1	PK 100/7/5,00-V GN	70	10048.1	PK 100/5/5,00-V-BL GN	71	10096.1	PK 114/10/7,50-V GN	77
10006.4	PK 100/7/5,00-V DG	70	10048.4	PK 100/5/5,00-V-BL DG	71	10096.4	PK 114/10/7,50-V DG	77
10007.1	PK 100/8/5,00-V GN	70	10049.1	PK 100/6/5,00-V-BL GN	71	10097.1	PK 114/11/7,50-V GN	77
10007.4	PK 100/8/5,00-V DG	70	10049.4	PK 100/6/5,00-V-BL DG	71	10097.4	PK 114/11/7,50-V DG	77
10008.1	PK 100/9/5,00-V GN	70	10050.1	PK 100/7/5,00-V-BL GN	71	10098.1	PK 114/12/7,50-V GN	77
10008.4	PK 100/9/5,00-V DG	70	10050.4	PK 100/7/5,00-V-BL DG	71	10098.4	PK 114/12/7,50-V DG	77
10009.1	PK 100/10/5,00-V GN	70	10051.1	PK 100/8/5,00-V-BL GN	71	10099.1	PK 110/2/7,50-V GN	76
10009.4	PK 100/10/5,00-V DG	70	10051.4	PK 100/8/5,00-V-BL DG	71	10099.4	PK 110/2/7,50-V DG	76
10010.1	PK 100/11/5,00-V GN	70	10052.1	PK 100/9/5,00-V-BL GN	71	10100.1	PK 110/3/7,50-V GN	76
			10052.4	PK 100/9/5,00-V-BL DG	71	10100.4	PK 110/3/7,50-V DG	76
			10053.1	PK 100/10/5,00-V-BL GN	71	10101.1	PK 110/4/7,50-V GN	76
			10053.4	PK 100/10/5,00-V-BL DG	71	10101.4	PK 110/4/7,50-V DG	76

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
10102.1	PK 110/5/7,50-V GN	76	10140.1	PK 120/10/5,08-H GN	74	10178.1	PK 500/4/5,08-H GN	73
10102.4	PK 110/5/7,50-V DG	76	10140.4	PK 120/10/5,08-H DG	74	10178.4	PK 500/4/5,08-H DG	73
10103.1	PK 110/6/7,50-V GN	76	10141.1	PK 120/11/5,08-H GN	74	10179.1	PK 500/5/5,08-H GN	73
10103.4	PK 110/6/7,50-V DG	76	10141.4	PK 120/11/5,08-H DG	74	10179.4	PK 500/5/5,08-H DG	73
10104.1	PK 110/7/7,50-V GN	76	10142.1	PK 120/12/5,08-H GN	74	10180.1	PK 500/6/5,08-H GN	73
10104.4	PK 110/7/7,50-V DG	76	10142.4	PK 120/12/5,08-H DG	74	10180.4	PK 500/6/5,08-H DG	73
10105.1	PK 110/8/7,50-V GN	76	10143.1	PK 500/2/5,00-V GN	67	10181.1	PK 500/7/5,08-H GN	73
10105.4	PK 110/8/7,50-V DG	76	10143.4	PK 500/2/5,00-V DG	67	10181.4	PK 500/7/5,08-H DG	73
10106.1	PK 110/9/7,50-V GN	76	10144.1	PK 500/3/5,00-V GN	67	10182.1	PK 500/8/5,08-H GN	73
10106.4	PK 110/9/7,50-V DG	76	10144.4	PK 500/3/5,00-V DG	67	10182.4	PK 500/8/5,08-H DG	73
10107.1	PK 110/10/7,50-V GN	76	10145.1	PK 500/4/5,00-V GN	67	10183.1	PK 500/9/5,08-H GN	73
10107.4	PK 110/10/7,50-V DG	76	10145.4	PK 500/4/5,00-V DG	67	10183.4	PK 500/9/5,08-H DG	73
10108.1	PK 110/11/7,50-V GN	76	10146.1	PK 500/5/5,00-V GN	67	10184.1	PK 500/10/5,08-H GN	73
10108.4	PK 110/11/7,50-V DG	76	10146.4	PK 500/5/5,00-V DG	67	10184.4	PK 500/10/5,08-H DG	73
10109.1	PK 110/12/7,50-V GN	76	10147.1	PK 500/6/5,00-V GN	67	10185.1	PK 500/11/5,08-H GN	73
10109.4	PK 110/12/7,50-V DG	76	10147.4	PK 500/6/5,00-V DG	67	10185.4	PK 500/11/5,08-H DG	73
10110.1	PK 110/2/7,50-H GN	76	10148.1	PK 500/7/5,00-V GN	67	10186.1	PK 500/12/5,08-H GN	73
10110.4	PK 110/2/7,50-H DG	76	10148.4	PK 500/7/5,00-V DG	67	10186.4	PK 500/12/5,08-H DG	73
10111.1	PK 110/3/7,50-H GN	76	10149.1	PK 500/8/5,00-V GN	67	10187.1	PK 500/2/10,00-V GN	78
10111.4	PK 110/3/7,50-H DG	76	10149.4	PK 500/8/5,00-V DG	67	10187.4	PK 500/2/10,00-V DG	78
10112.1	PK 110/4/7,50-H GN	76	10150.1	PK 500/9/5,00-V GN	67	10188.1	PK 500/3/10,00-V GN	78
10112.4	PK 110/4/7,50-H DG	76	10150.4	PK 500/9/5,00-V DG	67	10188.4	PK 500/3/10,00-V DG	78
10113.1	PK 110/5/7,50-H GN	76	10151.1	PK 500/10/5,00-V GN	67	10189.1	PK 500/4/10,00-V GN	78
10113.4	PK 110/5/7,50-H DG	76	10151.4	PK 500/10/5,00-V DG	67	10189.4	PK 500/4/10,00-V DG	78
10114.1	PK 110/6/7,50-H GN	76	10152.1	PK 500/11/5,00-V GN	67	10190.1	PK 500/5/10,00-V GN	78
10114.4	PK 110/6/7,50-H DG	76	10152.4	PK 500/11/5,00-V DG	67	10190.4	PK 500/5/10,00-V DG	78
10115.1	PK 110/7/7,50-H GN	76	10153.1	PK 500/12/5,00-V GN	67	10191.1	PK 500/6/10,00-V GN	78
10115.4	PK 110/7/7,50-H DG	76	10153.4	PK 500/12/5,00-V DG	67	10191.4	PK 500/6/10,00-V DG	78
10116.1	PK 110/8/7,50-H GN	76	10154.1	PK 500/2/5,08-V GN	73	10192.1	PK 500/7/10,00-V GN	78
10116.4	PK 110/8/7,50-H DG	76	10154.4	PK 500/2/5,08-V DG	73	10192.4	PK 500/7/10,00-V DG	78
10117.1	PK 110/9/7,50-H GN	76	10155.1	PK 500/3/5,08-V GN	73	10193.1	PK 500/8/10,00-V GN	78
10117.4	PK 110/9/7,50-H DG	76	10155.4	PK 500/3/5,08-V DG	73	10193.4	PK 500/8/10,00-V DG	78
10118.1	PK 110/10/7,50-H GN	76	10156.1	PK 500/4/5,08-V GN	73	10194.1	PK 500/9/10,00-V GN	78
10118.4	PK 110/10/7,50-H DG	76	10156.4	PK 500/4/5,08-V DG	73	10194.4	PK 500/9/10,00-V DG	78
10119.1	PK 110/11/7,50-H GN	76	10157.1	PK 500/5/5,08-V GN	73	10195.1	PK 500/10/10,00-V GN	78
10119.4	PK 110/11/7,50-H DG	76	10157.4	PK 500/5/5,08-V DG	73	10195.4	PK 500/10/10,00-V DG	78
10120.1	PK 110/12/7,50-H GN	76	10158.1	PK 500/6/5,08-V GN	73	10196.1	PK 500/11/10,00-V GN	78
10120.4	PK 110/12/7,50-H DG	76	10158.4	PK 500/6/5,08-V DG	73	10196.4	PK 500/11/10,00-V DG	78
10121.1	PK 120/2/5,08-V GN	74	10159.1	PK 500/7/5,08-V GN	73	10197.1	PK 500/12/10,00-V GN	78
10121.4	PK 120/2/5,08-V DG	74	10159.4	PK 500/7/5,08-V DG	73	10197.4	PK 500/12/10,00-V DG	78
10122.1	PK 120/3/5,08-V GN	74	10160.1	PK 500/8/5,08-V GN	73	10198.1	PK 500/2/10,16-V GN	82
10122.4	PK 120/3/5,08-V DG	74	10160.4	PK 500/8/5,08-V DG	73	10198.4	PK 500/2/10,16-V DG	82
10123.1	PK 120/4/5,08-V GN	74	10161.1	PK 500/9/5,08-V GN	73	10199.1	PK 500/3/10,16-V GN	82
10123.4	PK 120/4/5,08-V DG	74	10161.4	PK 500/9/5,08-V DG	73	10199.4	PK 500/3/10,16-V DG	82
10124.1	PK 120/5/5,08-V GN	74	10162.1	PK 500/10/5,08-V GN	73	10200.1	PK 500/4/10,16-V GN	82
10124.4	PK 120/5/5,08-V DG	74	10162.4	PK 500/10/5,08-V DG	73	10200.4	PK 500/4/10,16-V DG	82
10125.1	PK 120/6/5,08-V GN	74	10163.1	PK 500/11/5,08-V GN	73	10201.1	PK 500/5/10,16-V GN	82
10125.4	PK 120/6/5,08-V DG	74	10163.4	PK 500/11/5,08-V DG	73	10201.4	PK 500/5/10,16-V DG	82
10126.1	PK 120/7/5,08-V GN	74	10164.1	PK 500/12/5,08-V GN	73	10202.1	PK 500/6/10,16-V GN	82
10126.4	PK 120/7/5,08-V DG	74	10164.4	PK 500/12/5,08-V DG	73	10202.4	PK 500/6/10,16-V DG	82
10127.1	PK 120/8/5,08-V GN	74	10165.1	PK 500/2/5,00-H GN	67	10203.1	PK 500/7/10,16-V GN	82
10127.4	PK 120/8/5,08-V DG	74	10165.4	PK 500/2/5,00-H DG	67	10203.4	PK 500/7/10,16-V DG	82
10128.1	PK 120/9/5,08-V GN	74	10166.1	PK 500/3/5,00-H GN	67	10204.1	PK 500/8/10,16-V GN	82
10128.4	PK 120/9/5,08-V DG	74	10166.4	PK 500/3/5,00-H DG	67	10204.4	PK 500/8/10,16-V DG	82
10129.1	PK 120/10/5,08-V GN	74	10167.1	PK 500/4/5,00-H GN	67	10205.1	PK 500/9/10,16-V GN	82
10129.4	PK 120/10/5,08-V DG	74	10167.4	PK 500/4/5,00-H DG	67	10205.4	PK 500/9/10,16-V DG	82
10130.1	PK 120/11/5,08-V GN	74	10168.1	PK 500/5/5,00-H GN	67	10206.1	PK 500/10/10,16-V GN	82
10130.4	PK 120/11/5,08-V DG	74	10168.4	PK 500/5/5,00-H DG	67	10206.4	PK 500/10/10,16-V DG	82
10131.1	PK 120/12/5,08-V GN	74	10169.1	PK 500/6/5,00-H GN	67	10207.1	PK 500/11/10,16-V GN	82
10131.4	PK 120/12/5,08-V DG	74	10169.4	PK 500/6/5,00-H DG	67	10207.4	PK 500/11/10,16-V DG	82
10132.1	PK 120/2/5,08-H GN	74	10170.1	PK 500/7/5,00-H GN	67	10208.1	PK 500/12/10,16-V GN	82
10132.4	PK 120/2/5,08-H DG	74	10170.4	PK 500/7/5,00-H DG	67	10208.4	PK 500/12/10,16-V DG	82
10133.1	PK 120/3/5,08-H GN	74	10171.1	PK 500/8/5,00-H GN	67	10209.1	PK 500/2/10,00-H GN	78
10133.4	PK 120/3/5,08-H DG	74	10171.4	PK 500/8/5,00-H DG	67	10209.4	PK 500/2/10,00-H DG	78
10134.1	PK 120/4/5,08-H GN	74	10172.1	PK 500/9/5,00-H GN	67	10210.1	PK 500/3/10,00-H GN	78
10134.4	PK 120/4/5,08-H DG	74	10172.4	PK 500/9/5,00-H DG	67	10210.4	PK 500/3/10,00-H DG	78
10135.1	PK 120/5/5,08-H GN	74	10173.1	PK 500/10/5,00-H GN	67	10211.1	PK 500/4/10,00-H GN	78
10135.4	PK 120/5/5,08-H DG	74	10173.4	PK 500/10/5,00-H DG	67	10211.4	PK 500/4/10,00-H DG	78
10136.1	PK 120/6/5,08-H GN	74	10174.1	PK 500/11/5,00-H GN	67	10212.1	PK 500/5/10,00-H GN	78
10136.4	PK 120/6/5,08-H DG	74	10174.4	PK 500/11/5,00-H DG	67	10212.4	PK 500/5/10,00-H DG	78
10137.1	PK 120/7/5,08-H GN	74	10175.1	PK 500/12/5,00-H GN	67	10213.1	PK 500/6/10,00-H GN	78
10137.4	PK 120/7/5,08-H DG	74	10175.4	PK 500/12/5,00-H DG	67	10213.4	PK 500/6/10,00-H DG	78
10138.1	PK 120/8/5,08-H GN	74	10176.1	PK 500/2/5,08-H GN	73	10214.1	PK 500/7/10,00-H GN	78
10138.4	PK 120/8/5,08-H DG	74	10176.4	PK 500/2/5,08-H DG	73	10214.4	PK 500/7/10,00-H DG	78
10139.1	PK 120/9/5,08-H GN	74	10177.1	PK 500/3/5,08-H GN	73	10215.1	PK 500/8/10,00-H GN	78
10139.4	PK 120/9/5,08-H DG	74	10177.4	PK 500/3/5,08-H DG	73	10215.4	PK 500/8/10,00-H DG	78

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
10216.1	PK 500/9/10,00-H GN	78	10254.1	PK 550/9/3,50-V GN	66	10292.1	PK 250/3/5,08-V GN	48
10216.4	PK 500/9/10,00-H DG	78	10254.4	PK 550/9/3,50-V DG	66	10292.4	PK 250/3/5,08-V DG	48
10217.1	PK 500/10/10,00-H GN	78	10255.1	PK 550/10/3,50-V GN	66	10293.1	PK 250/4/5,08-V GN	48
10217.4	PK 500/10/10,00-H DG	78	10255.4	PK 550/10/3,50-V DG	66	10293.4	PK 250/4/5,08-V DG	48
10218.1	PK 500/11/10,00-H GN	78	10256.1	PK 550/11/3,50-V GN	66	10294.1	PK 250/5/5,08-V GN	48
10218.4	PK 500/11/10,00-H DG	78	10256.4	PK 550/11/3,50-V DG	66	10294.4	PK 250/5/5,08-V DG	48
10219.1	PK 500/12/10,00-H GN	78	10257.1	PK 550/12/3,50-V GN	66	10295.1	PK 250/6/5,08-V GN	48
10219.4	PK 500/12/10,00-H DG	78	10257.4	PK 550/12/3,50-V DG	66	10295.4	PK 250/6/5,08-V DG	48
10220.1	PK 500/2/10,16-H GN	82	10258.1	PK 550/13/3,50-V GN	66	10296.1	PK 250/7/5,08-V GN	48
10220.4	PK 500/2/10,16-H DG	82	10258.4	PK 550/13/3,50-V DG	66	10296.4	PK 250/7/5,08-V DG	48
10221.1	PK 500/3/10,16-H GN	82	10259.1	PK 550/14/3,50-V GN	66	10297.1	PK 250/8/5,08-V GN	48
10221.4	PK 500/3/10,16-H DG	82	10259.4	PK 550/14/3,50-V DG	66	10297.4	PK 250/8/5,08-V DG	48
10222.1	PK 500/4/10,16-H GN	82	10260.1	PK 550/15/3,50-V GN	66	10298.1	PK 250/9/5,08-V GN	48
10222.4	PK 500/4/10,16-H DG	82	10260.4	PK 550/15/3,50-V DG	66	10298.4	PK 250/9/5,08-V DG	48
10223.1	PK 500/5/10,16-H GN	82	10261.1	PK 550/16/3,50-V GN	66	10299.1	PK 250/10/5,08-V GN	48
10223.4	PK 500/5/10,16-H DG	82	10261.4	PK 550/16/3,50-V DG	66	10299.4	PK 250/10/5,08-V DG	48
10224.1	PK 500/6/10,16-H GN	82	10262.1	PK 550/2/3,50-H GN	66	10300.1	PK 250/11/5,08-V GN	48
10224.4	PK 500/6/10,16-H DG	82	10262.4	PK 550/2/3,50-H DG	66	10300.4	PK 250/11/5,08-V DG	48
10225.1	PK 500/7/10,16-H GN	82	10263.1	PK 550/3/3,50-H GN	66	10301.1	PK 250/12/5,08-V GN	48
10225.4	PK 500/7/10,16-H DG	82	10263.4	PK 550/3/3,50-H DG	66	10301.4	PK 250/12/5,08-V DG	48
10226.1	PK 500/8/10,16-H GN	82	10264.1	PK 550/4/3,50-H GN	66	10302.1	PK 250/2/10,16-V GN	59
10226.4	PK 500/8/10,16-H DG	82	10264.4	PK 550/4/3,50-H DG	66	10303.1	PK 250/3/10,16-V GN	59
10227.1	PK 500/9/10,16-H GN	82	10265.1	PK 550/5/3,50-H GN	66	10304.1	PK 250/4/10,16-V GN	59
10227.4	PK 500/9/10,16-H DG	82	10265.4	PK 550/5/3,50-H DG	66	10305.1	PK 250/5/10,16-V GN	59
10228.1	PK 500/10/10,16-H GN	82	10266.1	PK 550/6/3,50-H GN	66	10306.1	PK 250/6/10,16-V GN	59
10228.4	PK 500/10/10,16-H DG	82	10266.4	PK 550/6/3,50-H DG	66	10307.1	PK 250/7/10,16-V GN	59
10229.1	PK 500/11/10,16-H GN	82	10267.1	PK 550/7/3,50-H GN	66	10308.1	PK 250/8/10,16-V GN	59
10229.4	PK 500/11/10,16-H DG	82	10267.4	PK 550/7/3,50-H DG	66	10309.1	PK 250/9/10,16-V GN	59
10230.1	PK 500/12/10,16-H GN	82	10268.1	PK 550/8/3,50-H GN	66	10310.1	PK 250/10/10,16-V GN	59
10230.4	PK 500/12/10,16-H DG	82	10268.4	PK 550/8/3,50-H DG	66	10311.1	PK 250/11/10,16-V GN	59
10231.1	PK 500/2/5,00-V-BL GN	68	10269.1	PK 550/9/3,50-H GN	66	10312.1	PK 250/12/10,16-V GN	59
10231.4	PK 500/2/5,00-V-BL DG	68	10269.4	PK 550/9/3,50-H DG	66	10313.1	PK 300/2/5,00 GN	41
10232.1	PK 500/3/5,00-V-BL GN	68	10270.1	PK 550/10/3,50-H GN	66	10313.4	PK 300/2/5,00 DG	41
10232.4	PK 500/3/5,00-V-BL DG	68	10270.4	PK 550/10/3,50-H DG	66	10314.1	PK 300/3/5,00 GN	41
10233.1	PK 500/4/5,00-V-BL GN	68	10271.1	PK 550/11/3,50-H GN	66	10314.4	PK 300/3/5,00 DG	41
10233.4	PK 500/4/5,00-V-BL DG	68	10271.4	PK 550/11/3,50-H DG	66	10315.1	PK 300/4/5,00 GN	41
10234.1	PK 500/5/5,00-V-BL GN	68	10272.1	PK 550/12/3,50-H GN	66	10315.4	PK 300/4/5,00 DG	41
10234.4	PK 500/5/5,00-V-BL DG	68	10272.4	PK 550/12/3,50-H DG	66	10316.1	PK 300/5/5,00 GN	41
10235.1	PK 500/6/5,00-V-BL GN	68	10273.1	PK 550/13/3,50-H GN	66	10316.4	PK 300/5/5,00 DG	41
10235.4	PK 500/6/5,00-V-BL DG	68	10273.4	PK 550/13/3,50-H DG	66	10317.1	PK 300/6/5,00 GN	41
10236.1	PK 500/7/5,00-V-BL GN	68	10274.1	PK 550/14/3,50-H GN	66	10317.4	PK 300/6/5,00 DG	41
10236.4	PK 500/7/5,00-V-BL DG	68	10274.4	PK 550/14/3,50-H DG	66	10318.1	PK 300/7/5,00 GN	41
10237.1	PK 500/8/5,00-V-BL GN	68	10275.1	PK 550/15/3,50-H GN	66	10318.4	PK 300/7/5,00 DG	41
10237.4	PK 500/8/5,00-V-BL DG	68	10275.4	PK 550/15/3,50-H DG	66	10319.1	PK 300/8/5,00 GN	41
10238.1	PK 500/9/5,00-V-BL GN	68	10276.1	PK 550/16/3,50-H GN	66	10319.4	PK 300/8/5,00 DG	41
10238.4	PK 500/9/5,00-V-BL DG	68	10276.4	PK 550/16/3,50-H DG	66	10320.1	PK 300/9/5,00 GN	41
10239.1	PK 500/10/5,00-V-BL GN	68	10277.1	PK 550/2/7,00-V GN	75	10320.4	PK 300/9/5,00 DG	41
10239.4	PK 500/10/5,00-V-BL DG	68	10277.4	PK 550/2/7,00-V DG	75	10321.1	PK 300/10/5,00 GN	41
10240.1	PK 500/11/5,00-V-BL GN	68	10278.1	PK 550/3/7,00-V GN	75	10321.4	PK 300/10/5,00 DG	41
10240.4	PK 500/11/5,00-V-BL DG	68	10278.4	PK 550/3/7,00-V DG	75	10322.1	PK 300/11/5,00 GN	41
10241.1	PK 500/12/5,00-V-BL GN	68	10279.1	PK 550/4/7,00-V GN	75	10322.4	PK 300/11/5,00 DG	41
10241.4	PK 500/12/5,00-V-BL DG	68	10279.4	PK 550/4/7,00-V DG	75	10323.1	PK 300/12/5,00 GN	41
10242.1	PK 500/2/10,00-V-BL GN	79	10280.1	PK 550/5/7,00-V GN	75	10323.4	PK 300/12/5,00 DG	41
10242.4	PK 500/2/10,00-V-BL DG	79	10280.4	PK 550/5/7,00-V DG	75	10324.1	PK 300/2/5,08 GN	48
10243.1	PK 500/3/10,00-V-BL GN	79	10281.1	PK 550/6/7,00-V GN	75	10324.4	PK 300/2/5,08 DG	48
10243.4	PK 500/3/10,00-V-BL DG	79	10281.4	PK 550/6/7,00-V DG	75	10325.1	PK 300/3/5,08 GN	48
10244.1	PK 500/4/10,00-V-BL GN	79	10282.1	PK 550/7/7,00-V GN	75	10325.4	PK 300/3/5,08 DG	48
10244.4	PK 500/4/10,00-V-BL DG	79	10282.4	PK 550/7/7,00-V DG	75	10326.1	PK 300/4/5,08 GN	48
10245.1	PK 500/5/10,00-V-BL GN	79	10283.1	PK 550/8/7,00-V GN	75	10326.4	PK 300/4/5,08 DG	48
10245.4	PK 500/5/10,00-V-BL DG	79	10283.4	PK 550/8/7,00-V DG	75	10327.1	PK 300/5/5,08 GN	48
10246.1	PK 500/6/10,00-V-BL GN	79	10284.1	PK 550/2/7,00-H GN	75	10327.4	PK 300/5/5,08 DG	48
10246.4	PK 500/6/10,00-V-BL DG	79	10284.4	PK 550/2/7,00-H DG	75	10328.1	PK 300/6/5,08 GN	48
10247.1	PK 550/2/3,50-V GN	66	10285.1	PK 550/3/7,00-H GN	75	10328.4	PK 300/6/5,08 DG	48
10247.4	PK 550/2/3,50-V DG	66	10285.4	PK 550/3/7,00-H DG	75	10329.1	PK 300/7/5,08 GN	48
10248.1	PK 550/3/3,50-V GN	66	10286.1	PK 550/4/7,00-H GN	75	10329.4	PK 300/7/5,08 DG	48
10248.4	PK 550/3/3,50-V DG	66	10286.4	PK 550/4/7,00-H DG	75	10330.1	PK 300/8/5,08 GN	48
10249.1	PK 550/4/3,50-V GN	66	10287.1	PK 550/5/7,00-H GN	75	10330.4	PK 300/8/5,08 DG	48
10249.4	PK 550/4/3,50-V DG	66	10287.4	PK 550/5/7,00-H DG	75	10331.1	PK 300/9/5,08 GN	48
10250.1	PK 550/5/3,50-V GN	66	10288.1	PK 550/6/7,00-H GN	75	10331.4	PK 300/9/5,08 DG	48
10250.4	PK 550/5/3,50-V DG	66	10288.4	PK 550/6/7,00-H DG	75	10332.1	PK 300/10/5,08 GN	48
10251.1	PK 550/6/3,50-V GN	66	10289.1	PK 550/7/7,00-H GN	75	10332.4	PK 300/10/5,08 DG	48
10251.4	PK 550/6/3,50-V DG	66	10289.4	PK 550/7/7,00-H DG	75	10333.1	PK 300/11/5,08 GN	48
10252.1	PK 550/7/3,50-V GN	66	10290.1	PK 550/8/7,00-H GN	75	10333.4	PK 300/11/5,08 DG	48
10252.4	PK 550/7/3,50-V DG	66	10290.4	PK 550/8/7,00-H DG	75	10334.1	PK 300/12/5,08 GN	48
10253.1	PK 550/8/3,50-V GN	66	10291.1	PK 250/2/5,08-V GN	48	10334.4	PK 300/12/5,08 DG	48
10253.4	PK 550/8/3,50-V DG	66	10291.4	PK 250/2/5,08-V DG	48	10335.1	PK 300/2/10,00 GN	58

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
10335.4	PK 300/2/10,00 DG	58	10390.1	PK 350/2/10,16-V GN	59	10433.4	PK 700/12/5,00-V DG	43
10336.1	PK 300/3/10,00 GN	58	10391.1	PK 350/3/10,16-V GN	59	10434.1	PK 700/2/5,08-V GN	50
10336.4	PK 300/3/10,00 DG	58	10392.1	PK 350/4/10,16-V GN	59	10434.4	PK 700/2/5,08-V DG	50
10337.1	PK 300/4/10,00 GN	58	10393.1	PK 350/5/10,16-V GN	59	10435.1	PK 700/3/5,08-V GN	50
10337.4	PK 300/4/10,00 DG	58	10394.1	PK 350/6/10,16-V GN	59	10435.4	PK 700/3/5,08-V DG	50
10338.1	PK 300/5/10,00 GN	58	10395.1	PK 350/7/10,16-V GN	59	10436.1	PK 700/4/5,08-V GN	50
10338.4	PK 300/5/10,00 DG	58	10396.1	PK 350/8/10,16-V GN	59	10436.4	PK 700/4/5,08-V DG	50
10339.1	PK 300/6/10,00 GN	58	10397.1	PK 350/9/10,16-V GN	59	10437.1	PK 700/5/5,08-V GN	50
10339.4	PK 300/6/10,00 DG	58	10398.1	PK 350/10/10,16-V GN	59	10437.4	PK 700/5/5,08-V DG	50
10340.1	PK 300/7/10,00 GN	58	10399.1	PK 350/11/10,16-V GN	59	10438.1	PK 700/6/5,08-V GN	50
10340.4	PK 300/7/10,00 DG	58	10400.1	PK 350/12/10,16-V GN	59	10438.4	PK 700/6/5,08-V DG	50
10341.1	PK 300/8/10,00 GN	58	10401.1	PK 360/2/7,50-V GN	54	10439.1	PK 700/7/5,08-V GN	50
10341.4	PK 300/8/10,00 DG	58	10401.4	PK 360/2/7,50-V DG	54	10439.4	PK 700/7/5,08-V DG	50
10342.1	PK 300/9/10,00 GN	58	10402.1	PK 360/3/7,50-V GN	54	10440.1	PK 700/8/5,08-V GN	50
10342.4	PK 300/9/10,00 DG	58	10402.4	PK 360/3/7,50-V DG	54	10440.4	PK 700/8/5,08-V DG	50
10343.1	PK 300/10/10,00 GN	58	10403.1	PK 360/4/7,50-V GN	54	10441.1	PK 700/9/5,08-V GN	50
10343.4	PK 300/10/10,00 DG	58	10403.4	PK 360/4/7,50-V DG	54	10441.4	PK 700/9/5,08-V DG	50
10344.1	PK 300/11/10,00 GN	58	10404.1	PK 360/5/7,50-V GN	54	10442.1	PK 700/10/5,08-V GN	50
10344.4	PK 300/11/10,00 DG	58	10404.4	PK 360/5/7,50-V DG	54	10442.4	PK 700/10/5,08-V DG	50
10345.1	PK 300/12/10,00 GN	58	10405.1	PK 360/6/7,50-V GN	54	10443.1	PK 700/11/5,08-V GN	50
10345.4	PK 300/12/10,00 DG	58	10405.4	PK 360/6/7,50-V DG	54	10443.4	PK 700/11/5,08-V DG	50
10346.1	PK 300/2/10,16 GN	60	10406.1	PK 360/7/7,50-V GN	54	10444.1	PK 700/12/5,08-V GN	50
10346.4	PK 300/2/10,16 DG	60	10406.4	PK 360/7/7,50-V DG	54	10444.4	PK 700/12/5,08-V DG	50
10347.1	PK 300/3/10,16 GN	60	10407.1	PK 360/8/7,50-V GN	54	10445.1	PK 700/2/5,00-H GN	43
10347.4	PK 300/3/10,16 DG	60	10407.4	PK 360/8/7,50-V DG	54	10445.4	PK 700/2/5,00-H DG	43
10348.1	PK 300/4/10,16 GN	60	10408.1	PK 360/9/7,50-V GN	54	10446.1	PK 700/3/5,00-H GN	43
10348.4	PK 300/4/10,16 DG	60	10408.4	PK 360/9/7,50-V DG	54	10446.4	PK 700/3/5,00-H DG	43
10349.1	PK 300/5/10,16 GN	60	10409.1	PK 360/10/7,50-V GN	54	10447.1	PK 700/4/5,00-H GN	43
10349.4	PK 300/5/10,16 DG	60	10409.4	PK 360/10/7,50-V DG	54	10447.4	PK 700/4/5,00-H DG	43
10350.1	PK 300/6/10,16 GN	60	10410.1	PK 360/11/7,50-V GN	54	10448.1	PK 700/5/5,00-H GN	43
10350.4	PK 300/6/10,16 DG	60	10410.4	PK 360/11/7,50-V DG	54	10448.4	PK 700/5/5,00-H DG	43
10351.1	PK 300/7/10,16 GN	60	10411.1	PK 360/12/7,50-V GN	54	10449.1	PK 700/6/5,00-H GN	43
10351.4	PK 300/7/10,16 DG	60	10411.4	PK 360/12/7,50-V DG	54	10449.4	PK 700/6/5,00-H DG	43
10352.1	PK 300/8/10,16 GN	60	10412.1	PKD 370/2/5,00-V GN	45	10450.1	PK 700/7/5,00-H GN	43
10352.4	PK 300/8/10,16 DG	60	10412.4	PKD 370/2/5,00-V DG	45	10450.4	PK 700/7/5,00-H DG	43
10353.1	PK 300/9/10,16 GN	60	10413.1	PKD 370/3/5,00-V GN	45	10451.1	PK 700/8/5,00-H GN	43
10353.4	PK 300/9/10,16 DG	60	10413.4	PKD 370/3/5,00-V DG	45	10451.4	PK 700/8/5,00-H DG	43
10354.1	PK 300/10/10,16 GN	60	10414.1	PKD 370/4/5,00-V GN	45	10452.1	PK 700/9/5,00-H GN	43
10354.4	PK 300/10/10,16 DG	60	10414.4	PKD 370/4/5,00-V DG	45	10452.4	PK 700/9/5,00-H DG	43
10355.1	PK 300/11/10,16 GN	60	10415.1	PKD 370/5/5,00-V GN	45	10453.1	PK 700/10/5,00-H GN	43
10355.4	PK 300/11/10,16 DG	60	10415.4	PKD 370/5/5,00-V DG	45	10453.4	PK 700/10/5,00-H DG	43
10356.1	PK 300/12/10,16 GN	60	10416.1	PKD 370/6/5,00-V GN	45	10454.1	PK 700/11/5,00-H GN	43
10356.4	PK 300/12/10,16 DG	60	10416.4	PKD 370/6/5,00-V DG	45	10454.4	PK 700/11/5,00-H DG	43
10357.1	PK 350/2/5,00-V GN	42	10417.1	PKD 370/7/5,00-V GN	45	10455.1	PK 700/12/5,00-H GN	43
10358.1	PK 350/3/5,00-V GN	42	10417.4	PKD 370/7/5,00-V DG	45	10455.4	PK 700/12/5,00-H DG	43
10359.1	PK 350/4/5,00-V GN	42	10418.1	PKD 370/8/5,00-V GN	45	10456.1	PK 700/2/5,08-H GN	50
10360.1	PK 350/5/5,00-V GN	42	10418.4	PKD 370/8/5,00-V DG	45	10456.4	PK 700/2/5,08-H DG	50
10361.1	PK 350/6/5,00-V GN	42	10419.1	PKD 370/9/5,00-V GN	45	10457.1	PK 700/3/5,08-H GN	50
10362.1	PK 350/7/5,00-V GN	42	10419.4	PKD 370/9/5,00-V DG	45	10457.4	PK 700/3/5,08-H DG	50
10363.1	PK 350/8/5,00-V GN	42	10420.1	PKD 370/10/5,00-V GN	45	10458.1	PK 700/4/5,08-H GN	50
10364.1	PK 350/9/5,00-V GN	42	10420.4	PKD 370/10/5,00-V DG	45	10458.4	PK 700/4/5,08-H DG	50
10365.1	PK 350/10/5,00-V GN	42	10421.1	PKD 370/11/5,00-V GN	45	10459.1	PK 700/5/5,08-H GN	50
10366.1	PK 350/11/5,00-V GN	42	10421.4	PKD 370/11/5,00-V DG	45	10459.4	PK 700/5/5,08-H DG	50
10367.1	PK 350/12/5,00-V GN	42	10422.1	PKD 370/12/5,00-V GN	45	10460.1	PK 700/6/5,08-H GN	50
10368.1	PK 350/2/5,08-V GN	49	10422.4	PKD 370/12/5,00-V DG	45	10460.4	PK 700/6/5,08-H DG	50
10369.1	PK 350/3/5,08-V GN	49	10423.1	PK 700/2/5,00-V GN	43	10461.1	PK 700/7/5,08-H GN	50
10370.1	PK 350/4/5,08-V GN	49	10423.4	PK 700/2/5,00-V DG	43	10461.4	PK 700/7/5,08-H DG	50
10371.1	PK 350/5/5,08-V GN	49	10424.1	PK 700/3/5,00-V GN	43	10462.1	PK 700/8/5,08-H GN	50
10372.1	PK 350/6/5,08-V GN	49	10424.4	PK 700/3/5,00-V DG	43	10462.4	PK 700/8/5,08-H DG	50
10373.1	PK 350/7/5,08-V GN	49	10425.1	PK 700/4/5,00-V GN	43	10463.1	PK 700/9/5,08-H GN	50
10374.1	PK 350/8/5,08-V GN	49	10425.4	PK 700/4/5,00-V DG	43	10463.4	PK 700/9/5,08-H DG	50
10375.1	PK 350/9/5,08-V GN	49	10426.1	PK 700/5/5,00-V GN	43	10464.1	PK 700/10/5,08-H GN	50
10376.1	PK 350/10/5,08-V GN	49	10426.4	PK 700/5/5,00-V DG	43	10464.4	PK 700/10/5,08-H DG	50
10377.1	PK 350/11/5,08-V GN	49	10427.1	PK 700/6/5,00-V GN	43	10465.1	PK 700/11/5,08-H GN	50
10378.1	PK 350/12/5,08-V GN	49	10427.4	PK 700/6/5,00-V DG	43	10465.4	PK 700/11/5,08-H DG	50
10379.1	PK 350/2/10,00-V GN	58	10428.1	PK 700/7/5,00-V GN	43	10466.1	PK 700/12/5,08-H GN	50
10380.1	PK 350/3/10,00-V GN	58	10428.4	PK 700/7/5,00-V DG	43	10466.4	PK 700/12/5,08-H DG	50
10381.1	PK 350/4/10,00-V GN	58	10429.1	PK 700/8/5,00-V GN	43	10467.1	PK 710/2/7,50-V GN	55
10382.1	PK 350/5/10,00-V GN	58	10429.4	PK 700/8/5,00-V DG	43	10467.4	PK 710/2/7,50-V DG	55
10383.1	PK 350/6/10,00-V GN	58	10430.1	PK 700/9/5,00-V GN	43	10468.1	PK 710/3/7,50-V GN	55
10384.1	PK 350/7/10,00-V GN	58	10430.4	PK 700/9/5,00-V DG	43	10468.4	PK 710/3/7,50-V DG	55
10385.1	PK 350/8/10,00-V GN	58	10431.1	PK 700/10/5,00-V GN	43	10469.1	PK 710/4/7,50-V GN	55
10386.1	PK 350/9/10,00-V GN	58	10431.4	PK 700/10/5,00-V DG	43	10469.4	PK 710/4/7,50-V DG	55
10387.1	PK 350/10/10,00-V GN	58	10432.1	PK 700/11/5,00-V GN	43	10470.1	PK 710/5/7,50-V GN	55
10388.1	PK 350/11/10,00-V GN	58	10432.4	PK 700/11/5,00-V DG	43	10470.4	PK 710/5/7,50-V DG	55
10389.1	PK 350/12/10,00-V GN	58	10433.1	PK 700/12/5,00-V GN	43	10471.1	PK 710/6/7,50-V GN	55

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
10471.4	PK 710/6/7,50-V DG	55	10509.4	PKD 750/11/5,08-V DG	51	10574.1	PKT 2200/6/5,00-H GN	62
10472.1	PK 710/7/7,50-V GN	55	10510.1	PKD 750/12/5,08-V GN	51	10575.1	PKT 2200/7/5,00-H GN	62
10472.4	PK 710/7/7,50-V DG	55	10510.4	PKD 750/12/5,08-V DG	51	10576.1	PKT 2200/8/5,00-H GN	62
10473.1	PK 710/8/7,50-V GN	55	10511.1	PKD 790/2/5,00-V GN	46	10577.1	PKT 2200/9/5,00-H GN	62
10473.4	PK 710/8/7,50-V DG	55	10511.4	PKD 790/2/5,00-V DG	46	10578.1	PKT 2200/10/5,00-H GN	62
10474.1	PK 710/9/7,50-V GN	55	10512.1	PKD 790/4/5,00-V GN	46	10579.1	PKT 2200/11/5,00-H GN	62
10474.4	PK 710/9/7,50-V DG	55	10512.4	PKD 790/4/5,00-V DG	46	10580.1	PKT 2200/12/5,00-H GN	62
10475.1	PK 710/10/7,50-V GN	55	10513.1	PKD 790/6/5,00-V GN	46	10581.1	PKT 2200/13/5,00-H GN	62
10475.4	PK 710/10/7,50-V DG	55	10513.4	PKD 790/6/5,00-V DG	46	10582.1	PKT 2200/14/5,00-H GN	62
10476.1	PK 710/11/7,50-V GN	55	10514.1	PKD 790/8/5,00-V GN	46	10583.1	PKT 2200/15/5,00-H GN	62
10476.4	PK 710/11/7,50-V DG	55	10514.4	PKD 790/8/5,00-V DG	46	10584.1	PKT 2200/16/5,00-H GN	62
10477.1	PK 710/12/7,50-V GN	55	10515.1	PKD 790/10/5,00-V GN	46	10585.1	PKT 2200/17/5,00-H GN	62
10477.4	PK 710/12/7,50-V DG	55	10515.4	PKD 790/10/5,00-V DG	46	10586.1	PKT 2200/18/5,00-H GN	62
10478.1	PK 710/2/7,62-V GN	56	10516.1	PKD 790/12/5,00-V GN	46	10587.1	PKT 2200/19/5,00-H GN	62
10478.4	PK 710/2/7,62-V DG	56	10516.4	PKD 790/12/5,00-V DG	46	10588.1	PKT 2200/20/5,00-H GN	62
10479.1	PK 710/3/7,62-V GN	56	10517.1	PKH 793/2/5,00-V GN	46	10589.1	PKT 2200/21/5,00-H GN	62
10479.4	PK 710/3/7,62-V DG	56	10517.4	PKH 793/2/5,00-V DG	46	10590.1	PKT 2200/22/5,00-H GN	62
10480.1	PK 710/4/7,62-V GN	56	10518.1	PKH 793/4/5,00-V GN	46	10591.1	PKT 2200/23/5,00-H GN	62
10480.4	PK 710/4/7,62-V DG	56	10518.4	PKH 793/4/5,00-V DG	46	10592.1	PKT 2200/24/5,00-H GN	62
10481.1	PK 710/5/7,62-V GN	56	10519.1	PKH 793/6/5,00-V GN	46	10594.1	PKT 2200/2/7,50-V GN	63
10481.4	PK 710/5/7,62-V DG	56	10519.4	PKH 793/6/5,00-V DG	46	10595.1	PKT 2200/3/7,50-V GN	63
10482.1	PK 710/6/7,62-V GN	56	10520.1	PKH 793/8/5,00-V GN	46	10596.1	PKT 2200/4/7,50-V GN	63
10482.4	PK 710/6/7,62-V DG	56	10520.4	PKH 793/8/5,00-V DG	46	10597.1	PKT 2200/5/7,50-V GN	63
10483.1	PK 710/7/7,62-V GN	56	10521.1	PKH 793/10/5,00-V GN	46	10598.1	PKT 2200/6/7,50-V GN	63
10483.4	PK 710/7/7,62-V DG	56	10521.4	PKH 793/10/5,00-V DG	46	10599.1	PKT 2200/7/7,50-V GN	63
10484.1	PK 710/8/7,62-V GN	56	10522.1	PKH 793/12/5,00-V GN	46	10600.1	PKT 2200/8/7,50-V GN	63
10484.4	PK 710/8/7,62-V DG	56	10522.4	PKH 793/12/5,00-V DG	46	10601.1	PKT 2200/9/7,50-V GN	63
10485.1	PK 710/9/7,62-V GN	56	10523.1	PKZ 840/2/6,35-V GN	53	10602.1	PKT 2200/10/7,50-V GN	63
10485.4	PK 710/9/7,62-V DG	56	10524.1	PKZ 840/3/6,35-V GN	53	10603.1	PKT 2200/11/7,50-V GN	63
10486.1	PK 710/10/7,62-V GN	56	10525.1	PKZ 840/4/6,35-V GN	53	10604.1	PKT 2200/12/7,50-V GN	63
10486.4	PK 710/10/7,62-V DG	56	10526.1	PKZ 840/5/6,35-V GN	53	10605.1	PKT 2200/13/7,50-V GN	63
10487.1	PK 710/11/7,62-V GN	56	10527.1	PKZ 840/6/6,35-V GN	53	10606.1	PKT 2200/14/7,50-V GN	63
10487.4	PK 710/11/7,62-V DG	56	10528.1	PKZ 840/7/6,35-V GN	53	10607.1	PKT 2200/15/7,50-V GN	63
10488.1	PK 710/12/7,62-V GN	56	10529.1	PKZ 840/8/6,35-V GN	53	10608.1	PKT 2200/16/7,50-V GN	63
10488.4	PK 710/12/7,62-V DG	56	10530.1	PKZ 840/9/6,35-V GN	53	10609.1	PKT 2200/17/7,50-V GN	63
10489.1	PKD 750/2/5,00-V GN	45	10531.1	PKZ 840/10/6,35-V GN	53	10610.1	PKT 2200/18/7,50-V GN	63
10489.4	PKD 750/2/5,00-V DG	45	10532.1	PKZ 840/11/6,35-V GN	53	10611.1	PKT 2200/19/7,50-V GN	63
10490.1	PKD 750/3/5,00-V GN	45	10533.1	PKZ 840/12/6,35-V GN	53	10612.1	PKT 2200/20/7,50-V GN	63
10490.4	PKD 750/3/5,00-V DG	45	10534.1	PKZ 841/2/9,52-V GN	57	10613.1	PKT 2200/21/7,50-V GN	63
10491.1	PKD 750/4/5,00-V GN	45	10535.1	PKZ 841/3/9,52-V GN	57	10614.1	PKT 2200/22/7,50-V GN	63
10491.4	PKD 750/4/5,00-V DG	45	10536.1	PKZ 841/4/9,52-V GN	57	10615.1	PKT 2200/23/7,50-V GN	63
10492.1	PKD 750/5/5,00-V GN	45	10537.1	PKZ 841/5/9,52-V GN	57	10616.1	PKT 2200/24/7,50-V GN	63
10492.4	PKD 750/5/5,00-V DG	45	10538.1	PKZ 841/6/9,52-V GN	57	10618.1	PKT 2200/2/7,50-H GN	63
10493.1	PKD 750/6/5,00-V GN	45	10539.1	PKZ 841/7/9,52-V GN	57	10619.1	PKT 2200/3/7,50-H GN	63
10493.4	PKD 750/6/5,00-V DG	45	10540.1	PKZ 841/8/9,52-V GN	57	10620.1	PKT 2200/4/7,50-H GN	63
10494.1	PKD 750/7/5,00-V GN	45	10541.1	PKZ 841/9/9,52-V GN	57	10621.1	PKT 2200/5/7,50-H GN	63
10494.4	PKD 750/7/5,00-V DG	45	10542.1	PKZ 841/10/9,52-V GN	57	10622.1	PKT 2200/6/7,50-H GN	63
10495.1	PKD 750/8/5,00-V GN	45	10543.1	PKZ 841/11/9,52-V GN	57	10623.1	PKT 2200/7/7,50-H GN	63
10495.4	PKD 750/8/5,00-V DG	45	10544.1	PKZ 841/12/9,52-V GN	57	10624.1	PKT 2200/8/7,50-H GN	63
10496.1	PKD 750/9/5,00-V GN	45	10546.1	PKT 2200/2/5,00-V GN	62	10625.1	PKT 2200/9/7,50-H GN	63
10496.4	PKD 750/9/5,00-V DG	45	10547.1	PKT 2200/3/5,00-V GN	62	10626.1	PKT 2200/10/7,50-H GN	63
10497.1	PKD 750/10/5,00-V GN	45	10548.1	PKT 2200/4/5,00-V GN	62	10627.1	PKT 2200/11/7,50-H GN	63
10497.4	PKD 750/10/5,00-V DG	45	10549.1	PKT 2200/5/5,00-V GN	62	10628.1	PKT 2200/12/7,50-H GN	63
10498.1	PKD 750/11/5,00-V GN	45	10550.1	PKT 2200/6/5,00-V GN	62	10629.1	PKT 2200/13/7,50-H GN	63
10498.4	PKD 750/11/5,00-V DG	45	10551.1	PKT 2200/7/5,00-V GN	62	10630.1	PKT 2200/14/7,50-H GN	63
10499.1	PKD 750/12/5,00-V GN	45	10552.1	PKT 2200/8/5,00-V GN	62	10631.1	PKT 2200/15/7,50-H GN	63
10499.4	PKD 750/12/5,00-V DG	45	10553.1	PKT 2200/9/5,00-V GN	62	10632.1	PKT 2200/16/7,50-H GN	63
10500.1	PKD 750/2/5,08-V GN	51	10554.1	PKT 2200/10/5,00-V GN	62	10633.1	PKT 2200/17/7,50-H GN	63
10500.4	PKD 750/2/5,08-V DG	51	10555.1	PKT 2200/11/5,00-V GN	62	10634.1	PKT 2200/18/7,50-H GN	63
10501.1	PKD 750/3/5,08-V GN	51	10556.1	PKT 2200/12/5,00-V GN	62	10635.1	PKT 2200/19/7,50-H GN	63
10501.4	PKD 750/3/5,08-V DG	51	10557.1	PKT 2200/13/5,00-V GN	62	10636.1	PKT 2200/20/7,50-H GN	63
10502.1	PKD 750/4/5,08-V GN	51	10558.1	PKT 2200/14/5,00-V GN	62	10637.1	PKT 2200/21/7,50-H GN	63
10502.4	PKD 750/4/5,08-V DG	51	10559.1	PKT 2200/15/5,00-V GN	62	10638.1	PKT 2200/22/7,50-H GN	63
10503.1	PKD 750/5/5,08-V GN	51	10560.1	PKT 2200/16/5,00-V GN	62	10639.1	PKT 2200/23/7,50-H GN	63
10503.4	PKD 750/5/5,08-V DG	51	10561.1	PKT 2200/17/5,00-V GN	62	10640.1	PKT 2200/24/7,50-H GN	63
10504.1	PKD 750/6/5,08-V GN	51	10562.1	PKT 2200/18/5,00-V GN	62	10642.1	PKT 2200/2/10,00-V GN	64
10504.4	PKD 750/6/5,08-V DG	51	10563.1	PKT 2200/19/5,00-V GN	62	10643.1	PKT 2200/3/10,00-V GN	64
10505.1	PKD 750/7/5,08-V GN	51	10564.1	PKT 2200/20/5,00-V GN	62	10644.1	PKT 2200/4/10,00-V GN	64
10505.4	PKD 750/7/5,08-V DG	51	10565.1	PKT 2200/21/5,00-V GN	62	10645.1	PKT 2200/5/10,00-V GN	64
10506.1	PKD 750/8/5,08-V GN	51	10566.1	PKT 2200/22/5,00-V GN	62	10646.1	PKT 2200/6/10,00-V GN	64
10506.4	PKD 750/8/5,08-V DG	51	10567.1	PKT 2200/23/5,00-V GN	62	10647.1	PKT 2200/7/10,00-V GN	64
10507.1	PKD 750/9/5,08-V GN	51	10568.1	PKT 2200/24/5,00-V GN	62	10648.1	PKT 2200/8/10,00-V GN	64
10507.4	PKD 750/9/5,08-V DG	51	10570.1	PKT 2200/2/5,00-H GN	62	10649.1	PKT 2200/9/10,00-V GN	64
10508.1	PKD 750/10/5,08-V GN	51	10571.1	PKT 2200/3/5,00-H GN	62	10650.1	PKT 2200/10/10,00-V GN	64
10508.4	PKD 750/10/5,08-V DG	51	10572.1	PKT 2200/4/5,00-H GN	62	10651.1	PKT 2200/11/10,00-V GN	64
10509.1	PKD 750/11/5,08-V GN	51	10573.1	PKT 2200/5/5,00-H GN	62	10652.1	PKT 2200/12/10,00-V GN	64

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
10653.1	PKT 2200/13/10,00-V GN	64	10710.1	PZK 3000/22/5,00/5,08 GN	27	10793.0	PZK 3001/9/5,00/5,08-KD LG	27
10654.1	PKT 2200/14/10,00-V GN	64	10711.0	PZK 3000/23/5,00/5,08 LG	27	10793.1	PZK 3001/9/5,00/5,08-KD GN	27
10655.1	PKT 2200/15/10,00-V GN	64	10711.1	PZK 3000/23/5,00/5,08 GN	27	10794.0	PZK 3001/10/5,00/5,08-KD LG	27
10656.1	PKT 2200/16/10,00-V GN	64	10712.0	PZK 3000/24/5,00/5,08 LG	27	10794.1	PZK 3001/10/5,00/5,08-KD GN	27
10657.1	PKT 2200/17/10,00-V GN	64	10712.1	PZK 3000/24/5,00/5,08 GN	27	10795.0	PZK 3001/11/5,00/5,08-KD LG	27
10658.1	PKT 2200/18/10,00-V GN	64	10713.1	PK 500/2/5,00-H-BL GN	68	10795.1	PZK 3001/11/5,00/5,08-KD GN	27
10659.1	PKT 2200/19/10,00-V GN	64	10714.1	PK 500/3/5,00-H-BL GN	68	10796.0	PZK 3001/12/5,00/5,08-KD LG	27
10660.1	PKT 2200/20/10,00-V GN	64	10715.1	PK 500/4/5,00-H-BL GN	68	10796.1	PZK 3001/12/5,00/5,08-KD GN	27
10661.1	PKT 2200/21/10,00-V GN	64	10716.1	PK 500/5/5,00-H-BL GN	68	10797.0	PZK 3001/13/5,00/5,08-KD LG	27
10662.1	PKT 2200/22/10,00-V GN	64	10717.1	PK 500/6/5,00-H-BL GN	68	10797.1	PZK 3001/13/5,00/5,08-KD GN	27
10663.1	PKT 2200/23/10,00-V GN	64	10718.1	PK 500/7/5,00-H-BL GN	68	10798.0	PZK 3001/14/5,00/5,08-KD LG	27
10664.1	PKT 2200/24/10,00-V GN	64	10719.1	PK 500/8/5,00-H-BL GN	68	10798.1	PZK 3001/14/5,00/5,08-KD GN	27
10666.1	PKT 2200/2/10,00-H GN	64	10720.1	PK 500/9/5,00-H-BL GN	68	10799.0	PZK 3001/15/5,00/5,08-KD LG	27
10667.1	PKT 2200/3/10,00-H GN	64	10721.1	PK 500/10/5,00-H-BL GN	68	10799.1	PZK 3001/15/5,00/5,08-KD GN	27
10668.1	PKT 2200/4/10,00-H GN	64	10722.1	PK 500/11/5,00-H-BL GN	68	10800.0	PZK 3001/16/5,00/5,08-KD LG	27
10669.1	PKT 2200/5/10,00-H GN	64	10723.1	PK 500/12/5,00-H-BL GN	68	10800.1	PZK 3001/16/5,00/5,08-KD GN	27
10670.1	PKT 2200/6/10,00-H GN	64	10738.0	PZK 3010/2/7,50/7,62 LG	33	10801.0	PZK 3001/17/5,00/5,08-KD LG	27
10671.1	PKT 2200/7/10,00-H GN	64	10738.1	PZK 3010/2/7,50/7,62 GN	33	10801.1	PZK 3001/17/5,00/5,08-KD GN	27
10672.1	PKT 2200/8/10,00-H GN	64	10739.0	PZK 3010/3/7,50/7,62 LG	33	10802.0	PZK 3001/18/5,00/5,08-KD LG	27
10673.1	PKT 2200/9/10,00-H GN	64	10739.1	PZK 3010/3/7,50/7,62 GN	33	10803.0	PZK 3001/19/5,00/5,08-KD LG	27
10674.1	PKT 2200/10/10,00-H GN	64	10740.0	PZK 3010/4/7,50/7,62 LG	33	10804.0	PZK 3001/20/5,00/5,08-KD LG	27
10675.1	PKT 2200/11/10,00-H GN	64	10740.1	PZK 3010/4/7,50/7,62 GN	33	10805.0	PZK 3001/21/5,00/5,08-KD LG	27
10676.1	PKT 2200/12/10,00-H GN	64	10741.0	PZK 3010/5/7,50/7,62 LG	33	10806.0	PZK 3001/22/5,00/5,08-KD LG	27
10677.1	PKT 2200/13/10,00-H GN	64	10741.1	PZK 3010/5/7,50/7,62 GN	33	10807.0	PZK 3001/23/5,00/5,08-KD LG	27
10678.1	PKT 2200/14/10,00-H GN	64	10742.0	PZK 3010/6/7,50/7,62 LG	33	10808.0	PZK 3001/24/5,00/5,08-KD LG	27
10679.1	PKT 2200/15/10,00-H GN	64	10742.1	PZK 3010/6/7,50/7,62 GN	33	10834.0	PZK 3001/2/5,00/5,08-FD LG	28
10680.1	PKT 2200/16/10,00-H GN	64	10743.0	PZK 3010/7/7,50/7,62 LG	33	10834.1	PZK 3001/2/5,00/5,08-FD GN	28
10681.1	PKT 2200/17/10,00-H GN	64	10743.1	PZK 3010/7/7,50/7,62 GN	33	10835.0	PZK 3001/3/5,00/5,08-FD LG	28
10682.1	PKT 2200/18/10,00-H GN	64	10744.0	PZK 3010/8/7,50/7,62 LG	33	10835.1	PZK 3001/3/5,00/5,08-FD GN	28
10683.1	PKT 2200/19/10,00-H GN	64	10744.1	PZK 3010/8/7,50/7,62 GN	33	10836.0	PZK 3001/4/5,00/5,08-FD LG	28
10684.1	PKT 2200/20/10,00-H GN	64	10745.0	PZK 3010/9/7,50/7,62 LG	33	10836.1	PZK 3001/4/5,00/5,08-FD GN	28
10685.1	PKT 2200/21/10,00-H GN	64	10745.1	PZK 3010/9/7,50/7,62 GN	33	10837.0	PZK 3001/5/5,00/5,08-FD LG	28
10686.1	PKT 2200/22/10,00-H GN	64	10746.0	PZK 3010/10/7,50/7,62 LG	33	10837.1	PZK 3001/5/5,00/5,08-FD GN	28
10687.1	PKT 2200/23/10,00-H GN	64	10746.1	PZK 3010/10/7,50/7,62 GN	33	10838.0	PZK 3001/6/5,00/5,08-FD LG	28
10688.1	PKT 2200/24/10,00-H GN	64	10747.0	PZK 3010/11/7,50/7,62 LG	33	10838.1	PZK 3001/6/5,00/5,08-FD GN	28
10690.0	PZK 3000/2/5,00/5,08 LG	27	10747.1	PZK 3010/11/7,50/7,62 GN	33	10839.0	PZK 3001/7/5,00/5,08-FD LG	28
10690.1	PZK 3000/2/5,00/5,08 GN	27	10748.0	PZK 3010/12/7,50/7,62 LG	33	10839.1	PZK 3001/7/5,00/5,08-FD GN	28
10691.0	PZK 3000/3/5,00/5,08 LG	27	10748.1	PZK 3010/12/7,50/7,62 GN	33	10840.0	PZK 3001/8/5,00/5,08-FD LG	28
10691.1	PZK 3000/3/5,00/5,08 GN	27	10749.0	PZK 3010/13/7,50/7,62 LG	33	10840.1	PZK 3001/8/5,00/5,08-FD GN	28
10692.0	PZK 3000/4/5,00/5,08 LG	27	10749.1	PZK 3010/13/7,50/7,62 GN	33	10841.0	PZK 3001/9/5,00/5,08-FD LG	28
10692.1	PZK 3000/4/5,00/5,08 GN	27	10750.0	PZK 3010/14/7,50/7,62 LG	33	10841.1	PZK 3001/9/5,00/5,08-FD GN	28
10693.0	PZK 3000/5/5,00/5,08 LG	27	10750.1	PZK 3010/14/7,50/7,62 GN	33	10842.0	PZK 3001/10/5,00/5,08-FD LG	28
10693.1	PZK 3000/5/5,00/5,08 GN	27	10751.0	PZK 3010/15/7,50/7,62 LG	33	10842.1	PZK 3001/10/5,00/5,08-FD GN	28
10694.0	PZK 3000/6/5,00/5,08 LG	27	10751.1	PZK 3010/15/7,50/7,62 GN	33	10843.0	PZK 3001/11/5,00/5,08-FD LG	28
10694.1	PZK 3000/6/5,00/5,08 GN	27	10752.0	PZK 3010/16/7,50/7,62 LG	33	10843.1	PZK 3001/11/5,00/5,08-FD GN	28
10695.0	PZK 3000/7/5,00/5,08 LG	27	10752.1	PZK 3010/16/7,50/7,62 GN	33	10844.0	PZK 3001/12/5,00/5,08-FD LG	28
10695.1	PZK 3000/7/5,00/5,08 GN	27	10753.0	PZK 3010/17/7,50/7,62 LG	33	10844.1	PZK 3001/12/5,00/5,08-FD GN	28
10696.0	PZK 3000/8/5,00/5,08 LG	27	10753.1	PZK 3010/17/7,50/7,62 GN	33	10845.0	PZK 3001/13/5,00/5,08-FD LG	28
10696.1	PZK 3000/8/5,00/5,08 GN	27	10754.0	PZK 3010/18/7,50/7,62 LG	33	10845.1	PZK 3001/13/5,00/5,08-FD GN	28
10697.0	PZK 3000/9/5,00/5,08 LG	27	10754.1	PZK 3010/18/7,50/7,62 GN	33	10846.0	PZK 3001/14/5,00/5,08-FD LG	28
10697.1	PZK 3000/9/5,00/5,08 GN	27	10755.0	PZK 3010/19/7,50/7,62 LG	33	10846.1	PZK 3001/14/5,00/5,08-FD GN	28
10698.0	PZK 3000/10/5,00/5,08 LG	27	10755.1	PZK 3010/19/7,50/7,62 GN	33	10847.0	PZK 3001/15/5,00/5,08-FD LG	28
10698.1	PZK 3000/10/5,00/5,08 GN	27	10756.0	PZK 3010/20/7,50/7,62 LG	33	10847.1	PZK 3001/15/5,00/5,08-FD GN	28
10699.0	PZK 3000/11/5,00/5,08 LG	27	10756.1	PZK 3010/20/7,50/7,62 GN	33	10848.0	PZK 3001/16/5,00/5,08-FD LG	28
10699.1	PZK 3000/11/5,00/5,08 GN	27	10757.0	PZK 3010/21/7,50/7,62 LG	33	10848.1	PZK 3001/16/5,00/5,08-FD GN	28
10700.0	PZK 3000/12/5,00/5,08 LG	27	10757.1	PZK 3010/21/7,50/7,62 GN	33	10849.0	PZK 3001/17/5,00/5,08-FD LG	28
10700.1	PZK 3000/12/5,00/5,08 GN	27	10758.0	PZK 3010/22/7,50/7,62 LG	33	10849.1	PZK 3001/17/5,00/5,08-FD GN	28
10701.0	PZK 3000/13/5,00/5,08 LG	27	10758.1	PZK 3010/22/7,50/7,62 GN	33	10850.0	PZK 3001/18/5,00/5,08-FD LG	28
10701.1	PZK 3000/13/5,00/5,08 GN	27	10759.0	PZK 3010/23/7,50/7,62 LG	33	10850.1	PZK 3001/18/5,00/5,08-FD GN	28
10702.0	PZK 3000/14/5,00/5,08 LG	27	10759.1	PZK 3010/23/7,50/7,62 GN	33	10851.0	PZK 3001/19/5,00/5,08-FD LG	28
10702.1	PZK 3000/14/5,00/5,08 GN	27	10760.0	PZK 3010/24/7,50/7,62 LG	33	10851.1	PZK 3001/19/5,00/5,08-FD GN	28
10703.0	PZK 3000/15/5,00/5,08 LG	27	10760.1	PZK 3010/24/7,50/7,62 GN	33	10852.0	PZK 3001/20/5,00/5,08-FD LG	28
10703.1	PZK 3000/15/5,00/5,08 GN	27	10786.0	PZK 3001/2/5,00/5,08-KD LG	27	10852.1	PZK 3001/20/5,00/5,08-FD GN	28
10704.0	PZK 3000/16/5,00/5,08 LG	27	10786.1	PZK 3001/2/5,00/5,08-KD GN	27	10853.0	PZK 3001/21/5,00/5,08-FD LG	28
10704.1	PZK 3000/16/5,00/5,08 GN	27	10787.0	PZK 3001/3/5,00/5,08-KD LG	27	10853.1	PZK 3001/21/5,00/5,08-FD GN	28
10705.0	PZK 3000/17/5,00/5,08 LG	27	10787.1	PZK 3001/3/5,00/5,08-KD GN	27	10854.0	PZK 3001/22/5,00/5,08-FD LG	28
10705.1	PZK 3000/17/5,00/5,08 GN	27	10788.0	PZK 3001/4/5,00/5,08-KD LG	27	10854.1	PZK 3001/22/5,00/5,08-FD GN	28
10706.0	PZK 3000/18/5,00/5,08 LG	27	10788.1	PZK 3001/4/5,00/5,08-KD GN	27	10855.0	PZK 3001/23/5,00/5,08-FD LG	28
10706.1	PZK 3000/18/5,00/5,08 GN	27	10789.0	PZK 3001/5/5,00/5,08-KD LG	27	10855.1	PZK 3001/23/5,00/5,08-FD GN	28
10707.0	PZK 3000/19/5,00/5,08 LG	27	10789.1	PZK 3001/5/5,00/5,08-KD GN	27	10856.0	PZK 3001/24/5,00/5,08-FD LG	28
10707.1	PZK 3000/19/5,00/5,08 GN	27	10790.0	PZK 3001/6/5,00/5,08-KD LG	27	10856.1	PZK 3001/24/5,00/5,08-FD GN	28
10708.0	PZK 3000/20/5,00/5,08 LG	27	10790.1	PZK 3001/6/5,00/5,08-KD GN	27	10882.0	PZK 3011/2/7,50/7,62-KD LG	33
10708.1	PZK 3000/20/5,00/5,08 GN	27	10791.0	PZK 3001/7/5,00/5,08-KD LG	27	10882.1	PZK 3011/2/7,50/7,62-KD GN	33
10709.0	PZK 3000/21/5,00/5,08 LG	27	10791.1	PZK 3001/7/5,00/5,08-KD GN	27	10883.0	PZK 3011/3/7,50/7,62-KD LG	33
10709.1	PZK 3000/21/5,00/5,08 GN	27	10792.0	PZK 3001/8/5,00/5,08-KD LG	27	10883.1	PZK 3011/3/7,50/7,62-KD GN	33
10710.0	PZK 3000/22/5,00/5,08 LG	27	10792.1	PZK 3001/8/5,00/5,08-KD GN	27	10884.0	PZK 3011/4/7,50/7,62-KD LG	33

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
10884.1	PZK 3011/4/7,50/7,62-KD GN	33	10947.1	PZK 3011/19/7,50/7,62-FD GN	34	11034.1	PZK 3021/10/10,00/10,16-KD GN	35
10885.0	PZK 3011/5/7,50/7,62-KD LG	33	10948.0	PZK 3011/20/7,50/7,62-FD LG	34	11035.0	PZK 3021/11/10,00/10,16-KD LG	35
10885.1	PZK 3011/5/7,50/7,62-KD GN	33	10948.1	PZK 3011/20/7,50/7,62-FD GN	34	11035.1	PZK 3021/11/10,00/10,16-KD GN	35
10886.0	PZK 3011/6/7,50/7,62-KD LG	33	10949.0	PZK 3011/21/7,50/7,62-FD LG	34	11036.0	PZK 3021/12/10,00/10,16-KD LG	35
10886.1	PZK 3011/6/7,50/7,62-KD GN	33	10949.1	PZK 3011/21/7,50/7,62-FD GN	34	11036.1	PZK 3021/12/10,00/10,16-KD GN	35
10887.0	PZK 3011/7/7,50/7,62-KD LG	33	10950.0	PZK 3011/22/7,50/7,62-FD LG	34	11037.0	PZK 3021/13/10,00/10,16-KD LG	35
10887.1	PZK 3011/7/7,50/7,62-KD GN	33	10950.1	PZK 3011/22/7,50/7,62-FD GN	34	11037.1	PZK 3021/13/10,00/10,16-KD GN	35
10888.0	PZK 3011/8/7,50/7,62-KD LG	33	10951.0	PZK 3011/23/7,50/7,62-FD LG	34	11038.0	PZK 3021/14/10,00/10,16-KD LG	35
10888.1	PZK 3011/8/7,50/7,62-KD GN	33	10951.1	PZK 3011/23/7,50/7,62-FD GN	34	11038.1	PZK 3021/14/10,00/10,16-KD GN	35
10889.0	PZK 3011/9/7,50/7,62-KD LG	33	10952.0	PZK 3011/24/7,50/7,62-FD LG	34	11039.0	PZK 3021/15/10,00/10,16-KD LG	35
10889.1	PZK 3011/9/7,50/7,62-KD GN	33	10952.1	PZK 3011/24/7,50/7,62-FD GN	34	11039.1	PZK 3021/15/10,00/10,16-KD GN	35
10890.0	PZK 3011/10/7,50/7,62-KD LG	33	10978.0	PZK 3020/2/10,00/10,16 LG	35	11040.0	PZK 3021/16/10,00/10,16-KD LG	35
10890.1	PZK 3011/10/7,50/7,62-KD GN	33	10978.1	PZK 3020/2/10,00/10,16 GN	35	11040.1	PZK 3021/16/10,00/10,16-KD GN	35
10891.0	PZK 3011/11/7,50/7,62-KD LG	33	10979.0	PZK 3020/3/10,00/10,16 LG	35	11041.0	PZK 3021/17/10,00/10,16-KD LG	35
10891.1	PZK 3011/11/7,50/7,62-KD GN	33	10979.1	PZK 3020/3/10,00/10,16 GN	35	11041.1	PZK 3021/17/10,00/10,16-KD GN	35
10892.0	PZK 3011/12/7,50/7,62-KD LG	33	10980.0	PZK 3020/4/10,00/10,16 LG	35	11042.0	PZK 3021/18/10,00/10,16-KD LG	35
10892.1	PZK 3011/12/7,50/7,62-KD GN	33	10980.1	PZK 3020/4/10,00/10,16 GN	35	11042.1	PZK 3021/18/10,00/10,16-KD GN	35
10893.0	PZK 3011/13/7,50/7,62-KD LG	33	10981.0	PZK 3020/5/10,00/10,16 LG	35	11043.0	PZK 3021/19/10,00/10,16-KD LG	35
10893.1	PZK 3011/13/7,50/7,62-KD GN	33	10981.1	PZK 3020/5/10,00/10,16 GN	35	11043.1	PZK 3021/19/10,00/10,16-KD GN	35
10894.0	PZK 3011/14/7,50/7,62-KD LG	33	10982.0	PZK 3020/6/10,00/10,16 LG	35	11044.0	PZK 3021/20/10,00/10,16-KD LG	35
10894.1	PZK 3011/14/7,50/7,62-KD GN	33	10982.1	PZK 3020/6/10,00/10,16 GN	35	11044.1	PZK 3021/20/10,00/10,16-KD GN	35
10895.0	PZK 3011/15/7,50/7,62-KD LG	33	10983.0	PZK 3020/7/10,00/10,16 LG	35	11045.0	PZK 3021/21/10,00/10,16-KD LG	35
10895.1	PZK 3011/15/7,50/7,62-KD GN	33	10983.1	PZK 3020/7/10,00/10,16 GN	35	11045.1	PZK 3021/21/10,00/10,16-KD GN	35
10896.0	PZK 3011/16/7,50/7,62-KD LG	33	10984.0	PZK 3020/8/10,00/10,16 LG	35	11046.0	PZK 3021/22/10,00/10,16-KD LG	35
10896.1	PZK 3011/16/7,50/7,62-KD GN	33	10984.1	PZK 3020/8/10,00/10,16 GN	35	11046.1	PZK 3021/22/10,00/10,16-KD GN	35
10897.0	PZK 3011/17/7,50/7,62-KD LG	33	10985.0	PZK 3020/9/10,00/10,16 LG	35	11047.0	PZK 3021/23/10,00/10,16-KD LG	35
10897.1	PZK 3011/17/7,50/7,62-KD GN	33	10985.1	PZK 3020/9/10,00/10,16 GN	35	11047.1	PZK 3021/23/10,00/10,16-KD GN	35
10898.0	PZK 3011/18/7,50/7,62-KD LG	33	10986.0	PZK 3020/10/10,00/10,16 LG	35	11048.0	PZK 3021/24/10,00/10,16-KD LG	35
10898.1	PZK 3011/18/7,50/7,62-KD GN	33	10986.1	PZK 3020/10/10,00/10,16 GN	35	11048.1	PZK 3021/24/10,00/10,16-KD GN	35
10899.0	PZK 3011/19/7,50/7,62-KD LG	33	10987.0	PZK 3020/11/10,00/10,16 LG	35	11074.0	PZK 3100/2/5,00/5,08 LG	26
10899.1	PZK 3011/19/7,50/7,62-KD GN	33	10987.1	PZK 3020/11/10,00/10,16 GN	35	11074.1	PZK 3100/2/5,00/5,08 GN	26
10900.0	PZK 3011/20/7,50/7,62-KD LG	33	10988.0	PZK 3020/12/10,00/10,16 LG	35	11075.0	PZK 3100/3/5,00/5,08 LG	26
10900.1	PZK 3011/20/7,50/7,62-KD GN	33	10988.1	PZK 3020/12/10,00/10,16 GN	35	11075.1	PZK 3100/3/5,00/5,08 GN	26
10901.0	PZK 3011/21/7,50/7,62-KD LG	33	10989.0	PZK 3020/13/10,00/10,16 LG	35	11076.0	PZK 3100/4/5,00/5,08 LG	26
10901.1	PZK 3011/21/7,50/7,62-KD GN	33	10989.1	PZK 3020/13/10,00/10,16 GN	35	11076.1	PZK 3100/4/5,00/5,08 GN	26
10902.0	PZK 3011/22/7,50/7,62-KD LG	33	10990.0	PZK 3020/14/10,00/10,16 LG	35	11077.0	PZK 3100/5/5,00/5,08 LG	26
10902.1	PZK 3011/22/7,50/7,62-KD GN	33	10990.1	PZK 3020/14/10,00/10,16 GN	35	11077.1	PZK 3100/5/5,00/5,08 GN	26
10903.0	PZK 3011/23/7,50/7,62-KD LG	33	10991.0	PZK 3020/15/10,00/10,16 LG	35	11078.0	PZK 3100/6/5,00/5,08 LG	26
10903.1	PZK 3011/23/7,50/7,62-KD GN	33	10991.1	PZK 3020/15/10,00/10,16 GN	35	11078.1	PZK 3100/6/5,00/5,08 GN	26
10904.0	PZK 3011/24/7,50/7,62-KD LG	33	10992.0	PZK 3020/16/10,00/10,16 LG	35	11079.0	PZK 3100/7/5,00/5,08 LG	26
10904.1	PZK 3011/24/7,50/7,62-KD GN	33	10992.1	PZK 3020/16/10,00/10,16 GN	35	11079.1	PZK 3100/7/5,00/5,08 GN	26
10930.0	PZK 3011/2/7,50/7,62-FD LG	34	10993.0	PZK 3020/17/10,00/10,16 LG	35	11080.0	PZK 3100/8/5,00/5,08 LG	26
10930.1	PZK 3011/2/7,50/7,62-FD GN	34	10993.1	PZK 3020/17/10,00/10,16 GN	35	11080.1	PZK 3100/8/5,00/5,08 GN	26
10931.0	PZK 3011/3/7,50/7,62-FD LG	34	10994.0	PZK 3020/18/10,00/10,16 LG	35	11081.0	PZK 3100/9/5,00/5,08 LG	26
10931.1	PZK 3011/3/7,50/7,62-FD GN	34	10994.1	PZK 3020/18/10,00/10,16 GN	35	11081.1	PZK 3100/9/5,00/5,08 GN	26
10932.0	PZK 3011/4/7,50/7,62-FD LG	34	10995.0	PZK 3020/19/10,00/10,16 LG	35	11082.0	PZK 3100/10/5,00/5,08 LG	26
10932.1	PZK 3011/4/7,50/7,62-FD GN	34	10995.1	PZK 3020/19/10,00/10,16 GN	35	11082.1	PZK 3100/10/5,00/5,08 GN	26
10933.0	PZK 3011/5/7,50/7,62-FD LG	34	10996.0	PZK 3020/20/10,00/10,16 LG	35	11083.0	PZK 3100/11/5,00/5,08 LG	26
10933.1	PZK 3011/5/7,50/7,62-FD GN	34	10996.1	PZK 3020/20/10,00/10,16 GN	35	11083.1	PZK 3100/11/5,00/5,08 GN	26
10934.0	PZK 3011/6/7,50/7,62-FD LG	34	10997.0	PZK 3020/21/10,00/10,16 LG	35	11084.0	PZK 3100/12/5,00/5,08 LG	26
10934.1	PZK 3011/6/7,50/7,62-FD GN	34	10997.1	PZK 3020/21/10,00/10,16 GN	35	11084.1	PZK 3100/12/5,00/5,08 GN	26
10935.0	PZK 3011/7/7,50/7,62-FD LG	34	10998.0	PZK 3020/22/10,00/10,16 LG	35	11085.0	PZK 3100/13/5,00/5,08 LG	26
10935.1	PZK 3011/7/7,50/7,62-FD GN	34	10998.1	PZK 3020/22/10,00/10,16 GN	35	11085.1	PZK 3100/13/5,00/5,08 GN	26
10936.0	PZK 3011/8/7,50/7,62-FD LG	34	10999.0	PZK 3020/23/10,00/10,16 LG	35	11086.0	PZK 3100/14/5,00/5,08 LG	26
10936.1	PZK 3011/8/7,50/7,62-FD GN	34	10999.1	PZK 3020/23/10,00/10,16 GN	35	11086.1	PZK 3100/14/5,00/5,08 GN	26
10937.0	PZK 3011/9/7,50/7,62-FD LG	34				11087.0	PZK 3100/15/5,00/5,08 LG	26
10937.1	PZK 3011/9/7,50/7,62-FD GN	34				11087.1	PZK 3100/15/5,00/5,08 GN	26
10938.0	PZK 3011/10/7,50/7,62-FD LG	34				11088.0	PZK 3100/16/5,00/5,08 LG	26
10938.1	PZK 3011/10/7,50/7,62-FD GN	34				11088.1	PZK 3100/16/5,00/5,08 GN	26
10939.0	PZK 3011/11/7,50/7,62-FD LG	34				11089.0	PZK 3100/17/5,00/5,08 LG	26
10939.1	PZK 3011/11/7,50/7,62-FD GN	34				11089.1	PZK 3100/17/5,00/5,08 GN	26
10940.0	PZK 3011/12/7,50/7,62-FD LG	34				11090.0	PZK 3100/18/5,00/5,08 LG	26
10940.1	PZK 3011/12/7,50/7,62-FD GN	34				11090.1	PZK 3100/18/5,00/5,08 GN	26
10941.0	PZK 3011/13/7,50/7,62-FD LG	34				11091.0	PZK 3100/19/5,00/5,08 LG	26
10941.1	PZK 3011/13/7,50/7,62-FD GN	34				11091.1	PZK 3100/19/5,00/5,08 GN	26
10942.0	PZK 3011/14/7,50/7,62-FD LG	34				11092.0	PZK 3100/20/5,00/5,08 LG	26
10942.1	PZK 3011/14/7,50/7,62-FD GN	34				11092.1	PZK 3100/20/5,00/5,08 GN	26
10943.0	PZK 3011/15/7,50/7,62-FD LG	34				11093.0	PZK 3100/21/5,00/5,08 LG	26
10943.1	PZK 3011/15/7,50/7,62-FD GN	34				11093.1	PZK 3100/21/5,00/5,08 GN	26
10944.0	PZK 3011/16/7,50/7,62-FD LG	34				11094.0	PZK 3100/22/5,00/5,08 LG	26
10944.1	PZK 3011/16/7,50/7,62-FD GN	34				11094.1	PZK 3100/22/5,00/5,08 GN	26
10945.0	PZK 3011/17/7,50/7,62-FD LG	34				11095.0	PZK 3100/23/5,00/5,08 LG	26
10945.1	PZK 3011/17/7,50/7,62-FD GN	34				11095.1	PZK 3100/23/5,00/5,08 GN	26
10946.0	PZK 3011/18/7,50/7,62-FD LG	34				11096.0	PZK 3100/24/5,00/5,08 LG	26
10946.1	PZK 3011/18/7,50/7,62-FD GN	34				11096.1	PZK 3100/24/5,00/5,08 GN	26
10947.0	PZK 3011/19/7,50/7,62-FD LG	34				11122.0	PZK 3101/2/5,00/5,08-WD LG	26

11

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
11122.1	PZK 3101/2/5,00/5,08-WD GN	26	11184.4	PKB 130/6/10,00 DG	125	11238.1	PKB 950/10/5,08 GN	112
11123.0	PZK 3101/3/5,00/5,08-WD LG	26	11185.1	PKB 130/2/5,00-BL GN	123	11239.1	PKB 950/11/5,08 GN	112
11123.1	PZK 3101/3/5,00/5,08-WD GN	26	11185.4	PKB 130/2/5,00-BL DG	123	11240.1	PKB 950/12/5,08 GN	112
11124.0	PZK 3101/4/5,00/5,08-WD LG	26	11186.1	PKB 130/3/5,00-BL GN	123	11241.1	PKB 950/13/5,08 GN	112
11124.1	PZK 3101/4/5,00/5,08-WD GN	26	11186.4	PKB 130/3/5,00-BL DG	123	11242.1	PKB 950/14/5,08 GN	112
11125.0	PZK 3101/5/5,00/5,08-WD LG	26	11187.1	PKB 130/4/5,00-BL GN	123	11243.1	PKB 950/15/5,08 GN	112
11125.1	PZK 3101/5/5,00/5,08-WD GN	26	11187.4	PKB 130/4/5,00-BL DG	123	11244.1	PKB 950/16/5,08 GN	112
11126.0	PZK 3101/6/5,00/5,08-WD LG	26	11188.1	PKB 130/5/5,00-BL GN	123	11245.1	PKB 950/17/5,08 GN	112
11126.1	PZK 3101/6/5,00/5,08-WD GN	26	11188.4	PKB 130/5/5,00-BL DG	123	11246.1	PKB 950/18/5,08 GN	112
11127.0	PZK 3101/7/5,00/5,08-WD LG	26	11189.1	PKB 130/6/5,00-BL GN	123	11247.1	PKB 950/19/5,08 GN	112
11127.1	PZK 3101/7/5,00/5,08-WD GN	26	11189.4	PKB 130/6/5,00-BL DG	123	11248.1	PKB 950/20/5,08 GN	112
11128.0	PZK 3101/8/5,00/5,08-WD LG	26	11190.1	PKB 130/7/5,00-BL GN	123	11249.1	PKB 950/21/5,08 GN	112
11128.1	PZK 3101/8/5,00/5,08-WD GN	26	11190.4	PKB 130/7/5,00-BL DG	123	11250.1	PKB 950/22/5,08 GN	112
11129.0	PZK 3101/9/5,00/5,08-WD LG	26	11191.1	PKB 130/8/5,00-BL GN	123	11251.1	PKB 950/23/5,08 GN	112
11129.1	PZK 3101/9/5,00/5,08-WD GN	26	11191.4	PKB 130/8/5,00-BL DG	123	11252.1	PKB 950/24/5,08 GN	112
11130.0	PZK 3101/10/5,00/5,08-WD LG	26	11192.1	PKB 130/9/5,00-BL GN	123	11253.1	PKB 960/2/7,62 GN	118
11130.1	PZK 3101/10/5,00/5,08-WD GN	26	11192.4	PKB 130/9/5,00-BL DG	123	11254.1	PKB 960/3/7,62 GN	118
11131.0	PZK 3101/11/5,00/5,08-WD LG	26	11193.1	PKB 130/10/5,00-BL GN	123	11255.1	PKB 960/4/7,62 GN	118
11131.1	PZK 3101/11/5,00/5,08-WD GN	26	11193.4	PKB 130/10/5,00-BL DG	123	11256.1	PKB 960/5/7,62 GN	118
11132.0	PZK 3101/12/5,00/5,08-WD LG	26	11194.1	PKB 130/11/5,00-BL GN	123	11257.1	PKB 960/6/7,62 GN	118
11132.1	PZK 3101/12/5,00/5,08-WD GN	26	11194.4	PKB 130/11/5,00-BL DG	123	11258.1	PKB 960/7/7,62 GN	118
11133.0	PZK 3101/13/5,00/5,08-WD LG	26	11195.1	PKB 130/12/5,00-BL GN	123	11259.1	PKB 960/8/7,62 GN	118
11133.1	PZK 3101/13/5,00/5,08-WD GN	26	11195.4	PKB 130/12/5,00-BL DG	123	11260.1	PKB 960/9/7,62 GN	118
11134.0	PZK 3101/14/5,00/5,08-WD LG	26	11196.1	PKB 130/13/5,00-BL GN	123	11261.1	PKB 960/10/7,62 GN	118
11134.1	PZK 3101/14/5,00/5,08-WD GN	26	11196.4	PKB 130/13/5,00-BL DG	123	11262.1	PKB 960/11/7,62 GN	118
11135.0	PZK 3101/15/5,00/5,08-WD LG	26	11197.1	PKB 130/14/5,00-BL GN	123	11263.1	PKB 960/12/7,62 GN	118
11135.1	PZK 3101/15/5,00/5,08-WD GN	26	11197.4	PKB 130/14/5,00-BL DG	123	11264.1	PKB 960/13/7,62 GN	118
11136.0	PZK 3101/16/5,00/5,08-WD LG	26	11198.1	PKB 130/15/5,00-BL GN	123	11265.1	PKB 960/14/7,62 GN	118
11136.1	PZK 3101/16/5,00/5,08-WD GN	26	11198.4	PKB 130/15/5,00-BL DG	123	11266.1	PKB 960/15/7,62 GN	118
11137.0	PZK 3101/17/5,00/5,08-WD LG	26	11199.1	PKB 130/16/5,00-BL GN	123	11267.1	PKB 960/16/7,62 GN	118
11137.1	PZK 3101/17/5,00/5,08-WD GN	26	11199.4	PKB 130/16/5,00-BL DG	123	11268.1	PKB 950/2/5,00-F GN	108
11138.0	PZK 3101/18/5,00/5,08-WD LG	26	11200.1	PKB 130/2/10,00-BL GN	125	11269.1	PKB 950/3/5,00-F GN	108
11138.1	PZK 3101/18/5,00/5,08-WD GN	26	11200.4	PKB 130/2/10,00-BL DG	125	11270.1	PKB 950/4/5,00-F GN	108
11139.0	PZK 3101/19/5,00/5,08-WD LG	26	11201.1	PKB 130/3/10,00-BL GN	125	11271.1	PKB 950/5/5,00-F GN	108
11139.1	PZK 3101/19/5,00/5,08-WD GN	26	11201.4	PKB 130/3/10,00-BL DG	125	11272.1	PKB 950/6/5,00-F GN	108
11140.0	PZK 3101/20/5,00/5,08-WD LG	26	11202.1	PKB 130/4/10,00-BL GN	125	11273.1	PKB 950/7/5,00-F GN	108
11140.1	PZK 3101/20/5,00/5,08-WD GN	26	11202.4	PKB 130/4/10,00-BL DG	125	11274.1	PKB 950/8/5,00-F GN	108
11141.0	PZK 3101/21/5,00/5,08-WD LG	26	11203.1	PKB 130/5/10,00-BL GN	125	11275.1	PKB 950/9/5,00-F GN	108
11141.1	PZK 3101/21/5,00/5,08-WD GN	26	11203.4	PKB 130/5/10,00-BL DG	125	11276.1	PKB 950/10/5,00-F GN	108
11142.0	PZK 3101/22/5,00/5,08-WD LG	26	11204.1	PKB 130/6/10,00-BL GN	125	11277.1	PKB 950/2/5,08-F GN	112
11142.1	PZK 3101/22/5,00/5,08-WD GN	26	11204.4	PKB 130/6/10,00-BL DG	125	11278.1	PKB 950/3/5,08-F GN	112
11143.0	PZK 3101/23/5,00/5,08-WD LG	26	11205.1	PKB 130/7/10,00-BL GN	125	11279.1	PKB 950/4/5,08-F GN	112
11143.1	PZK 3101/23/5,00/5,08-WD GN	26	11205.4	PKB 130/7/10,00-BL DG	125	11280.1	PKB 950/5/5,08-F GN	112
11144.0	PZK 3101/24/5,00/5,08-WD LG	26	11206.1	PKB 130/8/10,00-BL GN	125	11281.1	PKB 950/6/5,08-F GN	112
11144.1	PZK 3101/24/5,00/5,08-WD GN	26	11206.4	PKB 130/8/10,00-BL DG	125	11282.1	PKB 950/7/5,08-F GN	112
11169.1	PKB 130/2/5,00 GN	123	11207.1	PKB 950/2/5,00 GN	108	11283.1	PKB 950/8/5,08-F GN	112
11169.4	PKB 130/2/5,00 DG	123	11208.1	PKB 950/3/5,00 GN	108	11284.1	PKB 950/9/5,08-F GN	112
11170.1	PKB 130/3/5,00 GN	123	11209.1	PKB 950/4/5,00 GN	108	11285.1	PKB 950/10/5,08-F GN	112
11170.4	PKB 130/3/5,00 DG	123	11210.1	PKB 950/5/5,00 GN	108	11286.1	PKB 1100/2/5,00 GN	111
11171.1	PKB 130/4/5,00 GN	123	11211.1	PKB 950/6/5,00 GN	108	11287.1	PKB 1100/3/5,00 GN	111
11171.4	PKB 130/4/5,00 DG	123	11212.1	PKB 950/7/5,00 GN	108	11288.1	PKB 1100/4/5,00 GN	111
11172.1	PKB 130/5/5,00 GN	123	11213.1	PKB 950/8/5,00 GN	108	11289.1	PKB 1100/5/5,00 GN	111
11172.4	PKB 130/5/5,00 DG	123	11214.1	PKB 950/9/5,00 GN	108	11290.1	PKB 1100/6/5,00 GN	111
11173.1	PKB 130/6/5,00 GN	123	11215.1	PKB 950/10/5,00 GN	108	11291.1	PKB 1100/7/5,00 GN	111
11173.4	PKB 130/6/5,00 DG	123	11216.1	PKB 950/11/5,00 GN	108	11292.1	PKB 1100/8/5,00 GN	111
11174.1	PKB 130/7/5,00 GN	123	11217.1	PKB 950/12/5,00 GN	108	11293.1	PKB 1100/9/5,00 GN	111
11174.4	PKB 130/7/5,00 DG	123	11218.1	PKB 950/13/5,00 GN	108	11294.1	PKB 1100/10/5,00 GN	111
11175.1	PKB 130/8/5,00 GN	123	11219.1	PKB 950/14/5,00 GN	108	11295.1	PKB 1100/11/5,00 GN	111
11175.4	PKB 130/8/5,00 DG	123	11220.1	PKB 950/15/5,00 GN	108	11296.1	PKB 1100/12/5,00 GN	111
11176.1	PKB 130/9/5,00 GN	123	11221.1	PKB 950/16/5,00 GN	108	11297.1	PKB 1100/13/5,00 GN	111
11176.4	PKB 130/9/5,00 DG	123	11222.1	PKB 950/17/5,00 GN	108	11298.1	PKB 1100/14/5,00 GN	111
11177.1	PKB 130/10/5,00 GN	123	11223.1	PKB 950/18/5,00 GN	108	11299.1	PKB 1100/15/5,00 GN	111
11177.4	PKB 130/10/5,00 DG	123	11224.1	PKB 950/19/5,00 GN	108	11300.1	PKB 1100/16/5,00 GN	111
11178.1	PKB 130/11/5,00 GN	123	11225.1	PKB 950/20/5,00 GN	108	11301.1	PKB 1100/17/5,00 GN	111
11178.4	PKB 130/11/5,00 DG	123	11226.1	PKB 950/21/5,00 GN	108	11302.1	PKB 1100/18/5,00 GN	111
11179.1	PKB 130/12/5,00 GN	123	11227.1	PKB 950/22/5,00 GN	108	11303.1	PKB 1100/19/5,00 GN	111
11179.4	PKB 130/12/5,00 DG	123	11228.1	PKB 950/23/5,00 GN	108	11304.1	PKB 1100/20/5,00 GN	111
11180.1	PKB 130/2/10,00 GN	125	11229.1	PKB 950/24/5,00 GN	108	11305.1	PKB 1100/2/5,08 GN	115
11180.4	PKB 130/2/10,00 DG	125	11230.1	PKB 950/2/5,08 GN	112	11306.1	PKB 1100/3/5,08 GN	115
11181.1	PKB 130/3/10,00 GN	125	11231.1	PKB 950/3/5,08 GN	112	11307.1	PKB 1100/4/5,08 GN	115
11181.4	PKB 130/3/10,00 DG	125	11232.1	PKB 950/4/5,08 GN	112	11308.1	PKB 1100/5/5,08 GN	115
11182.1	PKB 130/4/10,00 GN	125	11233.1	PKB 950/5/5,08 GN	112	11309.1	PKB 1100/6/5,08 GN	115
11182.4	PKB 130/4/10,00 DG	125	11234.1	PKB 950/6/5,08 GN	112	11310.1	PKB 1100/7/5,08 GN	115
11183.1	PKB 130/5/10,00 GN	125	11235.1	PKB 950/7/5,08 GN	112	11311.1	PKB 1100/8/5,08 GN	115
11183.4	PKB 130/5/10,00 DG	125	11236.1	PKB 950/8/5,08 GN	112	11312.1	PKB 1100/9/5,08 GN	115
11184.1	PKB 130/6/10,00 GN	125	11237.1	PKB 950/9/5,08 GN	112	11313.1	PKB 1100/10/5,08 GN	115

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
11314.1	PKB 1100/11/5,08 GN	115	11390.1	PKB 1550/15/3,50 GN	102	11467.4	STL 130/11/10,00-V BK	132
11315.1	PKB 1100/12/5,08 GN	115	11391.1	PKB 1550/16/3,50 GN	102	11468.4	STL 130/12/10,00-V BK	132
11316.1	PKB 1100/13/5,08 GN	115	11392.1	PKB 1550/17/3,50 GN	102	11469.4	STL 132/2/5,00-V BK	129
11317.1	PKB 1100/14/5,08 GN	115	11393.1	PKB 1550/18/3,50 GN	102	11470.4	STL 132/3/5,00-V BK	129
11318.1	PKB 1100/15/5,08 GN	115	11394.1	PKB 1550/19/3,50 GN	102	11471.4	STL 132/4/5,00-V BK	129
11319.1	PKB 1100/16/5,08 GN	115	11395.1	PKB 1550/20/3,50 GN	102	11472.4	STL 132/5/5,00-V BK	129
11320.1	PKB 1110/2/5,00 GN	111	11396.1	PKB 1550/2/3,81 GN	105	11473.4	STL 132/6/5,00-V BK	129
11321.1	PKB 1110/3/5,00 GN	111	11397.1	PKB 1550/3/3,81 GN	105	11474.4	STL 132/7/5,00-V BK	129
11322.1	PKB 1110/4/5,00 GN	111	11398.1	PKB 1550/4/3,81 GN	105	11475.4	STL 132/8/5,00-V BK	129
11323.1	PKB 1110/5/5,00 GN	111	11399.1	PKB 1550/5/3,81 GN	105	11476.4	STL 132/9/5,00-V BK	129
11324.1	PKB 1110/6/5,00 GN	111	11400.1	PKB 1550/6/3,81 GN	105	11477.4	STL 132/10/5,00-V BK	129
11325.1	PKB 1110/7/5,00 GN	111	11401.1	PKB 1550/7/3,81 GN	105	11478.4	STL 132/11/5,00-V BK	129
11326.1	PKB 1110/8/5,00 GN	111	11402.1	PKB 1550/8/3,81 GN	105	11479.4	STL 132/12/5,00-V BK	129
11327.1	PKB 1110/9/5,00 GN	111	11403.1	PKB 1550/9/3,81 GN	105	11480.4	STL 132/13/5,00-V BK	129
11328.1	PKB 1110/10/5,00 GN	111	11404.1	PKB 1550/10/3,81 GN	105	11481.4	STL 132/14/5,00-V BK	129
11329.1	PKB 1110/11/5,00 GN	111	11405.1	PKB 1550/11/3,81 GN	105	11482.4	STL 132/15/5,00-V BK	129
11330.1	PKB 1110/12/5,00 GN	111	11406.1	PKB 1550/12/3,81 GN	105	11483.4	STL 132/16/5,00-V BK	129
11331.1	PKB 1110/13/5,00 GN	111	11407.1	PKB 1550/13/3,81 GN	105	11484.4	STL 132/17/5,00-V BK	129
11332.1	PKB 1110/14/5,00 GN	111	11408.1	PKB 1550/14/3,81 GN	105	11485.4	STL 132/18/5,00-V BK	129
11333.1	PKB 1110/15/5,00 GN	111	11409.1	PKB 1550/15/3,81 GN	105	11486.4	STL 132/19/5,00-V BK	129
11334.1	PKB 1110/16/5,00 GN	111	11410.1	PKB 1550/16/3,81 GN	105	11487.4	STL 132/20/5,00-V BK	129
11335.1	PKB 1110/17/5,00 GN	111	11412.1	PZB 3950/2/5,00 GN	98	11488.4	STL 132/21/5,00-V BK	129
11336.1	PKB 1110/18/5,00 GN	111	11413.1	PZB 3950/3/5,00 GN	98	11489.4	STL 132/22/5,00-V BK	129
11337.1	PKB 1110/19/5,00 GN	111	11414.1	PZB 3950/4/5,00 GN	98	11490.4	STL 132/23/5,00-V BK	129
11338.1	PKB 1110/20/5,00 GN	111	11415.1	PZB 3950/5/5,00 GN	98	11491.4	STL 132/24/5,00-V BK	129
11339.1	PKB 1110/2/5,08 GN	116	11416.1	PZB 3950/6/5,00 GN	98	11492.4	STL 140/2/5,00-H BK	130
11340.1	PKB 1110/3/5,08 GN	116	11417.1	PZB 3950/7/5,00 GN	98	11493.4	STL 140/3/5,00-H BK	130
11341.1	PKB 1110/4/5,08 GN	116	11418.1	PZB 3950/8/5,00 GN	98	11494.4	STL 140/4/5,00-H BK	130
11342.1	PKB 1110/5/5,08 GN	116	11419.1	PZB 3950/9/5,00 GN	98	11495.4	STL 140/5/5,00-H BK	130
11343.1	PKB 1110/6/5,08 GN	116	11420.1	PZB 3950/10/5,00 GN	98	11496.4	STL 140/6/5,00-H BK	130
11344.1	PKB 1110/7/5,08 GN	116	11421.1	PZB 3950/11/5,00 GN	98	11497.4	STL 140/7/5,00-H BK	130
11345.1	PKB 1110/8/5,08 GN	116	11422.1	PZB 3950/12/5,00 GN	98	11498.4	STL 140/8/5,00-H BK	130
11346.1	PKB 1110/9/5,08 GN	116	11423.1	PZB 3950/13/5,00 GN	98	11499.4	STL 140/9/5,00-H BK	130
11347.1	PKB 1110/10/5,08 GN	116	11424.1	PZB 3950/14/5,00 GN	98	11500.4	STL 140/10/5,00-H BK	130
11348.1	PKB 1110/11/5,08 GN	116	11425.1	PZB 3950/15/5,00 GN	98	11501.4	STL 140/11/5,00-H BK	130
11349.1	PKB 1110/12/5,08 GN	116	11426.1	PZB 3950/16/5,00 GN	98	11502.4	STL 140/12/5,00-H BK	130
11350.1	PKB 1110/13/5,08 GN	116	11427.1	PZB 3950/17/5,00 GN	98	11503.4	STL 140/13/5,00-H BK	130
11351.1	PKB 1110/14/5,08 GN	116	11428.1	PZB 3950/18/5,00 GN	98	11504.4	STL 140/14/5,00-H BK	130
11352.1	PKB 1110/15/5,08 GN	116	11429.1	PZB 3950/19/5,00 GN	98	11505.4	STL 140/15/5,00-H BK	130
11353.1	PKB 1110/16/5,08 GN	116	11430.1	PZB 3950/20/5,00 GN	98	11506.4	STL 140/16/5,00-H BK	130
11354.1	PBT 1200/2/5,08 GN	121	11431.1	PZB 3950/21/5,00 GN	98	11507.4	STL 140/17/5,00-H BK	130
11355.1	PBT 1200/3/5,08 GN	121	11432.1	PZB 3950/22/5,00 GN	98	11508.4	STL 140/18/5,00-H BK	130
11356.1	PBT 1200/4/5,08 GN	121	11433.1	PZB 3950/23/5,00 GN	98	11509.4	STL 140/19/5,00-H BK	130
11357.1	PBT 1200/5/5,08 GN	121	11434.1	PZB 3950/24/5,00 GN	98	11510.4	STL 140/20/5,00-H BK	130
11358.1	PBT 1200/6/5,08 GN	121	11435.4	STL 130/2/5,00-V BK	129	11511.4	STL 140/21/5,00-H BK	130
11359.1	PBT 1200/7/5,08 GN	121	11436.4	STL 130/3/5,00-V BK	129	11512.4	STL 140/22/5,00-H BK	130
11360.1	PBT 1200/8/5,08 GN	121	11437.4	STL 130/4/5,00-V BK	129	11513.4	STL 140/23/5,00-H BK	130
11361.1	PBT 1200/9/5,08 GN	121	11438.4	STL 130/5/5,00-V BK	129	11514.4	STL 140/24/5,00-H BK	130
11362.1	PBT 1200/10/5,08 GN	121	11439.4	STL 130/6/5,00-V BK	129	11515.1	STL 950/2/5,00-V GN	143
11363.1	PBT 1200/11/5,08 GN	121	11440.4	STL 130/7/5,00-V BK	129	11516.1	STL 950/3/5,00-V GN	143
11364.1	PBT 1200/12/5,08 GN	121	11441.4	STL 130/8/5,00-V BK	129	11517.1	STL 950/4/5,00-V GN	143
11365.1	PBT 1200/13/5,08 GN	121	11442.4	STL 130/9/5,00-V BK	129	11518.1	STL 950/5/5,00-V GN	143
11366.1	PBT 1200/14/5,08 GN	121	11443.4	STL 130/10/5,00-V BK	129	11519.1	STL 950/6/5,00-V GN	143
11367.1	PBT 1200/15/5,08 GN	121	11444.4	STL 130/11/5,00-V BK	129	11520.1	STL 950/7/5,00-V GN	143
11368.1	PBT 1200/16/5,08 GN	121	11445.4	STL 130/12/5,00-V BK	129	11521.1	STL 950/8/5,00-V GN	143
11369.1	PBT 1200/17/5,08 GN	121	11446.4	STL 130/13/5,00-V BK	129	11522.1	STL 950/9/5,00-V GN	143
11370.1	PBT 1200/18/5,08 GN	121	11447.4	STL 130/14/5,00-V BK	129	11523.1	STL 950/10/5,00-V GN	143
11371.1	PBT 1200/19/5,08 GN	121	11448.4	STL 130/15/5,00-V BK	129	11524.1	STL 950/11/5,00-V GN	143
11372.1	PBT 1200/20/5,08 GN	121	11449.4	STL 130/16/5,00-V BK	129	11525.1	STL 950/12/5,00-V GN	143
11373.1	PBT 1200/21/5,08 GN	121	11450.4	STL 130/17/5,00-V BK	129	11526.1	STL 950/13/5,00-V GN	143
11374.1	PBT 1200/22/5,08 GN	121	11451.4	STL 130/18/5,00-V BK	129	11527.1	STL 950/14/5,00-V GN	143
11375.1	PBT 1200/23/5,08 GN	121	11452.4	STL 130/19/5,00-V BK	129	11528.1	STL 950/15/5,00-V GN	143
11376.1	PBT 1200/24/5,08 GN	121	11453.4	STL 130/20/5,00-V BK	129	11529.1	STL 950/16/5,00-V GN	143
11377.1	PKB 1550/2/3,50 GN	102	11454.4	STL 130/21/5,00-V BK	129	11530.1	STL 950/17/5,00-V GN	143
11378.1	PKB 1550/3/3,50 GN	102	11455.4	STL 130/22/5,00-V BK	129	11531.1	STL 950/18/5,00-V GN	143
11379.1	PKB 1550/4/3,50 GN	102	11456.4	STL 130/23/5,00-V BK	129	11532.1	STL 950/19/5,00-V GN	143
11380.1	PKB 1550/5/3,50 GN	102	11457.4	STL 130/24/5,00-V BK	129	11533.1	STL 950/20/5,00-V GN	143
11381.1	PKB 1550/6/3,50 GN	102	11458.4	STL 130/2/10,00-V BK	132	11534.1	STL 950/21/5,00-V GN	143
11382.1	PKB 1550/7/3,50 GN	102	11459.4	STL 130/3/10,00-V BK	132	11535.1	STL 950/22/5,00-V GN	143
11383.1	PKB 1550/8/3,50 GN	102	11460.4	STL 130/4/10,00-V BK	132	11536.1	STL 950/23/5,00-V GN	143
11384.1	PKB 1550/9/3,50 GN	102	11461.4	STL 130/5/10,00-V BK	132	11537.1	STL 950/24/5,00-V GN	143
11385.1	PKB 1550/10/3,50 GN	102	11462.4	STL 130/6/10,00-V BK	132	11538.1	STL 950/2/5,08-V GN	151
11386.1	PKB 1550/11/3,50 GN	102	11463.4	STL 130/7/10,00-V BK	132	11539.1	STL 950/3/5,08-V GN	151
11387.1	PKB 1550/12/3,50 GN	102	11464.4	STL 130/8/10,00-V BK	132	11540.1	STL 950/4/5,08-V GN	151
11388.1	PKB 1550/13/3,50 GN	102	11465.4	STL 130/9/10,00-V BK	132	11541.1	STL 950/5/5,08-V GN	151
11389.1	PKB 1550/14/3,50 GN	102	11466.4	STL 130/10/10,00-V BK	132	11542.1	STL 950/6/5,08-V GN	151

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
11543.1	STL 950/7/5,08-V GN	151	11619.1	STL 950/14/5,00-V-G GN	145	11695.1	STL 950/21/5,08-H-G GN	153
11544.1	STL 950/8/5,08-V GN	151	11620.1	STL 950/15/5,00-V-G GN	145	11696.1	STL 950/22/5,08-H-G GN	153
11545.1	STL 950/9/5,08-V GN	151	11621.1	STL 950/16/5,00-V-G GN	145	11697.1	STL 950/23/5,08-H-G GN	153
11546.1	STL 950/10/5,08-V GN	151	11622.1	STL 950/17/5,00-V-G GN	145	11698.1	STL 950/24/5,08-H-G GN	153
11547.1	STL 950/11/5,08-V GN	151	11623.1	STL 950/18/5,00-V-G GN	145	11699.1	STL 960/2/7,62-V GN	162
11548.1	STL 950/12/5,08-V GN	151	11624.1	STL 950/19/5,00-V-G GN	145	11700.1	STL 960/3/7,62-V GN	162
11549.1	STL 950/13/5,08-V GN	151	11625.1	STL 950/20/5,00-V-G GN	145	11701.1	STL 960/4/7,62-V GN	162
11550.1	STL 950/14/5,08-V GN	151	11626.1	STL 950/21/5,00-V-G GN	145	11702.1	STL 960/5/7,62-V GN	162
11551.1	STL 950/15/5,08-V GN	151	11627.1	STL 950/22/5,00-V-G GN	145	11703.1	STL 960/6/7,62-V GN	162
11552.1	STL 950/16/5,08-V GN	151	11628.1	STL 950/23/5,00-V-G GN	145	11704.1	STL 960/7/7,62-V GN	162
11553.1	STL 950/17/5,08-V GN	151	11629.1	STL 950/24/5,00-V-G GN	145	11705.1	STL 960/8/7,62-V GN	162
11554.1	STL 950/18/5,08-V GN	151	11630.1	STL 950/2/5,08-V-G GN	153	11706.1	STL 960/9/7,62-V GN	162
11555.1	STL 950/19/5,08-V GN	151	11631.1	STL 950/3/5,08-V-G GN	153	11707.1	STL 960/10/7,62-V GN	162
11556.1	STL 950/20/5,08-V GN	151	11632.1	STL 950/4/5,08-V-G GN	153	11708.1	STL 960/11/7,62-V GN	162
11557.1	STL 950/21/5,08-V GN	151	11633.1	STL 950/5/5,08-V-G GN	153	11709.1	STL 960/12/7,62-V GN	162
11558.1	STL 950/22/5,08-V GN	151	11634.1	STL 950/6/5,08-V-G GN	153	11710.1	STL 960/13/7,62-V GN	162
11559.1	STL 950/23/5,08-V GN	151	11635.1	STL 950/7/5,08-V-G GN	153	11711.1	STL 960/14/7,62-V GN	162
11560.1	STL 950/24/5,08-V GN	151	11636.1	STL 950/8/5,08-V-G GN	153	11712.1	STL 960/15/7,62-V GN	162
11561.1	STL 950/2/5,00-H GN	143	11637.1	STL 950/9/5,08-V-G GN	153	11713.1	STL 960/16/7,62-V GN	162
11562.1	STL 950/3/5,00-H GN	143	11638.1	STL 950/10/5,08-V-G GN	153	11714.1	STL 960/2/7,62-H GN	162
11563.1	STL 950/4/5,00-H GN	143	11639.1	STL 950/11/5,08-V-G GN	153	11715.1	STL 960/3/7,62-H GN	162
11564.1	STL 950/5/5,00-H GN	143	11640.1	STL 950/12/5,08-V-G GN	153	11716.1	STL 960/4/7,62-H GN	162
11565.1	STL 950/6/5,00-H GN	143	11641.1	STL 950/13/5,08-V-G GN	153	11717.1	STL 960/5/7,62-H GN	162
11566.1	STL 950/7/5,00-H GN	143	11642.1	STL 950/14/5,08-V-G GN	153	11718.1	STL 960/6/7,62-H GN	162
11567.1	STL 950/8/5,00-H GN	143	11643.1	STL 950/15/5,08-V-G GN	153	11719.1	STL 960/7/7,62-H GN	162
11568.1	STL 950/9/5,00-H GN	143	11644.1	STL 950/16/5,08-V-G GN	153	11720.1	STL 960/8/7,62-H GN	162
11569.1	STL 950/10/5,00-H GN	143	11645.1	STL 950/17/5,08-V-G GN	153	11721.1	STL 960/9/7,62-H GN	162
11570.1	STL 950/11/5,00-H GN	143	11646.1	STL 950/18/5,08-V-G GN	153	11722.1	STL 960/10/7,62-H GN	162
11571.1	STL 950/12/5,00-H GN	143	11647.1	STL 950/19/5,08-V-G GN	153	11723.1	STL 960/11/7,62-H GN	162
11572.1	STL 950/13/5,00-H GN	143	11648.1	STL 950/20/5,08-V-G GN	153	11724.1	STL 960/12/7,62-H GN	162
11573.1	STL 950/14/5,00-H GN	143	11649.1	STL 950/21/5,08-V-G GN	153	11725.1	STL 960/13/7,62-H GN	162
11574.1	STL 950/15/5,00-H GN	143	11650.1	STL 950/22/5,08-V-G GN	153	11726.1	STL 960/14/7,62-H GN	162
11575.1	STL 950/16/5,00-H GN	143	11651.1	STL 950/23/5,08-V-G GN	153	11727.1	STL 960/15/7,62-H GN	162
11576.1	STL 950/17/5,00-H GN	143	11652.1	STL 950/24/5,08-V-G GN	153	11728.1	STL 960/16/7,62-H GN	162
11577.1	STL 950/18/5,00-H GN	143	11653.1	STL 950/2/5,00-H-G GN	145	11729.1	STL 960/2/7,62-V-G GN	163
11578.1	STL 950/19/5,00-H GN	143	11654.1	STL 950/3/5,00-H-G GN	145	11730.1	STL 960/3/7,62-V-G GN	163
11579.1	STL 950/20/5,00-H GN	143	11655.1	STL 950/4/5,00-H-G GN	145	11731.1	STL 960/4/7,62-V-G GN	163
11580.1	STL 950/21/5,00-H GN	143	11656.1	STL 950/5/5,00-H-G GN	145	11732.1	STL 960/5/7,62-V-G GN	163
11581.1	STL 950/22/5,00-H GN	143	11657.1	STL 950/6/5,00-H-G GN	145	11733.1	STL 960/6/7,62-V-G GN	163
11582.1	STL 950/23/5,00-H GN	143	11658.1	STL 950/7/5,00-H-G GN	145	11734.1	STL 960/7/7,62-V-G GN	163
11583.1	STL 950/24/5,00-H GN	143	11659.1	STL 950/8/5,00-H-G GN	145	11735.1	STL 960/8/7,62-V-G GN	163
11584.1	STL 950/2/5,08-H GN	151	11660.1	STL 950/9/5,00-H-G GN	145	11736.1	STL 960/9/7,62-V-G GN	163
11585.1	STL 950/3/5,08-H GN	151	11661.1	STL 950/10/5,00-H-G GN	145	11737.1	STL 960/10/7,62-V-G GN	163
11586.1	STL 950/4/5,08-H GN	151	11662.1	STL 950/11/5,00-H-G GN	145	11738.1	STL 960/11/7,62-V-G GN	163
11587.1	STL 950/5/5,08-H GN	151	11663.1	STL 950/12/5,00-H-G GN	145	11739.1	STL 960/12/7,62-V-G GN	163
11588.1	STL 950/6/5,08-H GN	151	11664.1	STL 950/13/5,00-H-G GN	145	11740.1	STL 960/13/7,62-V-G GN	163
11589.1	STL 950/7/5,08-H GN	151	11665.1	STL 950/14/5,00-H-G GN	145	11741.1	STL 960/14/7,62-V-G GN	163
11590.1	STL 950/8/5,08-H GN	151	11666.1	STL 950/15/5,00-H-G GN	145	11742.1	STL 960/15/7,62-V-G GN	163
11591.1	STL 950/9/5,08-H GN	151	11667.1	STL 950/16/5,00-H-G GN	145	11743.1	STL 960/16/7,62-V-G GN	163
11592.1	STL 950/10/5,08-H GN	151	11668.1	STL 950/17/5,00-H-G GN	145	11744.1	STL 960/2/7,62-H-G GN	163
11593.1	STL 950/11/5,08-H GN	151	11669.1	STL 950/18/5,00-H-G GN	145	11745.1	STL 960/3/7,62-H-G GN	163
11594.1	STL 950/12/5,08-H GN	151	11670.1	STL 950/19/5,00-H-G GN	145	11746.1	STL 960/4/7,62-H-G GN	163
11595.1	STL 950/13/5,08-H GN	151	11671.1	STL 950/20/5,00-H-G GN	145	11747.1	STL 960/5/7,62-H-G GN	163
11596.1	STL 950/14/5,08-H GN	151	11672.1	STL 950/21/5,00-H-G GN	145	11748.1	STL 960/6/7,62-H-G GN	163
11597.1	STL 950/15/5,08-H GN	151	11673.1	STL 950/22/5,00-H-G GN	145	11749.1	STL 960/7/7,62-H-G GN	163
11598.1	STL 950/16/5,08-H GN	151	11674.1	STL 950/23/5,00-H-G GN	145	11750.1	STL 960/8/7,62-H-G GN	163
11599.1	STL 950/17/5,08-H GN	151	11675.1	STL 950/24/5,00-H-G GN	145	11751.1	STL 960/9/7,62-H-G GN	163
11600.1	STL 950/18/5,08-H GN	151	11676.1	STL 950/2/5,08-H-G GN	153	11752.1	STL 960/10/7,62-H-G GN	163
11601.1	STL 950/19/5,08-H GN	151	11677.1	STL 950/3/5,08-H-G GN	153	11753.1	STL 960/11/7,62-H-G GN	163
11602.1	STL 950/20/5,08-H GN	151	11678.1	STL 950/4/5,08-H-G GN	153	11754.1	STL 960/12/7,62-H-G GN	163
11603.1	STL 950/21/5,08-H GN	151	11679.1	STL 950/5/5,08-H-G GN	153	11755.1	STL 960/13/7,62-H-G GN	163
11604.1	STL 950/22/5,08-H GN	151	11680.1	STL 950/6/5,08-H-G GN	153	11756.1	STL 960/14/7,62-H-G GN	163
11605.1	STL 950/23/5,08-H GN	151	11681.1	STL 950/7/5,08-H-G GN	153	11757.1	STL 960/15/7,62-H-G GN	163
11606.1	STL 950/24/5,08-H GN	151	11682.1	STL 950/8/5,08-H-G GN	153	11758.1	STL 960/16/7,62-H-G GN	163
11607.1	STL 950/2/5,00-V-G GN	145	11683.1	STL 950/9/5,08-H-G GN	153	11759.1	STL 970/2/5,08-V GN	159
11608.1	STL 950/3/5,00-V-G GN	145	11684.1	STL 950/10/5,08-H-G GN	153	11760.1	STL 970/3/5,08-V GN	159
11609.1	STL 950/4/5,00-V-G GN	145	11685.1	STL 950/11/5,08-H-G GN	153	11761.1	STL 970/4/5,08-V GN	159
11610.1	STL 950/5/5,00-V-G GN	145	11686.1	STL 950/12/5,08-H-G GN	153	11762.1	STL 970/5/5,08-V GN	159
11611.1	STL 950/6/5,00-V-G GN	145	11687.1	STL 950/13/5,08-H-G GN	153	11763.1	STL 970/6/5,08-V GN	159
11612.1	STL 950/7/5,00-V-G GN	145	11688.1	STL 950/14/5,08-H-G GN	153	11764.1	STL 970/7/5,08-V GN	159
11613.1	STL 950/8/5,00-V-G GN	145	11689.1	STL 950/15/5,08-H-G GN	153	11765.1	STL 970/8/5,08-V GN	159
11614.1	STL 950/9/5,00-V-G GN	145	11690.1	STL 950/16/5,08-H-G GN	153	11766.1	STL 970/9/5,08-V GN	159
11615.1	STL 950/10/5,00-V-G GN	145	11691.1	STL 950/17/5,08-H-G GN	153	11767.1	STL 970/10/5,08-V GN	159
11616.1	STL 950/11/5,00-V-G GN	145	11692.1	STL 950/18/5,08-H-G GN	153	11768.1	STL 970/11/5,08-V GN	159
11617.1	STL 950/12/5,00-V-G GN	145	11693.1	STL 950/19/5,08-H-G GN	153	11769.1	STL 970/12/5,08-V GN	159
11618.1	STL 950/13/5,00-V-G GN	145	11694.1	STL 950/20/5,08-H-G GN	153	11770.1	STL 970/2/5,08-H GN	159

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
11771.1	STL 970/3/5,08-H GN	159	11847.1	STL 990/4/5,08-G GN	157	11932.1	STL 1550/4/3,81-H-G GN	139
11772.1	STL 970/4/5,08-H GN	159	11848.1	STL 990/5/5,08-G GN	157	11933.1	STL 1550/5/3,81-H-G GN	139
11773.1	STL 970/5/5,08-H GN	159	11849.1	STL 990/6/5,08-G GN	157	11934.1	STL 1550/6/3,81-H-G GN	139
11774.1	STL 970/6/5,08-H GN	159	11850.1	STL 990/7/5,08-G GN	157	11935.1	STL 1550/7/3,81-H-G GN	139
11775.1	STL 970/7/5,08-H GN	159	11851.1	STL 990/8/5,08-G GN	157	11936.1	STL 1550/8/3,81-H-G GN	139
11776.1	STL 970/8/5,08-H GN	159	11852.1	STL 990/9/5,08-G GN	157	11937.1	STL 1550/9/3,81-H-G GN	139
11777.1	STL 970/9/5,08-H GN	159	11853.1	STL 990/10/5,08-G GN	157	11938.1	STL 1550/10/3,81-H-G GN	139
11778.1	STL 970/10/5,08-H GN	159	11854.1	STL 990/11/5,08-G GN	157	11939.1	STL 1550/11/3,81-H-G GN	139
11779.1	STL 970/11/5,08-H GN	159	11855.1	STL 990/12/5,08-G GN	157	11940.1	STL 1550/12/3,81-H-G GN	139
11780.1	STL 970/12/5,08-H GN	159	11856.1	STL 990/13/5,08-G GN	157	11941.1	STL 1550/13/3,81-H-G GN	139
11781.1	STL 950/2/5,00-H-F GN	147	11857.1	STL 990/14/5,08-G GN	157	11942.1	STL 1550/14/3,81-H-G GN	139
11782.1	STL 950/3/5,00-H-F GN	147	11858.1	STL 990/15/5,08-G GN	157	11943.1	STL 1550/15/3,81-H-G GN	139
11783.1	STL 950/4/5,00-H-F GN	147	11859.1	STL 990/16/5,08-G GN	157	11944.1	STL 1550/16/3,81-H-G GN	139
11784.1	STL 950/5/5,00-H-F GN	147	11860.1	STL 990/17/5,08-G GN	157	11945.1	STL 1570/2/3,81-V-G GN	142
11785.1	STL 950/6/5,00-H-F GN	147	11861.1	STL 990/18/5,08-G GN	157	11946.1	STL 1570/3/3,81-V-G GN	142
11786.1	STL 950/7/5,00-H-F GN	147	11862.1	STL 990/19/5,08-G GN	157	11947.1	STL 1570/4/3,81-V-G GN	142
11787.1	STL 950/8/5,00-H-F GN	147	11863.1	STL 990/20/5,08-G GN	157	11948.1	STL 1570/5/3,81-V-G GN	142
11788.1	STL 950/9/5,00-H-F GN	147	11864.1	STL 990/21/5,08-G GN	157	11949.1	STL 1570/6/3,81-V-G GN	142
11789.1	STL 950/10/5,00-H-F GN	147	11865.1	STL 990/22/5,08-G GN	157	11950.1	STL 1570/7/3,81-V-G GN	142
11790.1	STL 950/2/5,08-H-F GN	155	11866.1	STL 990/23/5,08-G GN	157	11951.1	STL 1570/8/3,81-V-G GN	142
11791.1	STL 950/3/5,08-H-F GN	155	11867.1	STL 990/24/5,08-G GN	157	11952.1	STL 1570/9/3,81-V-G GN	142
11792.1	STL 950/4/5,08-H-F GN	155	11877.1	STL 1550/2/3,50-V-G GN	134	11953.1	STL 1570/10/3,81-V-G GN	142
11793.1	STL 950/5/5,08-H-F GN	155	11878.1	STL 1550/3/3,50-V-G GN	134	11954.1	STL 1570/11/3,81-V-G GN	142
11794.1	STL 950/6/5,08-H-F GN	155	11879.1	STL 1550/4/3,50-V-G GN	134	11955.1	STL 1570/12/3,81-V-G GN	142
11795.1	STL 950/7/5,08-H-F GN	155	11880.1	STL 1550/5/3,50-V-G GN	134	11956.1	STL 1570/13/3,81-V-G GN	142
11796.1	STL 950/8/5,08-H-F GN	155	11881.1	STL 1550/6/3,50-V-G GN	134	11957.1	STL 1570/14/3,81-V-G GN	142
11797.1	STL 950/9/5,08-H-F GN	155	11882.1	STL 1550/7/3,50-V-G GN	134	11958.1	STL 1570/15/3,81-V-G GN	142
11798.1	STL 950/10/5,08-H-F GN	155	11883.1	STL 1550/8/3,50-V-G GN	134	11959.1	STL 1570/16/3,81-V-G GN	142
11799.1	STL 975/2/5,00-V-G GN	149	11884.1	STL 1550/9/3,50-V-G GN	134	11960.1	STL 1570/17/3,81-V-G GN	142
11800.1	STL 975/3/5,00-V-G GN	149	11885.1	STL 1550/10/3,50-V-G GN	134	11961.1	STL 1570/18/3,81-V-G GN	142
11801.1	STL 975/4/5,00-V-G GN	149	11886.1	STL 1550/11/3,50-V-G GN	134	11962.1	STL 1570/19/3,81-V-G GN	142
11802.1	STL 975/5/5,00-V-G GN	149	11887.1	STL 1550/12/3,50-V-G GN	134	11963.1	STL 1570/20/3,81-V-G GN	142
11803.1	STL 975/6/5,00-V-G GN	149	11888.1	STL 1550/13/3,50-V-G GN	134	11964.1	STL 1570/2/3,81-H-G GN	142
11804.1	STL 975/7/5,00-V-G GN	149	11889.1	STL 1550/14/3,50-V-G GN	134	11965.1	STL 1570/3/3,81-H-G GN	142
11805.1	STL 975/8/5,00-V-G GN	149	11890.1	STL 1550/15/3,50-V-G GN	134	11966.1	STL 1570/4/3,81-H-G GN	142
11806.1	STL 975/9/5,00-V-G GN	149	11891.1	STL 1550/16/3,50-V-G GN	134	11967.1	STL 1570/5/3,81-H-G GN	142
11807.1	STL 975/10/5,00-V-G GN	149	11892.1	STL 1550/17/3,50-V-G GN	134	11968.1	STL 1570/6/3,81-H-G GN	142
11808.1	STL 975/11/5,00-V-G GN	149	11893.1	STL 1550/18/3,50-V-G GN	134	11969.1	STL 1570/7/3,81-H-G GN	142
11809.1	STL 975/12/5,00-V-G GN	149	11894.1	STL 1550/19/3,50-V-G GN	134	11970.1	STL 1570/8/3,81-H-G GN	142
11810.1	STL 975/13/5,00-V-G GN	149	11895.1	STL 1550/20/3,50-V-G GN	134	11971.1	STL 1570/9/3,81-H-G GN	142
11811.1	STL 975/14/5,00-V-G GN	149	11896.1	STL 1550/2/3,81-V-G GN	139	11972.1	STL 1570/10/3,81-H-G GN	142
11812.1	STL 975/15/5,00-V-G GN	149	11897.1	STL 1550/3/3,81-V-G GN	139	11973.1	STL 1570/11/3,81-H-G GN	142
11813.1	STL 975/16/5,00-V-G GN	149	11898.1	STL 1550/4/3,81-V-G GN	139	11974.1	STL 1570/12/3,81-H-G GN	142
11814.1	STL 975/17/5,00-V-G GN	149	11899.1	STL 1550/5/3,81-V-G GN	139	11975.1	STL 1570/13/3,81-H-G GN	142
11815.1	STL 975/18/5,00-V-G GN	149	11900.1	STL 1550/6/3,81-V-G GN	139	11976.1	STL 1570/14/3,81-H-G GN	142
11816.1	STL 975/19/5,00-V-G GN	149	11901.1	STL 1550/7/3,81-V-G GN	139	11977.1	STL 1570/15/3,81-H-G GN	142
11817.1	STL 975/20/5,00-V-G GN	149	11902.1	STL 1550/8/3,81-V-G GN	139	11978.1	STL 1570/16/3,81-H-G GN	142
11818.1	STL 975/21/5,00-V-G GN	149	11903.1	STL 1550/9/3,81-V-G GN	139	11979.1	STL 1570/17/3,81-H-G GN	142
11819.1	STL 975/22/5,00-V-G GN	149	11904.1	STL 1550/10/3,81-V-G GN	139	11980.1	STL 1570/18/3,81-H-G GN	142
11820.1	STL 975/23/5,00-V-G GN	149	11905.1	STL 1550/11/3,81-V-G GN	139	11981.1	STL 1570/19/3,81-H-G GN	142
11821.1	STL 975/24/5,00-V-G GN	149	11906.1	STL 1550/12/3,81-V-G GN	139	11982.1	STL 1570/20/3,81-H-G GN	142
11822.1	STL 975/2/5,00-H-G GN	149	11907.1	STL 1550/13/3,81-V-G GN	139	11983.1	STL 1590/2/3,81-G GN	141
11823.1	STL 975/3/5,00-H-G GN	149	11908.1	STL 1550/14/3,81-V-G GN	139	11984.1	STL 1590/3/3,81-G GN	141
11824.1	STL 975/4/5,00-H-G GN	149	11909.1	STL 1550/15/3,81-V-G GN	139	11985.1	STL 1590/4/3,81-G GN	141
11825.1	STL 975/5/5,00-H-G GN	149	11910.1	STL 1550/16/3,81-V-G GN	139	11986.1	STL 1590/5/3,81-G GN	141
11826.1	STL 975/6/5,00-H-G GN	149	11911.1	STL 1550/2/3,50-H-G GN	134	11987.1	STL 1590/6/3,81-G GN	141
11827.1	STL 975/7/5,00-H-G GN	149	11912.1	STL 1550/3/3,50-H-G GN	134	11988.1	STL 1590/7/3,81-G GN	141
11828.1	STL 975/8/5,00-H-G GN	149	11913.1	STL 1550/4/3,50-H-G GN	134	11989.1	STL 1590/8/3,81-G GN	141
11829.1	STL 975/9/5,00-H-G GN	149	11914.1	STL 1550/5/3,50-H-G GN	134	11990.1	STL 1590/9/3,81-G GN	141
11830.1	STL 975/10/5,00-H-G GN	149	11915.1	STL 1550/6/3,50-H-G GN	134	11991.1	STL 1590/10/3,81-G GN	141
11831.1	STL 975/11/5,00-H-G GN	149	11916.1	STL 1550/7/3,50-H-G GN	134	11992.1	STL 1590/11/3,81-G GN	141
11832.1	STL 975/12/5,00-H-G GN	149	11917.1	STL 1550/8/3,50-H-G GN	134	11993.1	STL 1590/12/3,81-G GN	141
11833.1	STL 975/13/5,00-H-G GN	149	11918.1	STL 1550/9/3,50-H-G GN	134	11994.1	STL 1590/13/3,81-G GN	141
11834.1	STL 975/14/5,00-H-G GN	149	11919.1	STL 1550/10/3,50-H-G GN	134	11995.1	STL 1590/14/3,81-G GN	141
11835.1	STL 975/15/5,00-H-G GN	149	11920.1	STL 1550/11/3,50-H-G GN	134	11996.1	STL 1590/15/3,81-G GN	141
11836.1	STL 975/16/5,00-H-G GN	149	11921.1	STL 1550/12/3,50-H-G GN	134	11997.1	STL 1590/16/3,81-G GN	141
11837.1	STL 975/17/5,00-H-G GN	149	11922.1	STL 1550/13/3,50-H-G GN	134	11998.1	STL 1590/17/3,81-G GN	141
11838.1	STL 975/18/5,00-H-G GN	149	11923.1	STL 1550/14/3,50-H-G GN	134	11999.1	STL 1590/18/3,81-G GN	141
11839.1	STL 975/19/5,00-H-G GN	149	11924.1	STL 1550/15/3,50-H-G GN	134			
11840.1	STL 975/20/5,00-H-G GN	149	11925.1	STL 1550/16/3,50-H-G GN	134			
11841.1	STL 975/21/5,00-H-G GN	149	11926.1	STL 1550/17/3,50-H-G GN	134			
11842.1	STL 975/22/5,00-H-G GN	149	11927.1	STL 1550/18/3,50-H-G GN	134			
11843.1	STL 975/23/5,00-H-G GN	149	11928.1	STL 1550/19/3,50-H-G GN	134			
11844.1	STL 975/24/5,00-H-G GN	149	11929.1	STL 1550/20/3,50-H-G GN	134			
11845.1	STL 990/2/5,08-G GN	157	11930.1	STL 1550/2/3,81-H-G GN	139			
11846.1	STL 990/3/5,08-G GN	157	11931.1	STL 1550/3/3,81-H-G GN	139			

12

12000.1	STL 1590/19/3,81-G GN	141
12001.1	STL 1590/20/3,81-G GN	141
12002.9	K1 RD	93-95, 98, 108-116, 118, 184

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
12003.9	K2 RD	143-149, 151-157, 159-164, 170, 171, 184	12123.3	PZK 3191/19/2,54 OG	25	12355.1	PK 350/19/5,00-V GN	42
			12124.3	PZK 3191/20/2,54 OG	25	12356.1	PK 350/20/5,00-V GN	42
			12125.3	PZK 3191/21/2,54 OG	25	12357.1	PK 350/21/5,00-V GN	42
			12126.3	PZK 3191/22/2,54 OG	25	12358.1	PK 350/22/5,00-V GN	42
			12127.3	PZK 3191/23/2,54 OG	25	12359.1	PK 350/23/5,00-V GN	42
12004.9	K3 RD	134, 135, 137, 139, 140-142, 150, 165, 166, 184	12128.3	PZK 3191/24/2,54 OG	25	12360.1	PK 350/24/5,00-V GN	42
			12153.3	PZK 3191/2/2,54-KD OG	25	12361.1	PK 350/13/5,08-V GN	49
			12154.3	PZK 3191/3/2,54-KD OG	25	12362.1	PK 350/14/5,08-V GN	49
			12155.3	PZK 3191/4/2,54-KD OG	25	12363.1	PK 350/15/5,08-V GN	49
			12156.3	PZK 3191/5/2,54-KD OG	25	12364.1	PK 350/16/5,08-V GN	49
			12157.3	PZK 3191/6/2,54-KD OG	25	12365.1	PK 350/17/5,08-V GN	49
			12158.3	PZK 3191/7/2,54-KD OG	25	12366.1	PK 350/18/5,08-V GN	49
			12159.3	PZK 3191/8/2,54-KD OG	25	12367.1	PK 350/19/5,08-V GN	49
12010.0	PZK 3191/2/2,50 LG	24	12160.3	PZK 3191/9/2,54-KD OG	25	12368.1	PK 350/20/5,08-V GN	49
12011.0	PZK 3191/3/2,50 LG	24	12161.3	PZK 3191/10/2,54-KD OG	25	12369.1	PK 350/21/5,08-V GN	49
12012.0	PZK 3191/4/2,50 LG	24	12162.3	PZK 3191/11/2,54-KD OG	25	12370.1	PK 350/22/5,08-V GN	49
12013.0	PZK 3191/5/2,50 LG	24	12163.3	PZK 3191/12/2,54-KD OG	25	12371.1	PK 350/23/5,08-V GN	49
12014.0	PZK 3191/6/2,50 LG	24	12164.3	PZK 3191/13/2,54-KD OG	25	12372.1	PK 350/24/5,08-V GN	49
12015.0	PZK 3191/7/2,50 LG	24	12165.3	PZK 3191/14/2,54-KD OG	25	12373.1	PK 100/13/5,00-H GN	70
12016.0	PZK 3191/8/2,50 LG	24	12166.3	PZK 3191/15/2,54-KD OG	25	12373.4	PK 100/13/5,00-H DG	70
12017.0	PZK 3191/9/2,50 LG	24	12167.3	PZK 3191/16/2,54-KD OG	25	12374.1	PK 100/14/5,00-H GN	70
12018.0	PZK 3191/10/2,50 LG	24	12168.3	PZK 3191/17/2,54-KD OG	25	12374.4	PK 100/14/5,00-H DG	70
12019.0	PZK 3191/11/2,50 LG	24	12169.3	PZK 3191/18/2,54-KD OG	25	12375.1	PK 100/15/5,00-H GN	70
12020.0	PZK 3191/12/2,50 LG	24	12170.3	PZK 3191/19/2,54-KD OG	25	12375.4	PK 100/15/5,00-H DG	70
12021.0	PZK 3191/13/2,50 LG	24	12171.3	PZK 3191/20/2,54-KD OG	25	12376.1	PK 100/16/5,00-H GN	70
12022.0	PZK 3191/14/2,50 LG	24	12172.3	PZK 3191/21/2,54-KD OG	25	12376.4	PK 100/16/5,00-H DG	70
12023.0	PZK 3191/15/2,50 LG	24	12173.3	PZK 3191/22/2,54-KD OG	25	12377.1	PK 100/17/5,00-H GN	70
12024.0	PZK 3191/16/2,50 LG	24	12174.3	PZK 3191/23/2,54-KD OG	25	12377.4	PK 100/17/5,00-H DG	70
12025.0	PZK 3191/17/2,50 LG	24	12175.3	PZK 3191/24/2,54-KD OG	25	12378.1	PK 100/18/5,00-H GN	70
12026.0	PZK 3191/18/2,50 LG	24	12201.1	STL 950/2/5,00-V-F GN	147	12378.4	PK 100/18/5,00-H DG	70
12027.0	PZK 3191/19/2,50 LG	24	12202.1	STL 950/3/5,00-V-F GN	147	12379.1	PK 100/19/5,00-H GN	70
12028.0	PZK 3191/20/2,50 LG	24	12203.1	STL 950/4/5,00-V-F GN	147	12379.4	PK 100/19/5,00-H DG	70
12029.0	PZK 3191/21/2,50 LG	24	12204.1	STL 950/5/5,00-V-F GN	147	12380.1	PK 100/20/5,00-H GN	70
12030.0	PZK 3191/22/2,50 LG	24	12205.1	STL 950/6/5,00-V-F GN	147	12380.4	PK 100/20/5,00-H DG	70
12031.0	PZK 3191/23/2,50 LG	24	12206.1	STL 950/7/5,00-V-F GN	147	12381.1	PK 100/21/5,00-H GN	70
12032.0	PZK 3191/24/2,50 LG	24	12207.1	STL 950/8/5,00-V-F GN	147	12381.4	PK 100/21/5,00-H DG	70
12057.0	PZK 3191/2/2,50-KD LG	24	12208.1	STL 950/9/5,00-V-F GN	147	12382.1	PK 100/22/5,00-H GN	70
12058.0	PZK 3191/3/2,50-KD LG	24	12209.1	STL 950/10/5,00-V-F GN	147	12382.4	PK 100/22/5,00-H DG	70
12059.0	PZK 3191/4/2,50-KD LG	24	12210.1	STL 950/2/5,08-V-F GN	155	12383.1	PK 100/23/5,00-H GN	70
12060.0	PZK 3191/5/2,50-KD LG	24	12211.1	STL 950/3/5,08-V-F GN	155	12383.4	PK 100/23/5,00-H DG	70
12061.0	PZK 3191/6/2,50-KD LG	24	12212.1	STL 950/4/5,08-V-F GN	155	12384.1	PK 100/24/5,00-H GN	70
12062.0	PZK 3191/7/2,50-KD LG	24	12213.1	STL 950/5/5,08-V-F GN	155	12384.4	PK 100/24/5,00-H DG	70
12063.0	PZK 3191/8/2,50-KD LG	24	12214.1	STL 950/6/5,08-V-F GN	155	12385.1	PK 100/13/5,00-V GN	70
12064.0	PZK 3191/9/2,50-KD LG	24	12215.1	STL 950/7/5,08-V-F GN	155	12385.4	PK 100/13/5,00-V DG	70
12065.0	PZK 3191/10/2,50-KD LG	24	12216.1	STL 950/8/5,08-V-F GN	155	12386.1	PK 100/14/5,00-V GN	70
12066.0	PZK 3191/11/2,50-KD LG	24	12217.1	STL 950/9/5,08-V-F GN	155	12386.4	PK 100/14/5,00-V DG	70
12067.0	PZK 3191/12/2,50-KD LG	24	12218.1	STL 950/10/5,08-V-F GN	155	12387.1	PK 100/15/5,00-V GN	70
12068.0	PZK 3191/13/2,50-KD LG	24	12319.1	PK-TS/2/5,08 GN	170	12387.4	PK 100/15/5,00-V DG	70
12069.0	PZK 3191/14/2,50-KD LG	24	12320.1	PK-TS/3/5,08 GN	170	12388.1	PK 100/16/5,00-V GN	70
12070.0	PZK 3191/15/2,50-KD LG	24	12321.1	PK-TS/4/5,08 GN	170	12388.4	PK 100/16/5,00-V DG	70
12071.0	PZK 3191/16/2,50-KD LG	24	12322.1	PK-TS/5/5,08 GN	170	12389.1	PK 100/17/5,00-V GN	70
12072.0	PZK 3191/17/2,50-KD LG	24	12323.1	PK-TS/6/5,08 GN	170	12389.4	PK 100/17/5,00-V DG	70
12073.0	PZK 3191/18/2,50-KD LG	24	12324.1	PK-TS/7/5,08 GN	170	12390.1	PK 100/18/5,00-V GN	70
12074.0	PZK 3191/19/2,50-KD LG	24	12325.1	PK-TS/8/5,08 GN	170	12390.4	PK 100/18/5,00-V DG	70
12075.0	PZK 3191/20/2,50-KD LG	24	12326.1	PK-TS/9/5,08 GN	170	12391.1	PK 100/19/5,00-V GN	70
12076.0	PZK 3191/21/2,50-KD LG	24	12327.1	PK-TS/10/5,08 GN	170	12391.4	PK 100/19/5,00-V DG	70
12077.0	PZK 3191/22/2,50-KD LG	24	12328.1	PK-TS/11/5,08 GN	170	12392.1	PK 100/20/5,00-V GN	70
12078.0	PZK 3191/23/2,50-KD LG	24	12329.1	PK-TS/12/5,08 GN	170	12392.4	PK 100/20/5,00-V DG	70
12079.0	PZK 3191/24/2,50-KD LG	24	12330.1	PK-TS/13/5,08 GN	170	12393.1	PK 100/21/5,00-V GN	70
12106.3	PZK 3191/2/2,54 OG	25	12331.1	PK-TS/14/5,08 GN	170	12393.4	PK 100/21/5,00-V DG	70
12107.3	PZK 3191/3/2,54 OG	25	12332.1	PK-TS/15/5,08 GN	170	12394.1	PK 100/22/5,00-V GN	70
12108.3	PZK 3191/4/2,54 OG	25	12333.1	PK-TS/16/5,08 GN	170	12394.4	PK 100/22/5,00-V DG	70
12109.3	PZK 3191/5/2,54 OG	25	12334.1	PK-TS/17/5,08 GN	170	12395.1	PK 100/23/5,00-V GN	70
12110.3	PZK 3191/6/2,54 OG	25	12335.1	PK-TS/18/5,08 GN	170	12395.4	PK 100/23/5,00-V DG	70
12111.3	PZK 3191/7/2,54 OG	25	12336.1	PK-TS/19/5,08 GN	170	12396.1	PK 100/24/5,00-V GN	70
12112.3	PZK 3191/8/2,54 OG	25	12337.1	PK-TS/20/5,08 GN	170	12396.4	PK 100/24/5,00-V DG	70
12113.3	PZK 3191/9/2,54 OG	25	12338.1	PK-TS/21/5,08 GN	170	12397.1	PK 104/13/5,00-V GN	72
12114.3	PZK 3191/10/2,54 OG	25	12339.1	PK-TS/22/5,08 GN	170	12397.4	PK 104/13/5,00-V DG	72
12115.3	PZK 3191/11/2,54 OG	25	12340.1	PK-TS/23/5,08 GN	170	12398.1	PK 104/14/5,00-V GN	72
12116.3	PZK 3191/12/2,54 OG	25	12341.1	PK-TS/24/5,08 GN	170	12398.4	PK 104/14/5,00-V DG	72
12117.3	PZK 3191/13/2,54 OG	25	12349.1	PK 350/13/5,00-V GN	42	12399.1	PK 104/15/5,00-V GN	72
12118.3	PZK 3191/14/2,54 OG	25	12350.1	PK 350/14/5,00-V GN	42	12399.4	PK 104/15/5,00-V DG	72
12119.3	PZK 3191/15/2,54 OG	25	12351.1	PK 350/15/5,00-V GN	42	12400.1	PK 104/16/5,00-V GN	72
12120.3	PZK 3191/16/2,54 OG	25	12352.1	PK 350/16/5,00-V GN	42	12400.4	PK 104/16/5,00-V DG	72
12121.3	PZK 3191/17/2,54 OG	25	12353.1	PK 350/17/5,00-V GN	42	12401.1	PK 104/17/5,00-V GN	72
12122.3	PZK 3191/18/2,54 OG	25	12354.1	PK 350/18/5,00-V GN	42	12401.4	PK 104/17/5,00-V DG	72

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
12402.1	PK 104/18/5,00-V GN	72	12440.1	PK 100/20/5,00-H-BL GN	71	12478.1	PK 110/22/7,50-H GN	76
12402.4	PK 104/18/5,00-V DG	72	12440.4	PK 100/20/5,00-H-BL DG	71	12478.4	PK 110/22/7,50-H DG	76
12403.1	PK 104/19/5,00-V GN	72	12441.1	PK 100/21/5,00-H-BL GN	71	12479.1	PK 110/23/7,50-H GN	76
12403.4	PK 104/19/5,00-V DG	72	12441.4	PK 100/21/5,00-H-BL DG	71	12479.4	PK 110/23/7,50-H DG	76
12404.1	PK 104/20/5,00-V GN	72	12442.1	PK 100/22/5,00-H-BL GN	71	12480.1	PK 110/24/7,50-H GN	76
12404.4	PK 104/20/5,00-V DG	72	12442.4	PK 100/22/5,00-H-BL DG	71	12480.4	PK 110/24/7,50-H DG	76
12405.1	PK 104/21/5,00-V GN	72	12443.1	PK 100/23/5,00-H-BL GN	71	12481.1	PK 120/13/5,08-H GN	74
12405.4	PK 104/21/5,00-V DG	72	12443.4	PK 100/23/5,00-H-BL DG	71	12481.4	PK 120/13/5,08-H DG	74
12406.1	PK 104/22/5,00-V GN	72	12444.1	PK 100/24/5,00-H-BL GN	71	12482.1	PK 120/14/5,08-H GN	74
12406.4	PK 104/22/5,00-V DG	72	12444.4	PK 100/24/5,00-H-BL DG	71	12482.4	PK 120/14/5,08-H DG	74
12407.1	PK 104/23/5,00-V GN	72	12445.1	PK 114/13/7,50-V GN	77	12483.1	PK 120/15/5,08-H GN	74
12407.4	PK 104/23/5,00-V DG	72	12445.4	PK 114/13/7,50-V DG	77	12483.4	PK 120/15/5,08-H DG	74
12408.1	PK 104/24/5,00-V GN	72	12446.1	PK 114/14/7,50-V GN	77	12484.1	PK 120/16/5,08-H GN	74
12408.4	PK 104/24/5,00-V DG	72	12446.4	PK 114/14/7,50-V DG	77	12484.4	PK 120/16/5,08-H DG	74
12409.1	PK 120/13/5,08-V GN	74	12447.1	PK 114/15/7,50-V GN	77	12485.1	PK 120/17/5,08-H GN	74
12409.4	PK 120/13/5,08-V DG	74	12447.4	PK 114/15/7,50-V DG	77	12485.4	PK 120/17/5,08-H DG	74
12410.1	PK 120/14/5,08-V GN	74	12448.1	PK 114/16/7,50-V GN	77	12486.1	PK 120/18/5,08-H GN	74
12410.4	PK 120/14/5,08-V DG	74	12448.4	PK 114/16/7,50-V DG	77	12486.4	PK 120/18/5,08-H DG	74
12411.1	PK 120/15/5,08-V GN	74	12449.1	PK 114/17/7,50-V GN	77	12487.1	PK 120/19/5,08-H GN	74
12411.4	PK 120/15/5,08-V DG	74	12449.4	PK 114/17/7,50-V DG	77	12487.4	PK 120/19/5,08-H DG	74
12412.1	PK 120/16/5,08-V GN	74	12450.1	PK 114/18/7,50-V GN	77	12488.1	PK 120/20/5,08-H GN	74
12412.4	PK 120/16/5,08-V DG	74	12450.4	PK 114/18/7,50-V DG	77	12488.4	PK 120/20/5,08-H DG	74
12413.1	PK 120/17/5,08-V GN	74	12451.1	PK 114/19/7,50-V GN	77	12489.1	PK 120/21/5,08-H GN	74
12413.4	PK 120/17/5,08-V DG	74	12451.4	PK 114/19/7,50-V DG	77	12489.4	PK 120/21/5,08-H DG	74
12414.1	PK 120/18/5,08-V GN	74	12452.1	PK 114/20/7,50-V GN	77	12490.1	PK 120/22/5,08-H GN	74
12414.4	PK 120/18/5,08-V DG	74	12452.4	PK 114/20/7,50-V DG	77	12490.4	PK 120/22/5,08-H DG	74
12415.1	PK 120/19/5,08-V GN	74	12453.1	PK 114/21/7,50-V GN	77	12491.1	PK 120/23/5,08-H GN	74
12415.4	PK 120/19/5,08-V DG	74	12453.4	PK 114/21/7,50-V DG	77	12491.4	PK 120/23/5,08-H DG	74
12416.1	PK 120/20/5,08-V GN	74	12454.1	PK 114/22/7,50-V GN	77	12492.1	PK 120/24/5,08-H GN	74
12416.4	PK 120/20/5,08-V DG	74	12454.4	PK 114/22/7,50-V DG	77	12492.4	PK 120/24/5,08-H DG	74
12417.1	PK 120/21/5,08-V GN	74	12455.1	PK 114/23/7,50-V GN	77	12493.1	PK 500/13/5,00-V GN	67
12417.4	PK 120/21/5,08-V DG	74	12455.4	PK 114/23/7,50-V DG	77	12493.4	PK 500/13/5,00-V DG	67
12418.1	PK 120/22/5,08-V GN	74	12456.1	PK 114/24/7,50-V GN	77	12494.1	PK 500/14/5,00-V GN	67
12418.4	PK 120/22/5,08-V DG	74	12456.4	PK 114/24/7,50-V DG	77	12494.4	PK 500/14/5,00-V DG	67
12419.1	PK 120/23/5,08-V GN	74	12457.1	PK 110/13/7,50-V GN	76	12495.1	PK 500/15/5,00-V GN	67
12419.4	PK 120/23/5,08-V DG	74	12457.4	PK 110/13/7,50-V DG	76	12495.4	PK 500/15/5,00-V DG	67
12420.1	PK 120/24/5,08-V GN	74	12458.1	PK 110/14/7,50-V GN	76	12496.1	PK 500/16/5,00-V GN	67
12420.4	PK 120/24/5,08-V DG	74	12458.4	PK 110/14/7,50-V DG	76	12496.4	PK 500/16/5,00-V DG	67
12421.1	PK 100/13/5,00-V-BL GN	71	12459.1	PK 110/15/7,50-V GN	76	12497.1	PK 500/17/5,00-V GN	67
12421.4	PK 100/13/5,00-V-BL DG	71	12459.4	PK 110/15/7,50-V DG	76	12497.4	PK 500/17/5,00-V DG	67
12422.1	PK 100/14/5,00-V-BL GN	71	12460.1	PK 110/16/7,50-V GN	76	12498.1	PK 500/18/5,00-V GN	67
12422.4	PK 100/14/5,00-V-BL DG	71	12460.4	PK 110/16/7,50-V DG	76	12498.4	PK 500/18/5,00-V DG	67
12423.1	PK 100/15/5,00-V-BL GN	71	12461.1	PK 110/17/7,50-V GN	76	12499.1	PK 500/19/5,00-V GN	67
12423.4	PK 100/15/5,00-V-BL DG	71	12461.4	PK 110/17/7,50-V DG	76	12499.4	PK 500/19/5,00-V DG	67
12424.1	PK 100/16/5,00-V-BL GN	71	12462.1	PK 110/18/7,50-V GN	76	12500.1	PK 500/20/5,00-V GN	67
12424.4	PK 100/16/5,00-V-BL DG	71	12462.4	PK 110/18/7,50-V DG	76	12500.4	PK 500/20/5,00-V DG	67
12425.1	PK 100/17/5,00-V-BL GN	71	12463.1	PK 110/19/7,50-V GN	76	12501.1	PK 500/21/5,00-V GN	67
12425.4	PK 100/17/5,00-V-BL DG	71	12463.4	PK 110/19/7,50-V DG	76	12501.4	PK 500/21/5,00-V DG	67
12426.1	PK 100/18/5,00-V-BL GN	71	12464.1	PK 110/20/7,50-V GN	76	12502.1	PK 500/22/5,00-V GN	67
12426.4	PK 100/18/5,00-V-BL DG	71	12464.4	PK 110/20/7,50-V DG	76	12502.4	PK 500/22/5,00-V DG	67
12427.1	PK 100/19/5,00-V-BL GN	71	12465.1	PK 110/21/7,50-V GN	76	12503.1	PK 500/23/5,00-V GN	67
12427.4	PK 100/19/5,00-V-BL DG	71	12465.4	PK 110/21/7,50-V DG	76	12503.4	PK 500/23/5,00-V DG	67
12428.1	PK 100/20/5,00-V-BL GN	71	12466.1	PK 110/22/7,50-V GN	76	12504.1	PK 500/24/5,00-V GN	67
12428.4	PK 100/20/5,00-V-BL DG	71	12466.4	PK 110/22/7,50-V DG	76	12504.4	PK 500/24/5,00-V DG	67
12429.1	PK 100/21/5,00-V-BL GN	71	12467.1	PK 110/23/7,50-V GN	76	12505.1	PK 500/13/5,08-V GN	73
12429.4	PK 100/21/5,00-V-BL DG	71	12467.4	PK 110/23/7,50-V DG	76	12505.4	PK 500/13/5,08-V DG	73
12430.1	PK 100/22/5,00-V-BL GN	71	12468.1	PK 110/24/7,50-V GN	76	12506.1	PK 500/14/5,08-V GN	73
12430.4	PK 100/22/5,00-V-BL DG	71	12468.4	PK 110/24/7,50-V DG	76	12506.4	PK 500/14/5,08-V DG	73
12431.1	PK 100/23/5,00-V-BL GN	71	12469.1	PK 110/13/7,50-H GN	76	12507.1	PK 500/15/5,08-V GN	73
12431.4	PK 100/23/5,00-V-BL DG	71	12469.4	PK 110/13/7,50-H DG	76	12507.4	PK 500/15/5,08-V DG	73
12432.1	PK 100/24/5,00-V-BL GN	71	12470.1	PK 110/14/7,50-H GN	76	12508.1	PK 500/16/5,08-V GN	73
12432.4	PK 100/24/5,00-V-BL DG	71	12470.4	PK 110/14/7,50-H DG	76	12508.4	PK 500/16/5,08-V DG	73
12433.1	PK 100/13/5,00-H-BL GN	71	12471.1	PK 110/15/7,50-H GN	76	12509.1	PK 500/17/5,08-V GN	73
12433.4	PK 100/13/5,00-H-BL DG	71	12471.4	PK 110/15/7,50-H DG	76	12509.4	PK 500/17/5,08-V DG	73
12434.1	PK 100/14/5,00-H-BL GN	71	12472.1	PK 110/16/7,50-H GN	76	12510.1	PK 500/18/5,08-V GN	73
12434.4	PK 100/14/5,00-H-BL DG	71	12472.4	PK 110/16/7,50-H DG	76	12510.4	PK 500/18/5,08-V DG	73
12435.1	PK 100/15/5,00-H-BL GN	71	12473.1	PK 110/17/7,50-H GN	76	12511.1	PK 500/19/5,08-V GN	73
12435.4	PK 100/15/5,00-H-BL DG	71	12473.4	PK 110/17/7,50-H DG	76	12511.4	PK 500/19/5,08-V DG	73
12436.1	PK 100/16/5,00-H-BL GN	71	12474.1	PK 110/18/7,50-H GN	76	12512.1	PK 500/20/5,08-V GN	73
12436.4	PK 100/16/5,00-H-BL DG	71	12474.4	PK 110/18/7,50-H DG	76	12512.4	PK 500/20/5,08-V DG	73
12437.1	PK 100/17/5,00-H-BL GN	71	12475.1	PK 110/19/7,50-H GN	76	12513.1	PK 500/21/5,08-V GN	73
12437.4	PK 100/17/5,00-H-BL DG	71	12475.4	PK 110/19/7,50-H DG	76	12513.4	PK 500/21/5,08-V DG	73
12438.1	PK 100/18/5,00-H-BL GN	71	12476.1	PK 110/20/7,50-H GN	76	12514.1	PK 500/22/5,08-V GN	73
12438.4	PK 100/18/5,00-H-BL DG	71	12476.4	PK 110/20/7,50-H DG	76	12514.4	PK 500/22/5,08-V DG	73
12439.1	PK 100/19/5,00-H-BL GN	71	12477.1	PK 110/21/7,50-H GN	76	12515.1	PK 500/23/5,08-V GN	73
12439.4	PK 100/19/5,00-H-BL DG	71	12477.4	PK 110/21/7,50-H DG	76	12515.4	PK 500/23/5,08-V DG	73

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
12516.1	PK 500/24/5,08-V GN	73	12554.1	PK 300/14/5,00 GN	41	12592.4	PKD 370/16/5,00-V DG	45
12516.4	PK 500/24/5,08-V DG	73	12554.4	PK 300/14/5,00 DG	41	12593.1	PKD 370/17/5,00-V GN	45
12517.1	PK 500/13/5,00-H GN	67	12555.1	PK 300/15/5,00 GN	41	12593.4	PKD 370/17/5,00-V DG	45
12517.4	PK 500/13/5,00-H DG	67	12555.4	PK 300/15/5,00 DG	41	12594.1	PKD 370/18/5,00-V GN	45
12518.1	PK 500/14/5,00-H GN	67	12556.1	PK 300/16/5,00 GN	41	12594.4	PKD 370/18/5,00-V DG	45
12518.4	PK 500/14/5,00-H DG	67	12557.1	PK 300/17/5,00 GN	41	12595.1	PKD 370/19/5,00-V GN	45
12519.1	PK 500/15/5,00-H GN	67	12557.4	PK 300/17/5,00 DG	41	12595.4	PKD 370/19/5,00-V DG	45
12519.4	PK 500/15/5,00-H DG	67	12558.1	PK 300/18/5,00 GN	41	12596.1	PKD 370/20/5,00-V GN	45
12520.1	PK 500/16/5,00-H GN	67	12558.4	PK 300/18/5,00 DG	41	12596.4	PKD 370/20/5,00-V DG	45
12520.4	PK 500/16/5,00-H DG	67	12559.1	PK 300/19/5,00 GN	41	12597.1	PKD 370/21/5,00-V GN	45
12521.1	PK 500/17/5,00-H GN	67	12559.4	PK 300/19/5,00 DG	41	12597.4	PKD 370/21/5,00-V DG	45
12521.4	PK 500/17/5,00-H DG	67	12560.1	PK 300/20/5,00 GN	41	12598.1	PKD 370/22/5,00-V GN	45
12522.1	PK 500/18/5,00-H GN	67	12560.4	PK 300/20/5,00 DG	41	12598.4	PKD 370/22/5,00-V DG	45
12522.4	PK 500/18/5,00-H DG	67	12561.1	PK 300/21/5,00 GN	41	12599.1	PKD 370/23/5,00-V GN	45
12523.1	PK 500/19/5,00-H GN	67	12561.4	PK 300/21/5,00 DG	41	12599.4	PKD 370/23/5,00-V DG	45
12523.4	PK 500/19/5,00-H DG	67	12562.1	PK 300/22/5,00 GN	41	12600.1	PKD 370/24/5,00-V GN	45
12524.1	PK 500/20/5,00-H GN	67	12562.4	PK 300/22/5,00 DG	41	12600.4	PKD 370/24/5,00-V DG	45
12524.4	PK 500/20/5,00-H DG	67	12563.1	PK 300/23/5,00 GN	41	12609.1	PK 700/13/5,00-V GN	43
12525.1	PK 500/21/5,00-H GN	67	12563.4	PK 300/23/5,00 DG	41	12609.4	PK 700/13/5,00-V DG	43
12525.4	PK 500/21/5,00-H DG	67	12564.1	PK 300/24/5,00 GN	41	12610.1	PK 700/14/5,00-V GN	43
12526.1	PK 500/22/5,00-H GN	67	12564.4	PK 300/24/5,00 DG	41	12610.4	PK 700/14/5,00-V DG	43
12526.4	PK 500/22/5,00-H DG	67	12565.1	PK 300/13/5,08 GN	48	12611.1	PK 700/15/5,00-V GN	43
12527.1	PK 500/23/5,00-H GN	67	12565.4	PK 300/13/5,08 DG	48	12611.4	PK 700/15/5,00-V DG	43
12527.4	PK 500/23/5,00-H DG	67	12566.1	PK 300/14/5,08 GN	48	12612.1	PK 700/16/5,00-V GN	43
12528.1	PK 500/24/5,00-H GN	67	12566.4	PK 300/14/5,08 DG	48	12612.4	PK 700/16/5,00-V DG	43
12528.4	PK 500/24/5,00-H DG	67	12567.1	PK 300/15/5,08 GN	48	12613.1	PK 700/17/5,00-V GN	43
12529.1	PK 500/13/5,08-H GN	73	12567.4	PK 300/15/5,08 DG	48	12613.4	PK 700/17/5,00-V DG	43
12529.4	PK 500/13/5,08-H DG	73	12568.1	PK 300/16/5,08 GN	48	12614.1	PK 700/18/5,00-V GN	43
12530.1	PK 500/14/5,08-H GN	73	12568.4	PK 300/16/5,08 DG	48	12614.4	PK 700/18/5,00-V DG	43
12530.4	PK 500/14/5,08-H DG	73	12569.1	PK 300/17/5,08 GN	48	12615.1	PK 700/19/5,00-V GN	43
12531.1	PK 500/15/5,08-H GN	73	12569.4	PK 300/17/5,08 DG	48	12615.4	PK 700/19/5,00-V DG	43
12531.4	PK 500/15/5,08-H DG	73	12570.1	PK 300/18/5,08 GN	48	12616.1	PK 700/20/5,00-V GN	43
12532.1	PK 500/16/5,08-H GN	73	12570.4	PK 300/18/5,08 DG	48	12616.4	PK 700/20/5,00-V DG	43
12532.4	PK 500/16/5,08-H DG	73	12571.1	PK 300/19/5,08 GN	48	12617.1	PK 700/21/5,00-V GN	43
12533.1	PK 500/17/5,08-H GN	73	12571.4	PK 300/19/5,08 DG	48	12617.4	PK 700/21/5,00-V DG	43
12533.4	PK 500/17/5,08-H DG	73	12572.1	PK 300/20/5,08 GN	48	12618.1	PK 700/22/5,00-V GN	43
12534.1	PK 500/18/5,08-H GN	73	12572.4	PK 300/20/5,08 DG	48	12618.4	PK 700/22/5,00-V DG	43
12534.4	PK 500/18/5,08-H DG	73	12573.1	PK 300/21/5,08 GN	48	12619.1	PK 700/23/5,00-V GN	43
12535.1	PK 500/19/5,08-H GN	73	12573.4	PK 300/21/5,08 DG	48	12619.4	PK 700/23/5,00-V DG	43
12535.4	PK 500/19/5,08-H DG	73	12574.1	PK 300/22/5,08 GN	48	12620.1	PK 700/24/5,00-V GN	43
12536.1	PK 500/20/5,08-H GN	73	12574.4	PK 300/22/5,08 DG	48	12620.4	PK 700/24/5,00-V DG	43
12536.4	PK 500/20/5,08-H DG	73	12575.1	PK 300/23/5,08 GN	48	12621.1	PK 700/13/5,08-V GN	50
12537.1	PK 500/21/5,08-H GN	73	12575.4	PK 300/23/5,08 DG	48	12621.4	PK 700/13/5,08-V DG	50
12537.4	PK 500/21/5,08-H DG	73	12576.1	PK 300/24/5,08 GN	48	12622.1	PK 700/14/5,08-V GN	50
12538.1	PK 500/22/5,08-H GN	73	12576.4	PK 300/24/5,08 DG	48	12622.4	PK 700/14/5,08-V DG	50
12538.4	PK 500/22/5,08-H DG	73	12577.1	PK 360/13/7,50-V GN	54	12623.1	PK 700/15/5,08-V GN	50
12539.1	PK 500/23/5,08-H GN	73	12577.4	PK 360/13/7,50-V DG	54	12623.4	PK 700/15/5,08-V DG	50
12539.4	PK 500/23/5,08-H DG	73	12578.1	PK 360/14/7,50-V GN	54	12624.1	PK 700/16/5,08-V GN	50
12540.1	PK 500/24/5,08-H GN	73	12578.4	PK 360/14/7,50-V DG	54	12624.4	PK 700/16/5,08-V DG	50
12540.4	PK 500/24/5,08-H DG	73	12579.1	PK 360/15/7,50-V GN	54	12625.1	PK 700/17/5,08-V GN	50
12541.1	PK 250/13/5,08-V GN	48	12579.4	PK 360/15/7,50-V DG	54	12625.4	PK 700/17/5,08-V DG	50
12541.4	PK 250/13/5,08-V DG	48	12580.1	PK 360/16/7,50-V GN	54	12626.1	PK 700/18/5,08-V GN	50
12542.1	PK 250/14/5,08-V GN	48	12580.4	PK 360/16/7,50-V DG	54	12626.4	PK 700/18/5,08-V DG	50
12542.4	PK 250/14/5,08-V DG	48	12581.1	PK 360/17/7,50-V GN	54	12627.1	PK 700/19/5,08-V GN	50
12543.1	PK 250/15/5,08-V GN	48	12581.4	PK 360/17/7,50-V DG	54	12627.4	PK 700/19/5,08-V DG	50
12543.4	PK 250/15/5,08-V DG	48	12582.1	PK 360/18/7,50-V GN	54	12628.1	PK 700/20/5,08-V GN	50
12544.1	PK 250/16/5,08-V GN	48	12582.4	PK 360/18/7,50-V DG	54	12628.4	PK 700/20/5,08-V DG	50
12544.4	PK 250/16/5,08-V DG	48	12583.1	PK 360/19/7,50-V GN	54	12629.1	PK 700/21/5,08-V GN	50
12545.1	PK 250/17/5,08-V GN	48	12583.4	PK 360/19/7,50-V DG	54	12629.4	PK 700/21/5,08-V DG	50
12545.4	PK 250/17/5,08-V DG	48	12584.1	PK 360/20/7,50-V GN	54	12630.1	PK 700/22/5,08-V GN	50
12546.1	PK 250/18/5,08-V GN	48	12584.4	PK 360/20/7,50-V DG	54	12630.4	PK 700/22/5,08-V DG	50
12546.4	PK 250/18/5,08-V DG	48	12585.1	PK 360/21/7,50-V GN	54	12631.1	PK 700/23/5,08-V GN	50
12547.1	PK 250/19/5,08-V GN	48	12585.4	PK 360/21/7,50-V DG	54	12631.4	PK 700/23/5,08-V DG	50
12547.4	PK 250/19/5,08-V DG	48	12586.1	PK 360/22/7,50-V GN	54	12632.1	PK 700/24/5,08-V GN	50
12548.1	PK 250/20/5,08-V GN	48	12586.4	PK 360/22/7,50-V DG	54	12632.4	PK 700/24/5,08-V DG	50
12548.4	PK 250/20/5,08-V DG	48	12587.1	PK 360/23/7,50-V GN	54	12633.1	PK 700/13/5,00-H GN	43
12549.1	PK 250/21/5,08-V GN	48	12587.4	PK 360/23/7,50-V DG	54	12633.4	PK 700/13/5,00-H DG	43
12549.4	PK 250/21/5,08-V DG	48	12588.1	PK 360/24/7,50-V GN	54	12634.1	PK 700/14/5,00-H GN	43
12550.1	PK 250/22/5,08-V GN	48	12588.4	PK 360/24/7,50-V DG	54	12634.4	PK 700/14/5,00-H DG	43
12550.4	PK 250/22/5,08-V DG	48	12589.1	PKD 370/13/5,00-V GN	45	12635.1	PK 700/15/5,00-H GN	43
12551.1	PK 250/23/5,08-V GN	48	12589.4	PKD 370/13/5,00-V DG	45	12635.4	PK 700/15/5,00-H DG	43
12551.4	PK 250/23/5,08-V DG	48	12590.1	PKD 370/14/5,00-V GN	45	12636.1	PK 700/16/5,00-H GN	43
12552.1	PK 250/24/5,08-V GN	48	12590.4	PKD 370/14/5,00-V DG	45	12636.4	PK 700/16/5,00-H DG	43
12552.4	PK 250/24/5,08-V DG	48	12591.1	PKD 370/15/5,00-V GN	45	12637.1	PK 700/17/5,00-H GN	43
12553.1	PK 300/13/5,00 GN	41	12591.4	PKD 370/15/5,00-V DG	45	12637.4	PK 700/17/5,00-H DG	43
12553.4	PK 300/13/5,00 DG	41	12592.1	PKD 370/16/5,00-V GN	45	12638.1	PK 700/18/5,00-H GN	43

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
12638.4	PK 700/18/5,00-H DG	43	12676.4	PK 710/20/7,62-V DG	56	12749.1	STL 970/24/5,08-V GN	159
12639.1	PK 700/19/5,00-H GN	43	12677.1	PK 710/21/7,62-V GN	56	12750.1	STL 970/13/5,08-H GN	159
12639.4	PK 700/19/5,00-H DG	43	12677.4	PK 710/21/7,62-V DG	56	12751.1	STL 970/14/5,08-H GN	159
12640.1	PK 700/20/5,00-H GN	43	12678.1	PK 710/22/7,62-V GN	56	12752.1	STL 970/15/5,08-H GN	159
12640.4	PK 700/20/5,00-H DG	43	12678.4	PK 710/22/7,62-V DG	56	12753.1	STL 970/16/5,08-H GN	159
12641.1	PK 700/21/5,00-H GN	43	12679.1	PK 710/23/7,62-V GN	56	12754.1	STL 970/17/5,08-H GN	159
12641.4	PK 700/21/5,00-H DG	43	12679.4	PK 710/23/7,62-V DG	56	12755.1	STL 970/18/5,08-H GN	159
12642.1	PK 700/22/5,00-H GN	43	12680.1	PK 710/24/7,62-V GN	56	12756.1	STL 970/19/5,08-H GN	159
12642.4	PK 700/22/5,00-H DG	43	12680.4	PK 710/24/7,62-V DG	56	12757.1	STL 970/20/5,08-H GN	159
12643.1	PK 700/23/5,00-H GN	43	12681.1	PKD 750/13/5,00-V GN	45	12758.1	STL 970/21/5,08-H GN	159
12643.4	PK 700/23/5,00-H DG	43	12681.4	PKD 750/13/5,00-V DG	45	12759.1	STL 970/22/5,08-H GN	159
12644.1	PK 700/24/5,00-H GN	43	12682.1	PKD 750/14/5,00-V GN	45	12760.1	STL 970/23/5,08-H GN	159
12644.4	PK 700/24/5,00-H DG	43	12682.4	PKD 750/14/5,00-V DG	45	12761.1	STL 970/24/5,08-H GN	159
12645.1	PK 700/13/5,08-H GN	50	12683.1	PKD 750/15/5,00-V GN	45	12789.1	PKD 750/13/5,08-V GN	51
12645.4	PK 700/13/5,08-H DG	50	12683.4	PKD 750/15/5,00-V DG	45	12789.4	PKD 750/13/5,08-V DG	51
12646.1	PK 700/14/5,08-H GN	50	12684.1	PKD 750/16/5,00-V GN	45	12790.1	PKD 750/14/5,08-V GN	51
12646.4	PK 700/14/5,08-H DG	50	12684.4	PKD 750/16/5,00-V DG	45	12790.4	PKD 750/14/5,08-V DG	51
12647.1	PK 700/15/5,08-H GN	50	12685.1	PKD 750/17/5,00-V GN	45	12791.1	PKD 750/15/5,08-V GN	51
12647.4	PK 700/15/5,08-H DG	50	12685.4	PKD 750/17/5,00-V DG	45	12791.4	PKD 750/15/5,08-V DG	51
12648.1	PK 700/16/5,08-H GN	50	12686.1	PKD 750/18/5,00-V GN	45	12792.1	PKD 750/16/5,08-V GN	51
12648.4	PK 700/16/5,08-H DG	50	12686.4	PKD 750/18/5,00-V DG	45	12792.4	PKD 750/16/5,08-V DG	51
12649.1	PK 700/17/5,08-H GN	50	12687.1	PKD 750/19/5,00-V GN	45	12793.1	PKD 750/17/5,08-V GN	51
12649.4	PK 700/17/5,08-H DG	50	12687.4	PKD 750/19/5,00-V DG	45	12793.4	PKD 750/17/5,08-V DG	51
12650.1	PK 700/18/5,08-H GN	50	12688.1	PKD 750/20/5,00-V GN	45	12794.1	PKD 750/18/5,08-V GN	51
12650.4	PK 700/18/5,08-H DG	50	12688.4	PKD 750/20/5,00-V DG	45	12794.4	PKD 750/18/5,08-V DG	51
12651.1	PK 700/19/5,08-H GN	50	12689.1	PKD 750/21/5,00-V GN	45	12795.1	PKD 750/19/5,08-V GN	51
12651.4	PK 700/19/5,08-H DG	50	12689.4	PKD 750/21/5,00-V DG	45	12795.4	PKD 750/19/5,08-V DG	51
12652.1	PK 700/20/5,08-H GN	50	12690.1	PKD 750/22/5,00-V GN	45	12796.1	PKD 750/20/5,08-V GN	51
12652.4	PK 700/20/5,08-H DG	50	12690.4	PKD 750/22/5,00-V DG	45	12796.4	PKD 750/20/5,08-V DG	51
12653.1	PK 700/21/5,08-H GN	50	12691.1	PKD 750/23/5,00-V GN	45	12797.1	PKD 750/21/5,08-V GN	51
12653.4	PK 700/21/5,08-H DG	50	12691.4	PKD 750/23/5,00-V DG	45	12797.4	PKD 750/21/5,08-V DG	51
12654.1	PK 700/22/5,08-H GN	50	12692.1	PKD 750/24/5,00-V GN	45	12798.1	PKD 750/22/5,08-V GN	51
12654.4	PK 700/22/5,08-H DG	50	12692.4	PKD 750/24/5,00-V DG	45	12798.4	PKD 750/22/5,08-V DG	51
12655.1	PK 700/23/5,08-H GN	50	12701.1	PKD 790/14/5,00-V GN	46	12799.1	PKD 750/23/5,08-V GN	51
12655.4	PK 700/23/5,08-H DG	50	12701.4	PKD 790/14/5,00-V DG	46	12799.4	PKD 750/23/5,08-V DG	51
12656.1	PK 700/24/5,08-H GN	50	12702.1	PKD 790/16/5,00-V GN	46	12800.1	PKD 750/24/5,08-V GN	51
12656.4	PK 700/24/5,08-H DG	50	12702.4	PKD 790/16/5,00-V DG	46	12800.4	PKD 750/24/5,08-V DG	51
12657.1	PK 710/13/7,50-V GN	55	12703.1	PKD 790/18/5,00-V GN	46	12855.1	PK 590/2/5,00 GN	69
12657.4	PK 710/13/7,50-V DG	55	12703.4	PKD 790/18/5,00-V DG	46	12856.1	PK 590/3/5,00 GN	69
12658.1	PK 710/14/7,50-V GN	55	12704.1	PKD 790/20/5,00-V GN	46	12857.1	PK 590/4/5,00 GN	69
12658.4	PK 710/14/7,50-V DG	55	12704.4	PKD 790/20/5,00-V DG	46	12858.1	PK 590/5/5,00 GN	69
12659.1	PK 710/15/7,50-V GN	55	12705.1	PKD 790/22/5,00-V GN	46	12859.1	PK 590/6/5,00 GN	69
12659.4	PK 710/15/7,50-V DG	55	12705.4	PKD 790/22/5,00-V DG	46	12860.1	PK 590/7/5,00 GN	69
12660.1	PK 710/16/7,50-V GN	55	12706.1	PKD 790/24/5,00-V GN	46	12861.1	PK 590/8/5,00 GN	69
12660.4	PK 710/16/7,50-V DG	55	12706.4	PKD 790/24/5,00-V DG	46	12862.1	PK 590/9/5,00 GN	69
12661.1	PK 710/17/7,50-V GN	55	12708.1	PKH 793/14/5,00-V GN	46	12863.1	PK 590/10/5,00 GN	69
12661.4	PK 710/17/7,50-V DG	55	12708.4	PKH 793/14/5,00-V DG	46	12864.1	PK 590/11/5,00 GN	69
12662.1	PK 710/18/7,50-V GN	55	12709.1	PKH 793/16/5,00-V GN	46	12865.1	PK 590/12/5,00 GN	69
12662.4	PK 710/18/7,50-V DG	55	12709.4	PKH 793/16/5,00-V DG	46	12866.1	PK 590/13/5,00 GN	69
12663.1	PK 710/19/7,50-V GN	55	12710.1	PKH 793/18/5,00-V GN	46	12867.1	PK 590/14/5,00 GN	69
12663.4	PK 710/19/7,50-V DG	55	12710.4	PKH 793/18/5,00-V DG	46	12868.1	PK 590/15/5,00 GN	69
12664.1	PK 710/20/7,50-V GN	55	12711.1	PKH 793/20/5,00-V GN	46	12869.1	PK 590/16/5,00 GN	69
12664.4	PK 710/20/7,50-V DG	55	12711.4	PKH 793/20/5,00-V DG	46	12870.1	PK 590/17/5,00 GN	69
12665.1	PK 710/21/7,50-V GN	55	12712.1	PKH 793/22/5,00-V GN	46	12871.1	PK 590/18/5,00 GN	69
12665.4	PK 710/21/7,50-V DG	55	12712.4	PKH 793/22/5,00-V DG	46	12872.1	PK 590/19/5,00 GN	69
12666.1	PK 710/22/7,50-V GN	55	12713.1	PKH 793/24/5,00-V GN	46	12873.1	PK 590/20/5,00 GN	69
12666.4	PK 710/22/7,50-V DG	55	12713.4	PKH 793/24/5,00-V DG	46	12874.1	PK 590/21/5,00 GN	69
12667.1	PK 710/23/7,50-V GN	55	12714.1	PKZ 840/13/6,35-V GN	53	12875.1	PK 590/22/5,00 GN	69
12667.4	PK 710/23/7,50-V DG	55	12715.1	PKZ 840/14/6,35-V GN	53	12876.1	PK 590/23/5,00 GN	69
12668.1	PK 710/24/7,50-V GN	55	12716.1	PKZ 840/15/6,35-V GN	53	12877.1	PK 590/24/5,00 GN	69
12668.4	PK 710/24/7,50-V DG	55	12717.1	PKZ 840/16/6,35-V GN	53	12878.1	PKZ 602/2/3,81-V GN	40
12669.1	PK 710/13/7,62-V GN	56	12726.1	PKZ 841/13/9,52-V GN	57	12879.1	PKZ 602/3/3,81-V GN	40
12669.4	PK 710/13/7,62-V DG	56	12727.1	PKZ 841/14/9,52-V GN	57	12880.1	PKZ 602/4/3,81-V GN	40
12670.1	PK 710/14/7,62-V GN	56	12728.1	PKZ 841/15/9,52-V GN	57	12881.1	PKZ 602/5/3,81-V GN	40
12670.4	PK 710/14/7,62-V DG	56	12729.1	PKZ 841/16/9,52-V GN	57	12882.1	PKZ 602/6/3,81-V GN	40
12671.1	PK 710/15/7,62-V GN	56	12738.1	STL 970/13/5,08-V GN	159	12883.1	PKZ 602/7/3,81-V GN	40
12671.4	PK 710/15/7,62-V DG	56	12739.1	STL 970/14/5,08-V GN	159	12884.1	PKZ 602/8/3,81-V GN	40
12672.1	PK 710/16/7,62-V GN	56	12740.1	STL 970/15/5,08-V GN	159	12885.1	PKZ 602/9/3,81-V GN	40
12672.4	PK 710/16/7,62-V DG	56	12741.1	STL 970/16/5,08-V GN	159	12886.1	PKZ 602/10/3,81-V GN	40
12673.1	PK 710/17/7,62-V GN	56	12742.1	STL 970/17/5,08-V GN	159	12887.1	PKZ 602/11/3,81-V GN	40
12673.4	PK 710/17/7,62-V DG	56	12743.1	STL 970/18/5,08-V GN	159	12888.1	PKZ 602/12/3,81-V GN	40
12674.1	PK 710/18/7,62-V GN	56	12744.1	STL 970/19/5,08-V GN	159	12889.1	PKZ 602/13/3,81-V GN	40
12674.4	PK 710/18/7,62-V DG	56	12745.1	STL 970/20/5,08-V GN	159	12890.1	PKZ 602/14/3,81-V GN	40
12675.1	PK 710/19/7,62-V GN	56	12746.1	STL 970/21/5,08-V GN	159	12891.1	PKZ 602/15/3,81-V GN	40
12675.4	PK 710/19/7,62-V DG	56	12747.1	STL 970/22/5,08-V GN	159	12892.1	PKZ 602/16/3,81-V GN	40
12676.1	PK 710/20/7,62-V GN	56	12748.1	STL 970/23/5,08-V GN	159	12924.1	PKDZ 770/2/5,08-V GN	52

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
12925.1	PKDZ 770/3/5,08-V GN	52	13099.0	PBK 4100/16/5,00 LG	16	13190.1	PK-TS/17/5,08/15 GN	170
12926.1	PKDZ 770/4/5,08-V GN	52	13100.0	PBK 4100/17/5,00 LG	16	13191.1	PK-TS/18/5,08/15 GN	170
12927.1	PKDZ 770/5/5,08-V GN	52	13101.0	PBK 4100/18/5,00 LG	16	13192.1	PK-TS/19/5,08/15 GN	170
12928.1	PKDZ 770/6/5,08-V GN	52	13102.0	PBK 4100/19/5,00 LG	16	13193.1	PK-TS/20/5,08/15 GN	170
12929.1	PKDZ 770/7/5,08-V GN	52	13103.0	PBK 4100/20/5,00 LG	16	13194.1	PK-TS/21/5,08/15 GN	170
12930.1	PKDZ 770/8/5,08-V GN	52	13104.0	PBK 4100/21/5,00 LG	16	13195.1	PK-TS/22/5,08/15 GN	170
12931.1	PKDZ 770/9/5,08-V GN	52	13105.0	PBK 4100/22/5,00 LG	16	13196.1	PK-TS/23/5,08/15 GN	170
12932.1	PKDZ 770/10/5,08-V GN	52	13106.0	PBK 4100/23/5,00 LG	16	13197.1	PK-TS/24/5,08/15 GN	170
12933.1	PKDZ 770/11/5,08-V GN	52	13107.0	PBK 4100/24/5,00 LG	16	13198.1	STL 950/11/5,08-V-F GN	155
12934.1	PKDZ 770/12/5,08-V GN	52	13108.0	PBK 4101/2/5,00-KD LG	16	13199.1	STL 950/12/5,08-V-F GN	155
12935.1	PKDZ 770/13/5,08-V GN	52	13109.0	PBK 4101/3/5,00-KD LG	16	13200.1	STL 950/13/5,08-V-F GN	155
12936.1	PKDZ 770/14/5,08-V GN	52	13110.0	PBK 4101/4/5,00-KD LG	16	13201.1	STL 950/14/5,08-V-F GN	155
12937.1	PKDZ 770/15/5,08-V GN	52	13111.0	PBK 4101/5/5,00-KD LG	16	13202.1	STL 950/15/5,08-V-F GN	155
12938.1	PKDZ 770/16/5,08-V GN	52	13112.0	PBK 4101/6/5,00-KD LG	16	13203.1	STL 950/16/5,08-V-F GN	155
12939.1	PKDZ 770/17/5,08-V GN	52	13113.0	PBK 4101/7/5,00-KD LG	16	13204.1	STL 950/17/5,08-V-F GN	155
12940.1	PKDZ 770/18/5,08-V GN	52	13114.0	PBK 4101/8/5,00-KD LG	16	13205.1	STL 950/18/5,08-V-F GN	155
12941.1	PKDZ 770/19/5,08-V GN	52	13115.0	PBK 4101/9/5,00-KD LG	16	13206.1	STL 950/19/5,08-V-F GN	155
12942.1	PKDZ 770/20/5,08-V GN	52	13116.0	PBK 4101/10/5,00-KD LG	16	13207.1	STL 950/20/5,08-V-F GN	155
12943.1	PKDZ 770/21/5,08-V GN	52	13117.0	PBK 4101/11/5,00-KD LG	16	13208.1	STL 950/21/5,08-V-F GN	155
12944.1	PKDZ 770/22/5,08-V GN	52	13118.0	PBK 4101/12/5,00-KD LG	16	13209.1	STL 950/22/5,08-V-F GN	155
12945.1	PKDZ 770/23/5,08-V GN	52	13119.0	PBK 4101/13/5,00-KD LG	16	13210.1	STL 950/23/5,08-V-F GN	155
12946.1	PKDZ 770/24/5,08-V GN	52	13120.0	PBK 4101/14/5,00-KD LG	16	13211.1	STL 950/24/5,08-V-F GN	155
13			13121.0	PBK 4101/15/5,00-KD LG	16	13212.1	PKB 950/11/5,08-F GN	112
13039.1	PKBZ 1551/2/3,81 GN	106	13122.0	PBK 4101/16/5,00-KD LG	16	13213.1	PKB 950/12/5,08-F GN	112
13040.1	PKBZ 1551/3/3,81 GN	106	13123.0	PBK 4101/17/5,00-KD LG	16	13214.1	PKB 950/13/5,08-F GN	112
13041.1	PKBZ 1551/4/3,81 GN	106	13124.0	PBK 4101/18/5,00-KD LG	16	13215.1	PKB 950/14/5,08-F GN	112
13042.1	PKBZ 1551/5/3,81 GN	106	13125.0	PBK 4101/19/5,00-KD LG	16	13216.1	PKB 950/15/5,08-F GN	112
13043.1	PKBZ 1551/6/3,81 GN	106	13126.0	PBK 4101/20/5,00-KD LG	16	13217.1	PKB 950/16/5,08-F GN	112
13044.1	PKBZ 1551/7/3,81 GN	106	13127.0	PBK 4101/21/5,00-KD LG	16	13218.1	PKB 950/17/5,08-F GN	112
13045.1	PKBZ 1551/8/3,81 GN	106	13128.0	PBK 4101/22/5,00-KD LG	16	13219.1	PKB 950/18/5,08-F GN	112
13046.1	PKBZ 1551/9/3,81 GN	106	13129.0	PBK 4101/23/5,00-KD LG	16	13220.1	PKB 950/19/5,08-F GN	112
13047.1	PKBZ 1551/10/3,81 GN	106	13130.0	PBK 4101/24/5,00-KD LG	16	13221.1	PKB 950/20/5,08-F GN	112
13048.1	PKBZ 1551/11/3,81 GN	106	13131.1	PBKZ 4301/2/5,08-KD GN	18	13222.1	PKB 950/21/5,08-F GN	112
13049.1	PKBZ 1551/12/3,81 GN	106	13132.1	PBKZ 4301/3/5,08-KD GN	18	13223.1	PKB 950/22/5,08-F GN	112
13050.1	PKBZ 1551/13/3,81 GN	106	13133.1	PBKZ 4301/4/5,08-KD GN	18	13226.1	PKB 950/11/5,00-F GN	108
13051.1	PKBZ 1551/14/3,81 GN	106	13134.1	PBKZ 4301/5/5,08-KD GN	18	13227.1	PKB 950/12/5,00-F GN	108
13052.1	PKBZ 1551/15/3,81 GN	106	13135.1	PBKZ 4301/6/5,08-KD GN	18	13228.1	PKB 950/13/5,00-F GN	108
13053.1	PKBZ 1551/16/3,81 GN	106	13136.1	PBKZ 4301/7/5,08-KD GN	18	13229.1	PKB 950/14/5,00-F GN	108
13054.1	PKBZ 1551/17/3,81 GN	106	13137.1	PBKZ 4301/8/5,08-KD GN	18	13230.1	PKB 950/15/5,00-F GN	108
13055.1	PKBZ 1551/18/3,81 GN	106	13163.1	PKD 790/3/5,00-V GN	46	13231.1	PKB 950/16/5,00-F GN	108
13056.1	PKBZ 1551/19/3,81 GN	106	13163.4	PKD 790/3/5,00-V DG	46	13232.1	PKB 950/17/5,00-F GN	108
13057.1	PKBZ 1551/20/3,81 GN	106	13164.1	PKD 790/5/5,00-V GN	46	13233.1	PKB 950/18/5,00-F GN	108
13062.1	PKBZ 1552/2/3,81 GN	107	13164.4	PKD 790/5/5,00-V DG	46	13234.1	PKB 950/19/5,00-F GN	108
13063.1	PKBZ 1552/3/3,81 GN	107	13165.1	PKD 790/7/5,00-V GN	46	13235.1	PKB 950/20/5,00-F GN	108
13064.1	PKBZ 1552/4/3,81 GN	107	13165.4	PKD 790/7/5,00-V DG	46	13236.1	PKB 950/21/5,00-F GN	108
13065.1	PKBZ 1552/5/3,81 GN	107	13166.1	PKD 790/9/5,00-V GN	46	13237.1	PKB 950/22/5,00-F GN	108
13066.1	PKBZ 1552/6/3,81 GN	107	13166.4	PKD 790/9/5,00-V DG	46	13238.1	PKB 950/23/5,00-F GN	108
13067.1	PKBZ 1552/7/3,81 GN	107	13167.1	PKD 790/11/5,00-V GN	46	13239.1	PKB 950/24/5,00-F GN	108
13068.1	PKBZ 1552/8/3,81 GN	107	13167.4	PKD 790/11/5,00-V DG	46	13240.1	STL 950/11/5,00-V-F GN	147
13069.1	PKBZ 1552/9/3,81 GN	107	13168.1	PKD 790/13/5,00-V GN	46	13241.1	STL 950/12/5,00-V-F GN	147
13070.1	PKBZ 1552/10/3,81 GN	107	13168.4	PKD 790/13/5,00-V DG	46	13242.1	STL 950/13/5,00-V-F GN	147
13071.1	PKBZ 1552/11/3,81 GN	107	13169.1	PKD 790/15/5,00-V GN	46	13243.1	STL 950/14/5,00-V-F GN	147
13072.1	PKBZ 1552/12/3,81 GN	107	13169.4	PKD 790/15/5,00-V DG	46	13244.1	STL 950/15/5,00-V-F GN	147
13073.1	PKBZ 1552/13/3,81 GN	107	13170.1	PKD 790/17/5,00-V GN	46	13245.1	STL 950/16/5,00-V-F GN	147
13074.1	PKBZ 1552/14/3,81 GN	107	13170.4	PKD 790/17/5,00-V DG	46	13246.1	STL 950/17/5,00-V-F GN	147
13075.1	PKBZ 1552/15/3,81 GN	107	13171.1	PKD 790/19/5,00-V GN	46	13247.1	STL 950/18/5,00-V-F GN	147
13076.1	PKBZ 1552/16/3,81 GN	107	13171.4	PKD 790/19/5,00-V DG	46	13248.1	STL 950/19/5,00-V-F GN	147
13077.1	PKBZ 1552/17/3,81 GN	107	13172.1	PKD 790/21/5,00-V GN	46	13249.1	STL 950/20/5,00-V-F GN	147
13078.1	PKBZ 1552/18/3,81 GN	107	13172.4	PKD 790/21/5,00-V DG	46	13250.1	STL 950/21/5,00-V-F GN	147
13079.1	PKBZ 1552/19/3,81 GN	107	13173.1	PKD 790/23/5,00-V GN	46	13251.1	STL 950/22/5,00-V-F GN	147
13080.1	PKBZ 1552/20/3,81 GN	107	13173.4	PKD 790/23/5,00-V DG	46	13252.1	STL 950/23/5,00-V-F GN	147
13085.0	PBK 4100/2/5,00 LG	16	13175.1	PK-TS/2/5,08/15 GN	170	13253.1	STL 950/24/5,00-V-F GN	147
13086.0	PBK 4100/3/5,00 LG	16	13176.1	PK-TS/3/5,08/15 GN	170	13254.1	STL 950/11/5,00-H-F GN	147
13087.0	PBK 4100/4/5,00 LG	16	13177.1	PK-TS/4/5,08/15 GN	170	13255.1	STL 950/12/5,00-H-F GN	147
13088.0	PBK 4100/5/5,00 LG	16	13178.1	PK-TS/5/5,08/15 GN	170	13256.1	STL 950/13/5,00-H-F GN	147
13089.0	PBK 4100/6/5,00 LG	16	13179.1	PK-TS/6/5,08/15 GN	170	13257.1	STL 950/14/5,00-H-F GN	147
13090.0	PBK 4100/7/5,00 LG	16	13180.1	PK-TS/7/5,08/15 GN	170	13258.1	STL 950/15/5,00-H-F GN	147
13091.0	PBK 4100/8/5,00 LG	16	13181.1	PK-TS/8/5,08/15 GN	170	13259.1	STL 950/16/5,00-H-F GN	147
13092.0	PBK 4100/9/5,00 LG	16	13182.1	PK-TS/9/5,08/15 GN	170	13260.1	STL 950/17/5,00-H-F GN	147
13093.0	PBK 4100/10/5,00 LG	16	13183.1	PK-TS/10/5,08/15 GN	170	13261.1	STL 950/18/5,00-H-F GN	147
13094.0	PBK 4100/11/5,00 LG	16	13184.1	PK-TS/11/5,08/15 GN	170	13262.1	STL 950/19/5,00-H-F GN	147
13095.0	PBK 4100/12/5,00 LG	16	13185.1	PK-TS/12/5,08/15 GN	170	13263.1	STL 950/20/5,00-H-F GN	147
13096.0	PBK 4100/13/5,00 LG	16	13186.1	PK-TS/13/5,08/15 GN	170	13264.1	STL 950/21/5,00-H-F GN	147
13097.0	PBK 4100/14/5,00 LG	16	13187.1	PK-TS/14/5,08/15 GN	170	13265.1	STL 950/22/5,00-H-F GN	147
13098.0	PBK 4100/15/5,00 LG	16	13188.1	PK-TS/15/5,08/15 GN	170	13266.1	STL 950/23/5,00-H-F GN	147
			13189.1	PK-TS/16/5,08/15 GN	170	13267.1	STL 950/24/5,00-H-F GN	147

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
13268.1	STL 950/11/5,08-H-F GN	155	13342.1	PZK 3750/10/5,00 GN	29	13421.1	PZK 3750/17/5,08-VP GN	31
13269.1	STL 950/12/5,08-H-F GN	155	13343.1	PZK 3750/11/5,00 GN	29	13422.1	PZK 3750/18/5,08-VP GN	31
13270.1	STL 950/13/5,08-H-F GN	155	13344.1	PZK 3750/12/5,00 GN	29	13423.1	PZK 3750/19/5,08-VP GN	31
13271.1	STL 950/14/5,08-H-F GN	155	13345.1	PZK 3750/13/5,00 GN	29	13424.1	PZK 3750/20/5,08-VP GN	31
13272.1	STL 950/15/5,08-H-F GN	155	13346.1	PZK 3750/14/5,00 GN	29	13425.1	PZK 3750/21/5,08-VP GN	31
13273.1	STL 950/16/5,08-H-F GN	155	13347.1	PZK 3750/15/5,00 GN	29	13426.1	PZK 3750/22/5,08-VP GN	31
13274.1	STL 950/17/5,08-H-F GN	155	13348.1	PZK 3750/16/5,00 GN	29	13427.1	PZK 3750/23/5,08-VP GN	31
13275.1	STL 950/18/5,08-H-F GN	155	13349.1	PZK 3750/17/5,00 GN	29	13428.1	PZK 3750/24/5,08-VP GN	31
13276.1	STL 950/19/5,08-H-F GN	155	13350.1	PZK 3750/18/5,00 GN	29	13429.1	STL 970/2/5,08-V-G GN	160
13277.1	STL 950/20/5,08-H-F GN	155	13351.1	PZK 3750/19/5,00 GN	29	13430.1	STL 970/3/5,08-V-G GN	160
13278.1	STL 950/21/5,08-H-F GN	155	13352.1	PZK 3750/20/5,00 GN	29	13431.1	STL 970/4/5,08-V-G GN	160
13279.1	STL 950/22/5,08-H-F GN	155	13353.1	PZK 3750/21/5,00 GN	29	13432.1	STL 970/5/5,08-V-G GN	160
13280.1	STL 950/23/5,08-H-F GN	155	13354.1	PZK 3750/22/5,00 GN	29	13433.1	STL 970/6/5,08-V-G GN	160
13281.1	STL 950/24/5,08-H-F GN	155	13355.1	PZK 3750/23/5,00 GN	29	13434.1	STL 970/7/5,08-V-G GN	160
13283.8	AD/PK YE	43-46, 50, 51, 55, 56, 61, 185	13356.1	PZK 3750/24/5,00 GN	29	13435.1	STL 970/8/5,08-V-G GN	160
13284.1	BLS-STL GN	159-164, 185	13358.1	PZK 3750/2/5,08 GN	31	13436.1	STL 970/9/5,08-V-G GN	160
13286.0	PBK 4291/2/3,50-KD LG	14	13359.1	PZK 3750/3/5,08 GN	31	13437.1	STL 970/10/5,08-V-G GN	160
13287.0	PBK 4291/3/3,50-KD LG	14	13360.1	PZK 3750/4/5,08 GN	31	13438.1	STL 970/11/5,08-V-G GN	160
13288.0	PBK 4291/4/3,50-KD LG	14	13361.1	PZK 3750/5/5,08 GN	31	13439.1	STL 970/12/5,08-V-G GN	160
13289.0	PBK 4291/5/3,50-KD LG	14	13362.1	PZK 3750/6/5,08 GN	31	13440.1	STL 970/2/5,08-H-G GN	160
13290.0	PBK 4291/6/3,50-KD LG	14	13363.1	PZK 3750/7/5,08 GN	31	13441.1	STL 970/3/5,08-H-G GN	160
13291.0	PBK 4291/7/3,50-KD LG	14	13364.1	PZK 3750/8/5,08 GN	31	13442.1	STL 970/4/5,08-H-G GN	160
13292.0	PBK 4291/8/3,50-KD LG	14	13365.1	PZK 3750/9/5,08 GN	31	13443.1	STL 970/5/5,08-H-G GN	160
13293.0	PBK 4291/9/3,50-KD LG	14	13366.1	PZK 3750/10/5,08 GN	31	13444.1	STL 970/6/5,08-H-G GN	160
13294.0	PBK 4291/10/3,50-KD LG	14	13367.1	PZK 3750/11/5,08 GN	31	13445.1	STL 970/7/5,08-H-G GN	160
13295.0	PBK 4291/11/3,50-KD LG	14	13368.1	PZK 3750/12/5,08 GN	31	13446.1	STL 970/8/5,08-H-G GN	160
13296.0	PBK 4291/12/3,50-KD LG	14	13369.1	PZK 3750/13/5,08 GN	31	13447.1	STL 970/9/5,08-H-G GN	160
13297.0	PBK 4291/13/3,50-KD LG	14	13370.1	PZK 3750/14/5,08 GN	31	13448.1	STL 970/10/5,08-H-G GN	160
13298.0	PBK 4291/14/3,50-KD LG	14	13371.1	PZK 3750/15/5,08 GN	31	13449.1	STL 970/11/5,08-H-G GN	160
13299.0	PBK 4291/15/3,50-KD LG	14	13372.1	PZK 3750/16/5,08 GN	31	13450.1	STL 970/12/5,08-H-G GN	160
13300.0	PBK 4291/16/3,50-KD LG	14	13373.1	PZK 3750/17/5,08 GN	31	13451.1	STL 970/2/5,08-V-F GN	161
13301.0	PBK 4291/17/3,50-KD LG	14	13374.1	PZK 3750/18/5,08 GN	31	13452.1	STL 970/3/5,08-V-F GN	161
13302.0	PBK 4291/18/3,50-KD LG	14	13375.1	PZK 3750/19/5,08 GN	31	13453.1	STL 970/4/5,08-V-F GN	161
13303.0	PBK 4291/19/3,50-KD LG	14	13376.1	PZK 3750/20/5,08 GN	31	13454.1	STL 970/5/5,08-V-F GN	161
13304.0	PBK 4291/20/3,50-KD LG	14	13377.1	PZK 3750/21/5,08 GN	31	13455.1	STL 970/6/5,08-V-F GN	161
13305.0	PBK 4291/21/3,50-KD LG	14	13378.1	PZK 3750/22/5,08 GN	31	13456.1	STL 970/7/5,08-V-F GN	161
13306.0	PBK 4291/22/3,50-KD LG	14	13379.1	PZK 3750/23/5,08 GN	31	13457.1	STL 970/8/5,08-V-F GN	161
13307.0	PBK 4291/23/3,50-KD LG	14	13380.1	PZK 3750/24/5,08 GN	31	13458.1	STL 970/9/5,08-V-F GN	161
13308.0	PBK 4291/24/3,50-KD LG	14	13382.1	PZK 3750/2/5,00-VP GN	29	13459.1	STL 970/10/5,08-V-F GN	161
13310.0	PBK 4291/2/3,50-KDVP LG	14	13383.1	PZK 3750/3/5,00-VP GN	29	13460.1	STL 970/11/5,08-V-F GN	161
13311.0	PBK 4291/3/3,50-KDVP LG	14	13384.1	PZK 3750/4/5,00-VP GN	29	13461.1	STL 970/12/5,08-V-F GN	161
13312.0	PBK 4291/4/3,50-KDVP LG	14	13385.1	PZK 3750/5/5,00-VP GN	29	13462.1	STL 970/2/5,08-H-F GN	161
13313.0	PBK 4291/5/3,50-KDVP LG	14	13386.1	PZK 3750/6/5,00-VP GN	29	13463.1	STL 970/3/5,08-H-F GN	161
13314.0	PBK 4291/6/3,50-KDVP LG	14	13387.1	PZK 3750/7/5,00-VP GN	29	13464.1	STL 970/4/5,08-H-F GN	161
13315.0	PBK 4291/7/3,50-KDVP LG	14	13388.1	PZK 3750/8/5,00-VP GN	29	13465.1	STL 970/5/5,08-H-F GN	161
13316.0	PBK 4291/8/3,50-KDVP LG	14	13389.1	PZK 3750/9/5,00-VP GN	29	13466.1	STL 970/6/5,08-H-F GN	161
13317.0	PBK 4291/9/3,50-KDVP LG	14	13390.1	PZK 3750/10/5,00-VP GN	29	13467.1	STL 970/7/5,08-H-F GN	161
13318.0	PBK 4291/10/3,50-KDVP LG	14	13391.1	PZK 3750/11/5,00-VP GN	29	13468.1	STL 970/8/5,08-H-F GN	161
13319.0	PBK 4291/11/3,50-KDVP LG	14	13392.1	PZK 3750/12/5,00-VP GN	29	13469.1	STL 970/9/5,08-H-F GN	161
13320.0	PBK 4291/12/3,50-KDVP LG	14	13393.1	PZK 3750/13/5,00-VP GN	29	13470.1	STL 970/10/5,08-H-F GN	161
13321.0	PBK 4291/13/3,50-KDVP LG	14	13394.1	PZK 3750/14/5,00-VP GN	29	13471.1	STL 970/11/5,08-H-F GN	161
13322.0	PBK 4291/14/3,50-KDVP LG	14	13395.1	PZK 3750/15/5,00-VP GN	29	13472.1	STL 970/12/5,08-H-F GN	161
13323.0	PBK 4291/15/3,50-KDVP LG	14	13396.1	PZK 3750/16/5,00-VP GN	29	13473.1	PK 500/13/10,00-V GN	78
13324.0	PBK 4291/16/3,50-KDVP LG	14	13397.1	PZK 3750/17/5,00-VP GN	29	13473.4	PK 500/13/10,00-V DG	78
13325.0	PBK 4291/17/3,50-KDVP LG	14	13398.1	PZK 3750/18/5,00-VP GN	29	13474.1	PK 500/14/10,00-V GN	78
13326.0	PBK 4291/18/3,50-KDVP LG	14	13399.1	PZK 3750/19/5,00-VP GN	29	13474.4	PK 500/14/10,00-V DG	78
13327.0	PBK 4291/19/3,50-KDVP LG	14	13400.1	PZK 3750/20/5,00-VP GN	29	13475.1	PK 500/15/10,00-V GN	78
13328.0	PBK 4291/20/3,50-KDVP LG	14	13401.1	PZK 3750/21/5,00-VP GN	29	13475.4	PK 500/15/10,00-V DG	78
13329.0	PBK 4291/21/3,50-KDVP LG	14	13402.1	PZK 3750/22/5,00-VP GN	29	13476.1	PK 500/16/10,00-V GN	78
13330.0	PBK 4291/22/3,50-KDVP LG	14	13403.1	PZK 3750/23/5,00-VP GN	29	13476.4	PK 500/16/10,00-V DG	78
13331.0	PBK 4291/23/3,50-KDVP LG	14	13404.1	PZK 3750/24/5,00-VP GN	29	13477.1	PK 500/17/10,00-V GN	78
13332.0	PBK 4291/24/3,50-KDVP LG	14	13406.1	PZK 3750/2/5,08-VP GN	31	13477.4	PK 500/17/10,00-V DG	78
13334.1	PZK 3750/2/5,00 GN	29	13407.1	PZK 3750/3/5,08-VP GN	31	13478.1	PK 500/18/10,00-V GN	78
13335.1	PZK 3750/3/5,00 GN	29	13408.1	PZK 3750/4/5,08-VP GN	31	13478.4	PK 500/18/10,00-V DG	78
13336.1	PZK 3750/4/5,00 GN	29	13409.1	PZK 3750/5/5,08-VP GN	31	13479.1	PK 500/19/10,00-V GN	78
13337.1	PZK 3750/5/5,00 GN	29	13410.1	PZK 3750/6/5,08-VP GN	31	13479.4	PK 500/19/10,00-V DG	78
13338.1	PZK 3750/6/5,00 GN	29	13411.1	PZK 3750/7/5,08-VP GN	31	13480.1	PK 500/20/10,00-V GN	78
13339.1	PZK 3750/7/5,00 GN	29	13412.1	PZK 3750/8/5,08-VP GN	31	13480.4	PK 500/20/10,00-V DG	78
13340.1	PZK 3750/8/5,00 GN	29	13413.1	PZK 3750/9/5,08-VP GN	31	13481.1	PK 500/21/10,00-V GN	78
13341.1	PZK 3750/9/5,00 GN	29	13414.1	PZK 3750/10/5,08-VP GN	31	13481.4	PK 500/21/10,00-V DG	78
			13415.1	PZK 3750/11/5,08-VP GN	31	13482.1	PK 500/22/10,00-V GN	78
			13416.1	PZK 3750/12/5,08-VP GN	31	13482.4	PK 500/22/10,00-V DG	78
			13417.1	PZK 3750/13/5,08-VP GN	31	13483.1	PK 500/23/10,00-V GN	78
			13418.1	PZK 3750/14/5,08-VP GN	31	13483.4	PK 500/23/10,00-V DG	78
			13419.1	PZK 3750/15/5,08-VP GN	31	13484.1	PK 500/24/10,00-V GN	78
			13420.1	PZK 3750/16/5,08-VP GN	31	13484.4	PK 500/24/10,00-V DG	78

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
13485.1	PK 500/13/10,00-H GN	78	13525.4	PK 500/17/10,16-V DG	82	13571.1	PK 250/15/10,16-V GN	59
13485.4	PK 500/13/10,00-H DG	78	13526.1	PK 500/18/10,16-V GN	82	13572.1	PK 250/16/10,16-V GN	59
13486.1	PK 500/14/10,00-H GN	78	13526.4	PK 500/18/10,16-V DG	82	13573.1	PK 250/17/10,16-V GN	59
13486.4	PK 500/14/10,00-H DG	78	13527.1	PK 500/19/10,16-V GN	82	13574.1	PK 250/18/10,16-V GN	59
13487.1	PK 500/15/10,00-H GN	78	13527.4	PK 500/19/10,16-V DG	82	13575.1	PK 250/19/10,16-V GN	59
13487.4	PK 500/15/10,00-H DG	78	13528.1	PK 500/20/10,16-V GN	82	13576.1	PK 250/20/10,16-V GN	59
13488.1	PK 500/16/10,00-H GN	78	13528.4	PK 500/20/10,16-V DG	82	13577.1	PK 250/21/10,16-V GN	59
13488.4	PK 500/16/10,00-H DG	78	13529.1	PK 500/21/10,16-V GN	82	13578.1	PK 250/22/10,16-V GN	59
13489.1	PK 500/17/10,00-H GN	78	13529.4	PK 500/21/10,16-V DG	82	13579.1	PK 250/23/10,16-V GN	59
13489.4	PK 500/17/10,00-H DG	78	13530.1	PK 500/22/10,16-V GN	82	13580.1	PK 250/24/10,16-V GN	59
13490.1	PK 500/18/10,00-H GN	78	13530.4	PK 500/22/10,16-V DG	82	13581.1	PK 300/13/10,16 GN	60
13490.4	PK 500/18/10,00-H DG	78	13531.1	PK 500/23/10,16-V GN	82	13581.4	PK 300/13/10,16 DG	60
13491.1	PK 500/19/10,00-H GN	78	13531.4	PK 500/23/10,16-V DG	82	13582.1	PK 300/14/10,16 GN	60
13491.4	PK 500/19/10,00-H DG	78	13532.1	PK 500/24/10,16-V GN	82	13582.4	PK 300/14/10,16 DG	60
13492.1	PK 500/20/10,00-H GN	78	13532.4	PK 500/24/10,16-V DG	82	13583.1	PK 300/15/10,16 GN	60
13492.4	PK 500/20/10,00-H DG	78	13533.1	PK 500/13/10,16-H GN	82	13583.4	PK 300/15/10,16 DG	60
13493.1	PK 500/21/10,00-H GN	78	13533.4	PK 500/13/10,16-H DG	82	13584.1	PK 300/16/10,16 GN	60
13493.4	PK 500/21/10,00-H DG	78	13534.1	PK 500/14/10,16-H GN	82	13584.4	PK 300/16/10,16 DG	60
13494.1	PK 500/22/10,00-H GN	78	13534.4	PK 500/14/10,16-H DG	82	13585.1	PK 300/17/10,16 GN	60
13494.4	PK 500/22/10,00-H DG	78	13535.1	PK 500/15/10,16-H GN	82	13585.4	PK 300/17/10,16 DG	60
13495.1	PK 500/23/10,00-H GN	78	13535.4	PK 500/15/10,16-H DG	82	13586.1	PK 300/18/10,16 GN	60
13495.4	PK 500/23/10,00-H DG	78	13536.1	PK 500/16/10,16-H GN	82	13586.4	PK 300/18/10,16 DG	60
13496.1	PK 500/24/10,00-H GN	78	13536.4	PK 500/16/10,16-H DG	82	13587.1	PK 300/19/10,16 GN	60
13496.4	PK 500/24/10,00-H DG	78	13537.1	PK 500/17/10,16-H GN	82	13587.4	PK 300/19/10,16 DG	60
13497.1	PK 100/13/10,00-V GN	79	13537.4	PK 500/17/10,16-H DG	82	13588.1	PK 300/20/10,16 GN	60
13497.4	PK 100/13/10,00-V DG	79	13538.1	PK 500/18/10,16-H GN	82	13588.4	PK 300/20/10,16 DG	60
13498.1	PK 100/14/10,00-V GN	79	13538.4	PK 500/18/10,16-H DG	82	13589.1	PK 300/21/10,16 GN	60
13498.4	PK 100/14/10,00-V DG	79	13539.1	PK 500/19/10,16-H GN	82	13589.4	PK 300/21/10,16 DG	60
13499.1	PK 100/15/10,00-V GN	79	13539.4	PK 500/19/10,16-H DG	82	13590.1	PK 300/22/10,16 GN	60
13499.4	PK 100/15/10,00-V DG	79	13540.1	PK 500/20/10,16-H GN	82	13590.4	PK 300/22/10,16 DG	60
13500.1	PK 100/16/10,00-V GN	79	13540.4	PK 500/20/10,16-H DG	82	13591.1	PK 300/23/10,16 GN	60
13500.4	PK 100/16/10,00-V DG	79	13541.1	PK 500/21/10,16-H GN	82	13591.4	PK 300/23/10,16 DG	60
13501.1	PK 100/17/10,00-V GN	79	13541.4	PK 500/21/10,16-H DG	82	13592.1	PK 300/24/10,16 GN	60
13501.4	PK 100/17/10,00-V DG	79	13542.1	PK 500/22/10,16-H GN	82	13592.4	PK 300/24/10,16 DG	60
13502.1	PK 100/18/10,00-V GN	79	13542.4	PK 500/22/10,16-H DG	82	13593.1	PK 350/13/10,16-V GN	59
13502.4	PK 100/18/10,00-V DG	79	13543.1	PK 500/23/10,16-H GN	82	13594.1	PK 350/14/10,16-V GN	59
13503.1	PK 100/19/10,00-V GN	79	13543.4	PK 500/23/10,16-H DG	82	13595.1	PK 350/15/10,16-V GN	59
13503.4	PK 100/19/10,00-V DG	79	13544.1	PK 500/24/10,16-H GN	82	13596.1	PK 350/16/10,16-V GN	59
13504.1	PK 100/20/10,00-V GN	79	13544.4	PK 500/24/10,16-H DG	82	13597.1	PK 350/17/10,16-V GN	59
13504.4	PK 100/20/10,00-V DG	79	13545.1	PK 300/13/10,00 GN	58	13598.1	PK 350/18/10,16-V GN	59
13505.1	PK 100/21/10,00-V GN	79	13545.4	PK 300/13/10,00 DG	58	13599.1	PK 350/19/10,16-V GN	59
13505.4	PK 100/21/10,00-V DG	79	13546.1	PK 300/14/10,00 GN	58	13600.1	PK 350/20/10,16-V GN	59
13506.1	PK 100/22/10,00-V GN	79	13546.4	PK 300/14/10,00 DG	58	13601.1	PK 350/21/10,16-V GN	59
13506.4	PK 100/22/10,00-V DG	79	13547.1	PK 300/15/10,00 GN	58	13602.1	PK 350/22/10,16-V GN	59
13507.1	PK 100/23/10,00-V GN	79	13547.4	PK 300/15/10,00 DG	58	13603.1	PK 350/23/10,16-V GN	59
13507.4	PK 100/23/10,00-V DG	79	13548.1	PK 300/16/10,00 GN	58	13604.1	PK 350/24/10,16-V GN	59
13508.1	PK 100/24/10,00-V GN	79	13548.4	PK 300/16/10,00 DG	58	13605.1	PK 360/2/7,50-H GN	54
13508.4	PK 100/24/10,00-V DG	79	13549.1	PK 300/17/10,00 GN	58	13605.4	PK 360/2/7,50-H DG	54
13509.1	PK 100/13/10,00-H GN	80	13550.1	PK 300/18/10,00 GN	58	13606.1	PK 360/3/7,50-H GN	54
13510.1	PK 100/14/10,00-H GN	80	13550.4	PK 300/18/10,00 DG	58	13606.4	PK 360/3/7,50-H DG	54
13511.1	PK 100/15/10,00-H GN	80	13551.1	PK 300/19/10,00 GN	58	13607.1	PK 360/4/7,50-H GN	54
13512.1	PK 100/16/10,00-H GN	80	13551.4	PK 300/19/10,00 DG	58	13607.4	PK 360/4/7,50-H DG	54
13513.1	PK 100/17/10,00-H GN	80	13552.1	PK 300/20/10,00 GN	58	13608.1	PK 360/5/7,50-H GN	54
13514.1	PK 100/18/10,00-H GN	80	13552.4	PK 300/20/10,00 DG	58	13608.4	PK 360/5/7,50-H DG	54
13514.4	PK 100/18/10,00-H DG	80	13553.1	PK 300/21/10,00 GN	58	13609.1	PK 360/6/7,50-H GN	54
13515.1	PK 100/19/10,00-H GN	80	13553.4	PK 300/21/10,00 DG	58	13609.4	PK 360/6/7,50-H DG	54
13515.4	PK 100/19/10,00-H DG	80	13554.1	PK 300/22/10,00 GN	58	13610.1	PK 360/7/7,50-H GN	54
13516.1	PK 100/20/10,00-H GN	80	13554.4	PK 300/22/10,00 DG	58	13610.4	PK 360/7/7,50-H DG	54
13516.4	PK 100/20/10,00-H DG	80	13555.1	PK 300/23/10,00 GN	58	13611.1	PK 360/8/7,50-H GN	54
13517.1	PK 100/21/10,00-H GN	80	13555.4	PK 300/23/10,00 DG	58	13611.4	PK 360/8/7,50-H DG	54
13517.4	PK 100/21/10,00-H DG	80	13556.1	PK 300/24/10,00 GN	58	13612.1	PK 360/9/7,50-H GN	54
13518.1	PK 100/22/10,00-H GN	80	13556.4	PK 300/24/10,00 DG	58	13612.4	PK 360/9/7,50-H DG	54
13518.4	PK 100/22/10,00-H DG	80	13557.1	PK 350/13/10,00-V GN	58	13613.1	PK 360/10/7,50-H GN	54
13519.1	PK 100/23/10,00-H GN	80	13558.1	PK 350/14/10,00-V GN	58	13613.4	PK 360/10/7,50-H DG	54
13519.4	PK 100/23/10,00-H DG	80	13559.1	PK 350/15/10,00-V GN	58	13614.1	PK 360/11/7,50-H GN	54
13520.1	PK 100/24/10,00-H GN	80	13560.1	PK 350/16/10,00-V GN	58	13614.4	PK 360/11/7,50-H DG	54
13520.4	PK 100/24/10,00-H DG	80	13561.1	PK 350/17/10,00-V GN	58	13615.1	PK 360/12/7,50-H GN	54
13521.1	PK 500/13/10,16-V GN	82	13562.1	PK 350/18/10,00-V GN	58	13615.4	PK 360/12/7,50-H DG	54
13521.4	PK 500/13/10,16-V DG	82	13563.1	PK 350/19/10,00-V GN	58	13616.1	PK 360/13/7,50-H GN	54
13522.1	PK 500/14/10,16-V GN	82	13564.1	PK 350/20/10,00-V GN	58	13616.4	PK 360/13/7,50-H DG	54
13522.4	PK 500/14/10,16-V DG	82	13565.1	PK 350/21/10,00-V GN	58	13617.1	PK 360/14/7,50-H GN	54
13523.1	PK 500/15/10,16-V GN	82	13566.1	PK 350/22/10,00-V GN	58	13617.4	PK 360/14/7,50-H DG	54
13523.4	PK 500/15/10,16-V DG	82	13567.1	PK 350/23/10,00-V GN	58	13618.1	PK 360/15/7,50-H GN	54
13524.1	PK 500/16/10,16-V GN	82	13568.1	PK 350/24/10,00-V GN	58	13618.4	PK 360/15/7,50-H DG	54
13524.4	PK 500/16/10,16-V DG	82	13569.1	PK 250/13/10,16-V GN	59	13619.1	PK 360/16/7,50-H GN	54
13525.1	PK 500/17/10,16-V GN	82	13570.1	PK 250/14/10,16-V GN	59	13619.4	PK 360/16/7,50-H DG	54

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
13620.1	PK 360/17/7,50-H GN	54	13666.4	STL 130/18/5,08-V BK	131	13742.1	PKB 1550/10/3,81-F GN	105
13620.4	PK 360/17/7,50-H DG	54	13667.4	STL 130/19/5,08-V BK	131	13743.1	PKB 1550/11/3,81-F GN	105
13621.1	PK 360/18/7,50-H GN	54	13668.4	STL 130/20/5,08-V BK	131	13744.1	PKB 1550/12/3,81-F GN	105
13621.4	PK 360/18/7,50-H DG	54	13669.4	STL 130/21/5,08-V BK	131	13745.1	PKB 1550/13/3,81-F GN	105
13622.1	PK 360/19/7,50-H GN	54	13670.4	STL 130/22/5,08-V BK	131	13746.1	PKB 1550/14/3,81-F GN	105
13622.4	PK 360/19/7,50-H DG	54	13671.4	STL 130/23/5,08-V BK	131	13747.1	PKB 1550/15/3,81-F GN	105
13623.1	PK 360/20/7,50-H GN	54	13672.4	STL 130/24/5,08-V BK	131	13748.1	PKB 1550/16/3,81-F GN	105
13623.4	PK 360/20/7,50-H DG	54	13673.4	STL 140/2/5,08-H BK	131	13749.1	PKB 1550/17/3,81-F GN	105
13624.1	PK 360/21/7,50-H GN	54	13674.4	STL 140/3/5,08-H BK	131	13750.1	PKB 1550/18/3,81-F GN	105
13624.4	PK 360/21/7,50-H DG	54	13675.4	STL 140/4/5,08-H BK	131	13751.1	PKB 1550/19/3,81-F GN	105
13625.1	PK 360/22/7,50-H GN	54	13676.4	STL 140/5/5,08-H BK	131	13752.1	PKB 1550/20/3,81-F GN	105
13625.4	PK 360/22/7,50-H DG	54	13677.4	STL 140/6/5,08-H BK	131	13753.1	STL 1550/2/3,50-V-F GN	135
13626.1	PK 360/23/7,50-H GN	54	13678.4	STL 140/7/5,08-H BK	131	13754.1	STL 1550/3/3,50-V-F GN	135
13626.4	PK 360/23/7,50-H DG	54	13679.4	STL 140/8/5,08-H BK	131	13755.1	STL 1550/4/3,50-V-F GN	135
13627.1	PK 360/24/7,50-H GN	54	13680.4	STL 140/9/5,08-H BK	131	13756.1	STL 1550/5/3,50-V-F GN	135
13627.4	PK 360/24/7,50-H DG	54	13681.4	STL 140/10/5,08-H BK	131	13757.1	STL 1550/6/3,50-V-F GN	135
13628.1	PKB 130/2/5,08-BL GN	124	13682.4	STL 140/11/5,08-H BK	131	13758.1	STL 1550/7/3,50-V-F GN	135
13628.4	PKB 130/2/5,08-BL DG	124	13683.4	STL 140/12/5,08-H BK	131	13759.1	STL 1550/8/3,50-V-F GN	135
13629.1	PKB 130/3/5,08-BL GN	124	13684.4	STL 140/13/5,08-H BK	131	13760.1	STL 1550/9/3,50-V-F GN	135
13629.4	PKB 130/3/5,08-BL DG	124	13685.4	STL 140/14/5,08-H BK	131	13761.1	STL 1550/10/3,50-V-F GN	135
13630.1	PKB 130/4/5,08-BL GN	124	13686.4	STL 140/15/5,08-H BK	131	13762.1	STL 1550/11/3,50-V-F GN	135
13630.4	PKB 130/4/5,08-BL DG	124	13687.4	STL 140/16/5,08-H BK	131	13763.1	STL 1550/12/3,50-V-F GN	135
13631.1	PKB 130/5/5,08-BL GN	124	13688.4	STL 140/17/5,08-H BK	131	13764.1	STL 1550/13/3,50-V-F GN	135
13631.4	PKB 130/5/5,08-BL DG	124	13689.4	STL 140/18/5,08-H BK	131	13765.1	STL 1550/14/3,50-V-F GN	135
13632.1	PKB 130/6/5,08-BL GN	124	13690.4	STL 140/19/5,08-H BK	131	13766.1	STL 1550/15/3,50-V-F GN	135
13632.4	PKB 130/6/5,08-BL DG	124	13691.4	STL 140/20/5,08-H BK	131	13767.1	STL 1550/16/3,50-V-F GN	135
13633.1	PKB 130/7/5,08-BL GN	124	13692.4	STL 140/21/5,08-H BK	131	13768.1	STL 1550/17/3,50-V-F GN	135
13633.4	PKB 130/7/5,08-BL DG	124	13693.4	STL 140/22/5,08-H BK	131	13769.1	STL 1550/18/3,50-V-F GN	135
13634.1	PKB 130/8/5,08-BL GN	124	13694.4	STL 140/23/5,08-H BK	131	13770.1	STL 1550/2/3,50-H-F GN	135
13634.4	PKB 130/8/5,08-BL DG	124	13695.4	STL 140/24/5,08-H BK	131	13771.1	STL 1550/3/3,50-H-F GN	135
13635.1	PKB 130/9/5,08-BL GN	124	13696.4	STL 130/2/10,16-V BK	133	13772.1	STL 1550/4/3,50-H-F GN	135
13635.4	PKB 130/9/5,08-BL DG	124	13697.4	STL 130/3/10,16-V BK	133	13773.1	STL 1550/5/3,50-H-F GN	135
13636.1	PKB 130/10/5,08-BL GN	124	13698.4	STL 130/4/10,16-V BK	133	13774.1	STL 1550/6/3,50-H-F GN	135
13636.4	PKB 130/10/5,08-BL DG	124	13699.4	STL 130/5/10,16-V BK	133	13775.1	STL 1550/7/3,50-H-F GN	135
13637.1	PKB 130/11/5,08-BL GN	124	13700.4	STL 130/6/10,16-V BK	133	13776.1	STL 1550/8/3,50-H-F GN	135
13637.4	PKB 130/11/5,08-BL DG	124	13701.4	STL 130/7/10,16-V BK	133	13777.1	STL 1550/9/3,50-H-F GN	135
13638.1	PKB 130/12/5,08-BL GN	124	13702.4	STL 130/8/10,16-V BK	133	13778.1	STL 1550/10/3,50-H-F GN	135
13638.4	PKB 130/12/5,08-BL DG	124	13703.4	STL 130/9/10,16-V BK	133	13779.1	STL 1550/11/3,50-H-F GN	135
13639.1	PKB 130/13/5,08-BL GN	124	13704.4	STL 130/10/10,16-V BK	133	13780.1	STL 1550/12/3,50-H-F GN	135
13639.4	PKB 130/13/5,08-BL DG	124	13705.4	STL 130/11/10,16-V BK	133	13781.1	STL 1550/13/3,50-H-F GN	135
13640.1	PKB 130/14/5,08-BL GN	124	13706.4	STL 130/12/10,16-V BK	133	13782.1	STL 1550/14/3,50-H-F GN	135
13640.4	PKB 130/14/5,08-BL DG	124	13707.1	PKB 950/23/5,08-F GN	112	13783.1	STL 1550/15/3,50-H-F GN	135
13641.1	PKB 130/15/5,08-BL GN	124	13708.1	PKB 950/24/5,08-F GN	112	13784.1	STL 1550/16/3,50-H-F GN	135
13641.4	PKB 130/15/5,08-BL DG	124	13709.1	STL 1550/17/3,81-V-G GN	139	13785.1	STL 1550/17/3,50-H-F GN	135
13642.1	PKB 130/16/5,08-BL GN	124	13710.1	STL 1550/18/3,81-V-G GN	139	13786.1	STL 1550/18/3,50-H-F GN	135
13642.4	PKB 130/16/5,08-BL DG	124	13711.1	STL 1550/19/3,81-V-G GN	139	13787.1	STL 1550/2/3,81-V-F GN	140
13643.1	PKB 130/2/10,16-BL GN	126	13712.1	STL 1550/20/3,81-V-G GN	139	13788.1	STL 1550/3/3,81-V-F GN	140
13643.4	PKB 130/2/10,16-BL DG	126	13713.1	STL 1550/17/3,81-H-G GN	139	13789.1	STL 1550/4/3,81-V-F GN	140
13644.1	PKB 130/3/10,16-BL GN	126	13714.1	STL 1550/18/3,81-H-G GN	139	13790.1	STL 1550/5/3,81-V-F GN	140
13644.4	PKB 130/3/10,16-BL DG	126	13715.1	STL 1550/19/3,81-H-G GN	139	13791.1	STL 1550/6/3,81-V-F GN	140
13645.1	PKB 130/4/10,16-BL GN	126	13716.1	STL 1550/20/3,81-H-G GN	139	13792.1	STL 1550/7/3,81-V-F GN	140
13645.4	PKB 130/4/10,16-BL DG	126	13717.1	PKB 1550/2/3,50-F GN	102	13793.1	STL 1550/8/3,81-V-F GN	140
13646.1	PKB 130/5/10,16-BL GN	126	13718.1	PKB 1550/3/3,50-F GN	102	13794.1	STL 1550/9/3,81-V-F GN	140
13646.4	PKB 130/5/10,16-BL DG	126	13719.1	PKB 1550/4/3,50-F GN	102	13795.1	STL 1550/10/3,81-V-F GN	140
13647.1	PKB 130/6/10,16-BL GN	126	13720.1	PKB 1550/5/3,50-F GN	102	13796.1	STL 1550/11/3,81-V-F GN	140
13647.4	PKB 130/6/10,16-BL DG	126	13721.1	PKB 1550/6/3,50-F GN	102	13797.1	STL 1550/12/3,81-V-F GN	140
13648.1	PKB 130/7/10,16-BL GN	126	13722.1	PKB 1550/7/3,50-F GN	102	13798.1	STL 1550/13/3,81-V-F GN	140
13648.4	PKB 130/7/10,16-BL DG	126	13723.1	PKB 1550/8/3,50-F GN	102	13799.1	STL 1550/14/3,81-V-F GN	140
13649.1	PKB 130/8/10,16-BL GN	126	13724.1	PKB 1550/9/3,50-F GN	102	13800.1	STL 1550/15/3,81-V-F GN	140
13649.4	PKB 130/8/10,16-BL DG	126	13725.1	PKB 1550/10/3,50-F GN	102	13801.1	STL 1550/16/3,81-V-F GN	140
13650.4	STL 130/2/5,08-V BK	131	13726.1	PKB 1550/11/3,50-F GN	102	13802.1	STL 1550/17/3,81-V-F GN	140
13651.4	STL 130/3/5,08-V BK	131	13727.1	PKB 1550/12/3,50-F GN	102	13803.1	STL 1550/18/3,81-V-F GN	140
13652.4	STL 130/4/5,08-V BK	131	13728.1	PKB 1550/13/3,50-F GN	102	13804.1	STL 1550/19/3,81-V-F GN	140
13653.4	STL 130/5/5,08-V BK	131	13729.1	PKB 1550/14/3,50-F GN	102	13805.1	STL 1550/20/3,81-V-F GN	140
13654.4	STL 130/6/5,08-V BK	131	13730.1	PKB 1550/15/3,50-F GN	102	13806.1	STL 1550/2/3,81-H-F GN	140
13655.4	STL 130/7/5,08-V BK	131	13731.1	PKB 1550/16/3,50-F GN	102	13807.1	STL 1550/3/3,81-H-F GN	140
13656.4	STL 130/8/5,08-V BK	131	13732.1	PKB 1550/17/3,50-F GN	102	13808.1	STL 1550/4/3,81-H-F GN	140
13657.4	STL 130/9/5,08-V BK	131	13733.1	PKB 1550/18/3,50-F GN	102	13809.1	STL 1550/5/3,81-H-F GN	140
13658.4	STL 130/10/5,08-V BK	131	13734.1	PKB 1550/2/3,81-F GN	105	13810.1	STL 1550/6/3,81-H-F GN	140
13659.4	STL 130/11/5,08-V BK	131	13735.1	PKB 1550/3/3,81-F GN	105	13811.1	STL 1550/7/3,81-H-F GN	140
13660.4	STL 130/12/5,08-V BK	131	13736.1	PKB 1550/4/3,81-F GN	105	13812.1	STL 1550/8/3,81-H-F GN	140
13661.4	STL 130/13/5,08-V BK	131	13737.1	PKB 1550/5/3,81-F GN	105	13813.1	STL 1550/9/3,81-H-F GN	140
13662.4	STL 130/14/5,08-V BK	131	13738.1	PKB 1550/6/3,81-F GN	105	13814.1	STL 1550/10/3,81-H-F GN	140
13663.4	STL 130/15/5,08-V BK	131	13739.1	PKB 1550/7/3,81-F GN	105	13815.1	STL 1550/11/3,81-H-F GN	140
13664.4	STL 130/16/5,08-V BK	131	13740.1	PKB 1550/8/3,81-F GN	105	13816.1	STL 1550/12/3,81-H-F GN	140
13665.4	STL 130/17/5,08-V BK	131	13741.1	PKB 1550/9/3,81-F GN	105	13817.1	STL 1550/13/3,81-H-F GN	140

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
13818.1	STL 1550/14/3,81-H-F GN	140	13923.4	STL 1350/14/3,50-V BK	128	14008.1	PFBZ 4551/10/3,81-KD GN	91
13819.1	STL 1550/15/3,81-H-F GN	140	13924.4	STL 1350/15/3,50-V BK	128	14009.1	PFBZ 4551/11/3,81-KD GN	91
13820.1	STL 1550/16/3,81-H-F GN	140	13925.4	STL 1350/16/3,50-V BK	128	14010.1	PFBZ 4551/12/3,81-KD GN	91
13821.1	STL 1550/17/3,81-H-F GN	140	13926.4	STL 1350/17/3,50-V BK	128	14011.1	PFBZ 4551/13/3,81-KD GN	91
13822.1	STL 1550/18/3,81-H-F GN	140	13927.4	STL 1350/18/3,50-V BK	128	14012.1	PFBZ 4551/14/3,81-KD GN	91
13823.1	STL 1550/19/3,81-H-F GN	140	13928.4	STL 1350/19/3,50-V BK	128	14013.1	PFBZ 4551/15/3,81-KD GN	91
13824.1	STL 1550/20/3,81-H-F GN	140	13929.4	STL 1350/20/3,50-V BK	128	14014.1	PFBZ 4551/16/3,81-KD GN	91
13825.1	PK-TS/2/5,08/15-F GN	171	13930.4	STL 1350/21/3,50-V BK	128	14015.1	PFBZ 4551/2/3,81-FKD GN	91
13826.1	PK-TS/3/5,08/15-F GN	171	13931.4	STL 1350/22/3,50-V BK	128	14016.1	PFBZ 4551/3/3,81-FKD GN	91
13827.1	PK-TS/4/5,08/15-F GN	171	13932.4	STL 1350/23/3,50-V BK	128	14017.1	PFBZ 4551/4/3,81-FKD GN	91
13828.1	PK-TS/5/5,08/15-F GN	171	13933.4	STL 1350/24/3,50-V BK	128	14018.1	PFBZ 4551/5/3,81-FKD GN	91
13829.1	PK-TS/6/5,08/15-F GN	171	13934.4	STL 1350/2/3,50-H BK	128	14019.1	PFBZ 4551/6/3,81-FKD GN	91
13830.1	PK-TS/7/5,08/15-F GN	171	13935.4	STL 1350/3/3,50-H BK	128	14020.1	PFBZ 4551/7/3,81-FKD GN	91
13831.1	PK-TS/8/5,08/15-F GN	171	13936.4	STL 1350/4/3,50-H BK	128	14021.1	PFBZ 4551/8/3,81-FKD GN	91
13832.1	PK-TS/9/5,08/15-F GN	171	13937.4	STL 1350/5/3,50-H BK	128	14022.1	PFBZ 4551/9/3,81-FKD GN	91
13833.1	PK-TS/10/5,08/15-F GN	171	13938.4	STL 1350/6/3,50-H BK	128	14023.1	PFBZ 4551/10/3,81-FKD GN	91
13834.1	PK-TS/11/5,08/15-F GN	171	13939.4	STL 1350/7/3,50-H BK	128	14024.1	PFBZ 4551/11/3,81-FKD GN	91
13835.1	PK-TS/12/5,08/15-F GN	171	13940.4	STL 1350/8/3,50-H BK	128	14025.1	PFBZ 4551/12/3,81-FKD GN	91
13836.1	PK-TS/13/5,08/15-F GN	171	13941.4	STL 1350/9/3,50-H BK	128	14026.1	PFBZ 4551/13/3,81-FKD GN	91
13837.1	PK-TS/14/5,08/15-F GN	171	13942.4	STL 1350/10/3,50-H BK	128	14027.1	PFBZ 4551/14/3,81-FKD GN	91
13838.1	PK-TS/15/5,08/15-F GN	171	13943.4	STL 1350/11/3,50-H BK	128	14028.1	PFBZ 4551/15/3,81-FKD GN	91
13839.1	PK-TS/16/5,08/15-F GN	171	13944.4	STL 1350/12/3,50-H BK	128	14029.1	PFBZ 4551/16/3,81-FKD GN	91
13840.1	PK-TS/17/5,08/15-F GN	171	13945.4	STL 1350/13/3,50-H BK	128	14060.1	PKBZ 1551/2/3,81-F GN	106
13841.1	PK-TS/18/5,08/15-F GN	171	13946.4	STL 1350/14/3,50-H BK	128	14061.1	PKBZ 1551/3/3,81-F GN	106
13842.1	PK-TS/19/5,08/15-F GN	171	13947.4	STL 1350/15/3,50-H BK	128	14062.1	PKBZ 1551/4/3,81-F GN	106
13843.1	PK-TS/20/5,08/15-F GN	171	13948.4	STL 1350/16/3,50-H BK	128	14063.1	PKBZ 1551/5/3,81-F GN	106
13844.1	PK-TS/21/5,08/15-F GN	171	13949.4	STL 1350/17/3,50-H BK	128	14064.1	PKBZ 1551/6/3,81-F GN	106
13845.1	PK-TS/22/5,08/15-F GN	171	13950.4	STL 1350/18/3,50-H BK	128	14065.1	PKBZ 1551/7/3,81-F GN	106
13846.1	PK-TS/23/5,08/15-F GN	171	13951.4	STL 1350/19/3,50-H BK	128	14066.1	PKBZ 1551/8/3,81-F GN	106
13847.1	PK-TS/24/5,08/15-F GN	171	13952.4	STL 1350/20/3,50-H BK	128	14067.1	PKBZ 1551/9/3,81-F GN	106
13848.1	PK-TS/2/5,08-F GN	171	13953.4	STL 1350/21/3,50-H BK	128	14068.1	PKBZ 1551/10/3,81-F GN	106
13849.1	PK-TS/3/5,08-F GN	171	13954.4	STL 1350/22/3,50-H BK	128	14069.1	PKBZ 1551/11/3,81-F GN	106
13850.1	PK-TS/4/5,08-F GN	171	13955.4	STL 1350/23/3,50-H BK	128	14070.1	PKBZ 1551/12/3,81-F GN	106
13851.1	PK-TS/5/5,08-F GN	171	13956.4	STL 1350/24/3,50-H BK	128	14071.1	PKBZ 1551/13/3,81-F GN	106
13852.1	PK-TS/6/5,08-F GN	171	13957.1	PKB 4350/2/3,50 GN	97	14072.1	PKBZ 1551/14/3,81-F GN	106
13853.1	PK-TS/7/5,08-F GN	171	13958.1	PKB 4350/3/3,50 GN	97	14073.1	PKBZ 1551/15/3,81-F GN	106
13854.1	PK-TS/8/5,08-F GN	171	13959.1	PKB 4350/4/3,50 GN	97	14074.1	PKBZ 1551/16/3,81-F GN	106
13855.1	PK-TS/9/5,08-F GN	171	13960.1	PKB 4350/5/3,50 GN	97	14075.1	PKBZ 1551/17/3,81-F GN	106
13856.1	PK-TS/10/5,08-F GN	171	13961.1	PKB 4350/6/3,50 GN	97	14076.1	PKBZ 1551/18/3,81-F GN	106
13857.1	PK-TS/11/5,08-F GN	171	13962.1	PKB 4350/7/3,50 GN	97	14077.1	PKBZ 1551/19/3,81-F GN	106
13858.1	PK-TS/12/5,08-F GN	171	13963.1	PKB 4350/8/3,50 GN	97	14078.1	PKBZ 1551/20/3,81-F GN	106
13859.1	PK-TS/13/5,08-F GN	171	13964.1	PKB 4350/9/3,50 GN	97	14079.1	PKBZ 1552/2/3,81-F GN	107
13860.1	PK-TS/14/5,08-F GN	171	13965.1	PKB 4350/10/3,50 GN	97	14080.1	PKBZ 1552/3/3,81-F GN	107
13861.1	PK-TS/15/5,08-F GN	171	13966.1	PKB 4350/11/3,50 GN	97	14081.1	PKBZ 1552/4/3,81-F GN	107
13862.1	PK-TS/16/5,08-F GN	171	13967.1	PKB 4350/12/3,50 GN	97	14082.1	PKBZ 1552/5/3,81-F GN	107
13863.1	PK-TS/17/5,08-F GN	171	13968.1	PKB 4350/2/3,50-G GN	97	14083.1	PKBZ 1552/6/3,81-F GN	107
13864.1	PK-TS/18/5,08-F GN	171	13969.1	PKB 4350/3/3,50-G GN	97	14084.1	PKBZ 1552/7/3,81-F GN	107
13865.1	PK-TS/19/5,08-F GN	171	13970.1	PKB 4350/4/3,50-G GN	97	14085.1	PKBZ 1552/8/3,81-F GN	107
13866.1	PK-TS/20/5,08-F GN	171	13971.1	PKB 4350/5/3,50-G GN	97	14086.1	PKBZ 1552/9/3,81-F GN	107
13867.1	PK-TS/21/5,08-F GN	171	13972.1	PKB 4350/6/3,50-G GN	97	14087.1	PKBZ 1552/10/3,81-F GN	107
13868.1	PK-TS/22/5,08-F GN	171	13973.1	PKB 4350/7/3,50-G GN	97	14088.1	PKBZ 1552/11/3,81-F GN	107
13869.1	PK-TS/23/5,08-F GN	171	13974.1	PKB 4350/8/3,50-G GN	97	14089.1	PKBZ 1552/12/3,81-F GN	107
13870.1	PK-TS/24/5,08-F GN	171	13975.1	PKB 4350/9/3,50-G GN	97	14090.1	PKBZ 1552/13/3,81-F GN	107
13900.4	PKB 1350/2/3,50 DG	122	13976.1	PKB 4350/10/3,50-G GN	97	14091.1	PKBZ 1552/14/3,81-F GN	107
13901.4	PKB 1350/3/3,50 DG	122	13977.1	PKB 4350/11/3,50-G GN	97	14092.1	PKBZ 1552/15/3,81-F GN	107
13902.4	PKB 1350/4/3,50 DG	122	13978.1	PKB 4350/12/3,50-G GN	97	14093.1	PKBZ 1552/16/3,81-F GN	107
13903.4	PKB 1350/5/3,50 DG	122	13979.1	PKB 1550/19/3,50-F GN	102	14094.1	PKBZ 1552/17/3,81-F GN	107
13904.4	PKB 1350/6/3,50 DG	122	13980.1	PKB 1550/20/3,50-F GN	102	14095.1	PKBZ 1552/18/3,81-F GN	107
13905.4	PKB 1350/7/3,50 DG	122	13981.1	PKB 1550/17/3,81 GN	105	14096.1	PKBZ 1552/19/3,81-F GN	107
13906.4	PKB 1350/8/3,50 DG	122	13982.1	PKB 1550/18/3,81 GN	105	14097.1	PKBZ 1552/20/3,81-F GN	107
13907.4	PKB 1350/9/3,50 DG	122	13983.1	PKB 1550/19/3,81 GN	105	14100.1	PKZ 692/2/2,54-V GN	38
13908.4	PKB 1350/10/3,50 DG	122	13984.1	PKB 1550/20/3,81 GN	105	14101.1	PKZ 692/3/2,54-V GN	38
13909.4	PKB 1350/11/3,50 DG	122	13985.1	STL 1550/19/3,50-V-F GN	135	14102.1	PKZ 692/4/2,54-V GN	38
13910.4	PKB 1350/12/3,50 DG	122	13986.1	STL 1550/20/3,50-V-F GN	135	14103.1	PKZ 692/5/2,54-V GN	38
13911.4	STL 1350/2/3,50-V BK	128	13987.1	STL 1550/19/3,50-H-F GN	135	14104.1	PKZ 692/6/2,54-V GN	38
13912.4	STL 1350/3/3,50-V BK	128	13988.1	STL 1550/20/3,50-H-F GN	135	14105.1	PKZ 692/7/2,54-V GN	38
13913.4	STL 1350/4/3,50-V BK	128				14106.1	PKZ 692/8/2,54-V GN	38
13914.4	STL 1350/5/3,50-V BK	128				14107.1	PKZ 692/9/2,54-V GN	38
13915.4	STL 1350/6/3,50-V BK	128				14108.1	PKZ 692/10/2,54-V GN	38
13916.4	STL 1350/7/3,50-V BK	128				14109.1	PKZ 692/11/2,54-V GN	38
13917.4	STL 1350/8/3,50-V BK	128				14110.1	PKZ 692/12/2,54-V GN	38
13918.4	STL 1350/9/3,50-V BK	128				14111.1	PKZ 692/13/2,54-V GN	38
13919.4	STL 1350/10/3,50-V BK	128				14112.1	PKZ 692/14/2,54-V GN	38
13920.4	STL 1350/11/3,50-V BK	128				14113.1	PKZ 692/15/2,54-V GN	38
13921.4	STL 1350/12/3,50-V BK	128				14114.1	PKZ 692/16/2,54-V GN	38
13922.4	STL 1350/13/3,50-V BK	128				14115.1	PKZ 692/17/2,54-V GN	38

14

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
14116.1	PKZ 692/24/2,54-V GN	38	14196.1	IPKBZ 950/2/5,08 GN	114	14294.1	PKBZ 965/2/7,62-F GN	118
14117.1	PKZ 692/18/2,54-V GN	38	14197.1	IPKBZ 950/3/5,08 GN	114	14295.1	PKBZ 965/3/7,62-F GN	118
14118.1	PKZ 692/19/2,54-V GN	38	14198.1	IPKBZ 950/4/5,08 GN	114	14296.1	PKBZ 965/4/7,62-F GN	118
14119.1	PKZ 692/20/2,54-V GN	38	14199.1	IPKBZ 950/5/5,08 GN	114	14297.1	PKBZ 965/5/7,62-F GN	118
14120.1	PKZ 692/21/2,54-V GN	38	14200.1	IPKBZ 950/6/5,08 GN	114	14298.1	PKBZ 965/6/7,62-F GN	118
14121.1	PKZ 692/22/2,54-V GN	38	14201.1	IPKBZ 950/7/5,08 GN	114	14299.1	PKBZ 965/7/7,62-F GN	118
14122.1	PKZ 692/23/2,54-V GN	38	14202.1	IPKBZ 950/8/5,08 GN	114	14300.1	PKBZ 965/8/7,62-F GN	118
14123.1	PK 601/2/3,50-V GN	39	14203.1	IPKBZ 950/9/5,08 GN	114	14301.1	PKBZ 965/9/7,62-F GN	118
14124.1	PK 601/3/3,50-V GN	39	14204.1	IPKBZ 950/10/5,08 GN	114	14302.1	PKBZ 965/10/7,62-F GN	118
14125.1	PK 601/4/3,50-V GN	39	14205.1	IPKBZ 950/11/5,08 GN	114	14303.1	PKBZ 965/11/7,62-F GN	118
14126.1	PK 601/5/3,50-V GN	39	14206.1	IPKBZ 950/12/5,08 GN	114	14304.1	PKBZ 965/12/7,62-F GN	118
14127.1	PK 601/6/3,50-V GN	39	14207.1	IPKBZ 950/13/5,08 GN	114	14305.1	PKBZ 965/13/7,62-F GN	118
14128.1	PK 601/7/3,50-V GN	39	14208.1	IPKBZ 950/14/5,08 GN	114	14306.1	PKBZ 965/14/7,62-F GN	118
14129.1	PK 601/8/3,50-V GN	39	14209.1	IPKBZ 950/15/5,08 GN	114	14307.1	PKBZ 965/15/7,62-F GN	118
14130.1	PK 601/9/3,50-V GN	39	14210.1	IPKBZ 950/16/5,08 GN	114	14308.1	PKBZ 965/16/7,62-F GN	118
14131.1	PK 601/10/3,50-V GN	39	14211.1	IPKBZ 950/17/5,08 GN	114	14309.4	K4 RD	115, 116, 118, 120, 121, 158, 184
14132.1	PK 601/11/3,50-V GN	39	14212.1	IPKBZ 950/18/5,08 GN	114	14310.4	K5 RD	114, 184
14133.1	PK 601/12/3,50-V GN	39	14213.1	IPKBZ 950/19/5,08 GN	114	14311.1	PKBZ 1110/2/5,08-F GN	116
14134.1	PK 601/13/3,50-V GN	39	14214.1	IPKBZ 950/20/5,08 GN	114	14312.1	PKBZ 1110/3/5,08-F GN	116
14135.1	PK 601/14/3,50-V GN	39	14215.1	IPKBZ 950/21/5,08 GN	114	14313.1	PKBZ 1110/4/5,08-F GN	116
14136.1	PK 601/15/3,50-V GN	39	14216.1	IPKBZ 950/22/5,08 GN	114	14314.1	PKBZ 1110/5/5,08-F GN	116
14137.1	PK 601/16/3,50-V GN	39	14217.1	IPKBZ 950/23/5,08 GN	114	14315.1	PKBZ 1110/6/5,08-F GN	116
14138.1	PK 601/17/3,50-V GN	39	14218.1	IPKBZ 950/24/5,08 GN	114	14316.1	PKBZ 1110/7/5,08-F GN	116
14139.1	PK 601/18/3,50-V GN	39	14219.1	PKBZ 1100/2/5,08-F GN	115	14317.1	PKBZ 1110/8/5,08-F GN	116
14140.1	PK 601/19/3,50-V GN	39	14220.1	PKBZ 1100/3/5,08-F GN	115	14318.1	PKBZ 1110/9/5,08-F GN	116
14141.1	PK 601/20/3,50-V GN	39	14221.1	PKBZ 1100/4/5,08-F GN	115	14319.1	PKBZ 1110/10/5,08-F GN	116
14142.1	PK 601/21/3,50-V GN	39	14222.1	PKBZ 1100/5/5,08-F GN	115	14320.1	PKBZ 1110/11/5,08-F GN	116
14143.1	PK 601/22/3,50-V GN	39	14223.1	PKBZ 1100/6/5,08-F GN	115	14321.1	PKBZ 1110/12/5,08-F GN	116
14144.1	PK 601/23/3,50-V GN	39	14224.1	PKBZ 1100/7/5,08-F GN	115	14322.1	PKBZ 1110/13/5,08-F GN	116
14145.1	PK 601/24/3,50-V GN	39	14225.1	PKBZ 1100/8/5,08-F GN	115	14323.1	PKBZ 1110/14/5,08-F GN	116
14150.1	ISTLZ 950/2/5,08-H GN	158	14226.1	PKBZ 1100/9/5,08-F GN	115	14324.1	PKBZ 1110/15/5,08-F GN	116
14151.1	ISTLZ 950/3/5,08-H GN	158	14227.1	PKBZ 1100/10/5,08-F GN	115	14325.1	PKBZ 1110/16/5,08-F GN	116
14152.1	ISTLZ 950/4/5,08-H GN	158	14228.1	PKBZ 1100/11/5,08-F GN	115	14326.1	PKBZ 1110/17/5,08-F GN	116
14153.1	ISTLZ 950/5/5,08-H GN	158	14229.1	PKBZ 1100/12/5,08-F GN	115	14327.1	PKBZ 1110/18/5,08-F GN	116
14154.1	ISTLZ 950/6/5,08-H GN	158	14230.1	PKBZ 1100/13/5,08-F GN	115	14328.1	PKBZ 1110/19/5,08-F GN	116
14155.1	ISTLZ 950/7/5,08-H GN	158	14231.1	PKBZ 1100/14/5,08-F GN	115	14329.1	PKBZ 1110/20/5,08-F GN	116
14156.1	ISTLZ 950/8/5,08-H GN	158	14232.1	PKBZ 1100/15/5,08-F GN	115	14330.1	PKBZ 1110/21/5,08-F GN	116
14157.1	ISTLZ 950/9/5,08-H GN	158	14233.1	PKBZ 1100/16/5,08-F GN	115	14331.1	PKBZ 1110/22/5,08-F GN	116
14158.1	ISTLZ 950/10/5,08-H GN	158	14234.1	PKBZ 1100/17/5,08-F GN	115	14332.1	PKBZ 1110/23/5,08-F GN	116
14159.1	ISTLZ 950/11/5,08-H GN	158	14235.1	PKBZ 1100/18/5,08-F GN	115	14333.1	PKBZ 1110/24/5,08-F GN	116
14160.1	ISTLZ 950/12/5,08-H GN	158	14236.1	PKBZ 1100/19/5,08-F GN	115	14340.1	PBK 2,5/1/5,00-V GN	17
14161.1	ISTLZ 950/13/5,08-H GN	158	14237.1	PKBZ 1100/20/5,08-F GN	115	14341.1	PBK 2,5/1/5,00-V GN	17
14162.1	ISTLZ 950/14/5,08-H GN	158	14238.1	PKBZ 1100/21/5,08-F GN	115	14342.1	PBK 2,5/2/5,00-V GN	17
14163.1	ISTLZ 950/15/5,08-H GN	158	14239.1	PKBZ 1100/22/5,08-F GN	115	14343.1	PBK 2,5/3/5,00-V GN	17
14164.1	ISTLZ 950/16/5,08-H GN	158	14240.1	PKBZ 1100/23/5,08-F GN	115	14344.1	PBK 2,5/4/5,00-V GN	17
14165.1	ISTLZ 950/17/5,08-H GN	158	14241.1	PKBZ 1100/24/5,08-F GN	115	14345.1	PBK 2,5/5/5,00-V GN	17
14166.1	ISTLZ 950/18/5,08-H GN	158	14264.1	STLZ 965/2/7,62-H-F GN	164	14346.1	PBK 2,5/6/5,00-V GN	17
14167.1	ISTLZ 950/19/5,08-H GN	158	14265.1	STLZ 965/3/7,62-H-F GN	164	14347.1	PBK 2,5/7/5,00-V GN	17
14168.1	ISTLZ 950/20/5,08-H GN	158	14266.1	STLZ 965/4/7,62-H-F GN	164	14348.1	PBK 2,5/8/5,00-V GN	17
14169.1	ISTLZ 950/21/5,08-H GN	158	14267.1	STLZ 965/5/7,62-H-F GN	164	14349.1	PBK 2,5/9/5,00-V GN	17
14170.1	ISTLZ 950/22/5,08-H GN	158	14268.1	STLZ 965/6/7,62-H-F GN	164	14350.1	PBK 2,5/10/5,00-V GN	17
14171.1	ISTLZ 950/23/5,08-H GN	158	14269.1	STLZ 965/7/7,62-H-F GN	164	14351.1	PBK 2,5/11/5,00-V GN	17
14172.1	ISTLZ 950/24/5,08-H GN	158	14270.1	STLZ 965/8/7,62-H-F GN	164	14352.1	PBK 2,5/12/5,00-V GN	17
14173.1	ISTLZ 950/2/5,08-V GN	158	14271.1	STLZ 965/9/7,62-H-F GN	164	14360.1	PBK 2,5/1/5,00-H GN	17
14174.1	ISTLZ 950/3/5,08-V GN	158	14272.1	STLZ 965/10/7,62-H-F GN	164	14361.1	PBK 2,5/1/5,00-H GN	17
14175.1	ISTLZ 950/4/5,08-V GN	158	14273.1	STLZ 965/11/7,62-H-F GN	164	14362.1	PBK 2,5/2/5,00-H GN	17
14176.1	ISTLZ 950/5/5,08-V GN	158	14274.1	STLZ 965/12/7,62-H-F GN	164	14363.1	PBK 2,5/3/5,00-H GN	17
14177.1	ISTLZ 950/6/5,08-V GN	158	14275.1	STLZ 965/13/7,62-H-F GN	164	14364.1	PBK 2,5/4/5,00-H GN	17
14178.1	ISTLZ 950/7/5,08-V GN	158	14276.1	STLZ 965/14/7,62-H-F GN	164	14365.1	PBK 2,5/5/5,00-H GN	17
14179.1	ISTLZ 950/8/5,08-V GN	158	14277.1	STLZ 965/15/7,62-H-F GN	164	14366.1	PBK 2,5/6/5,00-H GN	17
14180.1	ISTLZ 950/9/5,08-V GN	158	14278.1	STLZ 965/16/7,62-H-F GN	164	14367.1	PBK 2,5/7/5,00-H GN	17
14181.1	ISTLZ 950/10/5,08-V GN	158	14279.1	STLZ 965/2/7,62-V-F GN	164	14368.1	PBK 2,5/8/5,00-H GN	17
14182.1	ISTLZ 950/11/5,08-V GN	158	14280.1	STLZ 965/3/7,62-V-F GN	164	14369.1	PBK 2,5/9/5,00-H GN	17
14183.1	ISTLZ 950/12/5,08-V GN	158	14281.1	STLZ 965/4/7,62-V-F GN	164	14370.1	PBK 2,5/10/5,00-H GN	17
14184.1	ISTLZ 950/13/5,08-V GN	158	14282.1	STLZ 965/5/7,62-V-F GN	164	14371.1	PBK 2,5/11/5,00-H GN	17
14185.1	ISTLZ 950/14/5,08-V GN	158	14283.1	STLZ 965/6/7,62-V-F GN	164	14372.1	PBK 2,5/12/5,00-H GN	17
14186.1	ISTLZ 950/15/5,08-V GN	158	14284.1	STLZ 965/7/7,62-V-F GN	164	14379.1	AP/PBK 2,5 GN	17, 19, 20
14187.1	ISTLZ 950/16/5,08-V GN	158	14285.1	STLZ 965/8/7,62-V-F GN	164	14380.1	PBK 2,5/1/7,50-V GN	19
14188.1	ISTLZ 950/17/5,08-V GN	158	14286.1	STLZ 965/9/7,62-V-F GN	164	14381.1	PBK 2,5/1/7,50-V GN	19
14189.1	ISTLZ 950/18/5,08-V GN	158	14287.1	STLZ 965/10/7,62-V-F GN	164			
14190.1	ISTLZ 950/19/5,08-V GN	158	14288.1	STLZ 965/11/7,62-V-F GN	164			
14191.1	ISTLZ 950/20/5,08-V GN	158	14289.1	STLZ 965/12/7,62-V-F GN	164			
14192.1	ISTLZ 950/21/5,08-V GN	158	14290.1	STLZ 965/13/7,62-V-F GN	164			
14193.1	ISTLZ 950/22/5,08-V GN	158	14291.1	STLZ 965/14/7,62-V-F GN	164			
14194.1	ISTLZ 950/23/5,08-V GN	158	14292.1	STLZ 965/15/7,62-V-F GN	164			
14195.1	ISTLZ 950/24/5,08-V GN	158	14293.1	STLZ 965/16/7,62-V-F GN	164			

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
14382.1	PBK 2,5/2/7,50-V GN	19	14521.1	PZK 3750/11/5,00-PD10,00 GN	30	14660.1	PBKZ 4701/10/3,81-H-KD GN	15
14383.1	PBK 2,5/3/7,50-V GN	19	14522.1	PZK 3750/12/5,00-PD10,00 GN	30	14661.1	PBKZ 4701/11/3,81-H-KD GN	15
14384.1	PBK 2,5/4/7,50-V GN	19	14532.1	PZK 3750/2/5,08-PD10,16 GN	32	14662.1	PBKZ 4701/12/3,81-H-KD GN	15
14385.1	PBK 2,5/5/7,50-V GN	19	14533.1	PZK 3750/3/5,08-PD10,16 GN	32	17		
14386.1	PBK 2,5/6/7,50-V GN	19	14534.1	PZK 3750/4/5,08-PD10,16 GN	32	17380.6	SDK 4/2A GR	176
14387.1	PBK 2,5/7/7,50-V GN	19	14535.1	PZK 3750/5/5,08-PD10,16 GN	32	17381.6	SDK 4/2A/Z GR	176
14388.1	PBK 2,5/8/7,50-V GN	19	14536.1	PZK 3750/6/5,08-PD10,16 GN	32	17382.6	SDK 4/1A/1L GR	177
14389.1	PBK 2,5/9/7,50-V GN	19	14537.1	PZK 3750/7/5,08-PD10,16 GN	32	17383.6	SDK 4/1A/1L/Z GR	177
14390.1	PBK 2,5/10/7,50-V GN	19	14538.1	PZK 3750/8/5,08-PD10,16 GN	32	17386.6	SDK 10/2A GR	178
14391.1	PBK 2,5/11/7,50-V GN	19	14539.1	PZK 3750/9/5,08-PD10,16 GN	32	17387.6	SDK 10/2A/Z GR	178
14392.1	PBK 2,5/12/7,50-V GN	19	14540.1	PZK 3750/10/5,08-PD10,16 GN	32	17388.6	SDK 10/1A/1L GR	179
14400.1	PBK 2,5/1/7,50-H GN	19	14541.1	PZK 3750/11/5,08-PD10,16 GN	32	17389.6	SDK 10/1A/1L/Z GR	179
14401.1	PBK 2,5/1/7,50-H GN	19	14542.1	PZK 3750/12/5,08-PD10,16 GN	32	17394.6	SDK 16/2A GR	180
14402.1	PBK 2,5/2/7,50-H GN	19	14552.0	PBK 4191/2/2,50-KD LG	12	17396.6	SDK 16/1A/1B GR	181
14403.1	PBK 2,5/3/7,50-H GN	19	14553.0	PBK 4191/3/2,50-KD LG	12	17397.6	SDK 16/1A/1B/Z GR	181
14404.1	PBK 2,5/4/7,50-H GN	19	14554.0	PBK 4191/4/2,50-KD LG	12	17398.6	SDK 16/2A/Z GR	180
14405.1	PBK 2,5/5/7,50-H GN	19	14555.0	PBK 4191/5/2,50-KD LG	12	17431.6	SDK 4-DP GR	176
14406.1	PBK 2,5/6/7,50-H GN	19	14556.0	PBK 4191/6/2,50-KD LG	12	17432.6	SDK 4-FP GR	176, 177
14407.1	PBK 2,5/7/7,50-H GN	19	14557.0	PBK 4191/7/2,50-KD LG	12	17433.6	SDK 4-AP/6 GR	176
14408.1	PBK 2,5/8/7,50-H GN	19	14558.0	PBK 4191/8/2,50-KD LG	12	17434.6	SDK 4-DPA GR	177
14409.1	PBK 2,5/9/7,50-H GN	19	14559.0	PBK 4191/9/2,50-KD LG	12	17435.9	SDK 4-TWI RD	177
14410.1	PBK 2,5/10/7,50-H GN	19	14560.0	PBK 4191/10/2,50-KD LG	12	17436.4	SDK 4-SPI/10 DG	177
14411.1	PBK 2,5/11/7,50-H GN	19	14561.0	PBK 4191/11/2,50-KD LG	12	17437.6	SDK 4-VPI GR	177
14412.1	PBK 2,5/12/7,50-H GN	19	14562.0	PBK 4191/12/2,50-KD LG	12	17438.6	BS-SDK 4 3x10	176, 177
14419.1	SPC/PBK 2,5/2,5mm GN	19	14572.0	PBK 4191/2/2,50-KDVP LG	12	17441.6	SDK 10-DP GR	178
14420.1	PBK 5/1/7,50-H GN	20	14573.0	PBK 4191/3/2,50-KDVP LG	12	17442.6	SDK 10-FP GR	178, 179
14421.1	PBK 5/1/7,50-H GN	20	14574.0	PBK 4191/4/2,50-KDVP LG	12	17443.6	SDK 10-AP/6 GR	178
14422.1	PBK 5/2/7,50-H GN	20	14575.0	PBK 4191/5/2,50-KDVP LG	12	17444.6	SDK 10-DPA GR	179
14423.1	PBK 5/3/7,50-H GN	20	14576.0	PBK 4191/6/2,50-KDVP LG	12	17445.9	SDK 10-TWI RD	179
14424.1	PBK 5/4/7,50-H GN	20	14577.0	PBK 4191/7/2,50-KDVP LG	12	17446.4	SDK 10-SPI/10 DG	179
14425.1	PBK 5/5/7,50-H GN	20	14578.0	PBK 4191/8/2,50-KDVP LG	12	17447.6	SDK 10-VPI GR	179
14426.1	PBK 5/6/7,50-H GN	20	14579.0	PBK 4191/9/2,50-KDVP LG	12	17448.6	BS-SDK 10/16 4x14	178-181
14427.1	PBK 5/7/7,50-H GN	20	14580.0	PBK 4191/10/2,50-KDVP LG	12	17451.6	SDK 16-DP GR	180
14428.1	PBK 5/8/7,50-H GN	20	14581.0	PBK 4191/11/2,50-KDVP LG	12	17452.6	SDK 16-FP GR	180, 181
14429.1	PBK 5/9/7,50-H GN	20	14582.0	PBK 4191/12/2,50-KDVP LG	12	17453.6	SDK 16-AP/6 GR	180, 181
14430.1	PBK 5/10/7,50-H GN	20	14592.1	PBKZ 4791/2/2,54-V-KD GN	13	17454.6	SDK 16-DPA GR	181
14431.1	PBK 5/11/7,50-H GN	20	14593.1	PBKZ 4791/3/2,54-V-KD GN	13	17455.9	SDK 16-TWI RD	181
14432.1	PBK 5/12/7,50-H GN	20	14594.1	PBKZ 4791/4/2,54-V-KD GN	13	17456.4	SDK 16-SPI/10 DG	181
14440.1	PBK 5/1/7,50-H-VP GN	20	14595.1	PBKZ 4791/5/2,54-V-KD GN	13	17457.6	SDK 16-VPI GR	181
14441.1	PBK 5/1/7,50-H-VP GN	20	14596.1	PBKZ 4791/6/2,54-V-KD GN	13	2		
14442.1	PBK 5/2/7,50-H-VP GN	20	14597.1	PBKZ 4791/7/2,54-V-KD GN	13	2034.0	BS-1	189
14443.1	PBK 5/3/7,50-H-VP GN	20	14598.1	PBKZ 4791/8/2,54-V-KD GN	13	2385.0	BS AD/M 2,9x6,5	191
14444.1	PBK 5/4/7,50-H-VP GN	20	14599.1	PBKZ 4791/9/2,54-V-KD GN	13	2960.7	BK 5,08/2,8 FW 1-12	188
14445.1	PBK 5/5/7,50-H-VP GN	20	14600.1	PBKZ 4791/10/2,54-V-KD GN	13	2961.7	BK 5,08/2,8 FW 13-24	188
14446.1	PBK 5/6/7,50-H-VP GN	20	14601.1	PBKZ 4791/11/2,54-V-KD GN	13	2979.0	BK 2,50/2,8 FW 0-9	187
14447.1	PBK 5/7/7,50-H-VP GN	20	14602.1	PBKZ 4791/12/2,54-V-KD GN	13	2980.0	BK 2,50/2,8 FW 1-10	187
14448.1	PBK 5/8/7,50-H-VP GN	20	14612.1	PBKZ 4791/2/2,54-H-KD GN	13	2981.0	BK 2,50/2,8 FW 11-20	187
14449.1	PBK 5/9/7,50-H-VP GN	20	14613.1	PBKZ 4791/3/2,54-H-KD GN	13	2982.0	BK 2,50/2,8 FW 21-30	187
14450.1	PBK 5/10/7,50-H-VP GN	20	14614.1	PBKZ 4791/4/2,54-H-KD GN	13	2983.0	BK 2,50/2,8 FW 31-40	187
14451.1	PBK 5/11/7,50-H-VP GN	20	14615.1	PBKZ 4791/5/2,54-H-KD GN	13	2984.0	BK 2,54/2,8 FW 0-9	187
14452.1	PBK 5/12/7,50-H-VP GN	20	14616.1	PBKZ 4791/6/2,54-H-KD GN	13	2985.0	BK 2,54/2,8 FW 1-10	187
14459.1	AP/PBK 5 GN	20, 21	14617.1	PBKZ 4791/7/2,54-H-KD GN	13	2986.0	BK 2,54/2,8 FW 11-20	187
14490.1	PBK 5/1/11,50-H GN	21	14618.1	PBKZ 4791/8/2,54-H-KD GN	13	2987.0	BK 2,54/2,8 FW 21-30	187
14491.1	PBK 5/1/11,50-H GN	21	14619.1	PBKZ 4791/9/2,54-H-KD GN	13	2988.0	BK 2,54/2,8 FW 31-40	187
14492.1	PBK 5/2/11,50-H GN	21	14620.1	PBKZ 4791/10/2,54-H-KD GN	13	30		
14493.1	PBK 5/3/11,50-H GN	21	14621.1	PBKZ 4791/11/2,54-H-KD GN	13	30002.1	PKB 1551/2/3,50 GN	103
14494.1	PBK 5/4/11,50-H GN	21	14622.1	PBKZ 4791/12/2,54-H-KD GN	13	30003.1	PKB 1551/3/3,50 GN	103
14495.1	PBK 5/5/11,50-H GN	21	14632.1	PBKZ 4701/2/3,81-V-KD GN	15	30004.1	PKB 1551/4/3,50 GN	103
14496.1	PBK 5/6/11,50-H GN	21	14633.1	PBKZ 4701/3/3,81-V-KD GN	15	30005.1	PKB 1551/5/3,50 GN	103
14497.1	PBK 5/7/11,50-H GN	21	14634.1	PBKZ 4701/4/3,81-V-KD GN	15	30006.1	PKB 1551/6/3,50 GN	103
14498.1	PBK 5/8/11,50-H GN	21	14635.1	PBKZ 4701/5/3,81-V-KD GN	15	30007.1	PKB 1551/7/3,50 GN	103
14499.1	PBK 5/9/11,50-H GN	21	14636.1	PBKZ 4701/6/3,81-V-KD GN	15	30008.1	PKB 1551/8/3,50 GN	103
14500.1	PBK 5/10/11,50-H GN	21	14637.1	PBKZ 4701/7/3,81-V-KD GN	15	30009.1	PKB 1551/9/3,50 GN	103
14501.1	PBK 5/11/11,50-H GN	21	14638.1	PBKZ 4701/8/3,81-V-KD GN	15	30010.1	PKB 1551/10/3,50 GN	103
14502.1	PBK 5/12/11,50-H GN	21	14639.1	PBKZ 4701/9/3,81-V-KD GN	15	30011.1	PKB 1551/11/3,50 GN	103
14509.1	SPC/PBK 5/2,5mm GN	21	14640.1	PBKZ 4701/10/3,81-V-KD GN	15	30012.1	PKB 1551/12/3,50 GN	103
14512.1	PZK 3750/2/5,00-PD10,00 GN	30	14641.1	PBKZ 4701/11/3,81-V-KD GN	15	30013.1	PKB 1551/13/3,50 GN	103
14513.1	PZK 3750/3/5,00-PD10,00 GN	30	14642.1	PBKZ 4701/12/3,81-V-KD GN	15	30014.1	PKB 1551/14/3,50 GN	103
14514.1	PZK 3750/4/5,00-PD10,00 GN	30	14652.1	PBKZ 4701/2/3,81-H-KD GN	15	30015.1	PKB 1551/15/3,50 GN	103
14515.1	PZK 3750/5/5,00-PD10,00 GN	30	14653.1	PBKZ 4701/3/3,81-H-KD GN	15			
14516.1	PZK 3750/6/5,00-PD10,00 GN	30	14654.1	PBKZ 4701/4/3,81-H-KD GN	15			
14517.1	PZK 3750/7/5,00-PD10,00 GN	30	14655.1	PBKZ 4701/5/3,81-H-KD GN	15			
14518.1	PZK 3750/8/5,00-PD10,00 GN	30	14656.1	PBKZ 4701/6/3,81-H-KD GN	15			
14519.1	PZK 3750/9/5,00-PD10,00 GN	30	14657.1	PBKZ 4701/7/3,81-H-KD GN	15			
14520.1	PZK 3750/10/5,00-PD10,00 GN	30	14658.1	PBKZ 4701/8/3,81-H-KD GN	15			
			14659.1	PBKZ 4701/9/3,81-H-KD GN	15			

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
30016.1	PKB 1551/16/3,50 GN	103	30145.1	PKBZ 950/5/5,08-HC GN	113	30250.1	PKBZ 955/20/5,08 GN	114
30017.1	PKB 1551/17/3,50 GN	103	30146.1	PKBZ 950/6/5,08-HC GN	113	30251.1	PKBZ 955/21/5,08 GN	114
30018.1	PKB 1551/18/3,50 GN	103	30147.1	PKBZ 950/7/5,08-HC GN	113	30252.1	PKBZ 955/22/5,08 GN	114
30019.1	PKB 1551/19/3,50 GN	103	30148.1	PKBZ 950/8/5,08-HC GN	113	30253.1	PKBZ 955/23/5,08 GN	114
30020.1	PKB 1551/20/3,50 GN	103	30149.1	PKBZ 950/9/5,08-HC GN	113	30254.1	PKBZ 955/24/5,08 GN	114
30022.1	PKB 1551/2/3,50-F GN	103	3015.0	BK 3,50/2,8 FW 0-9	187	30262.1	PFB 4551/2/3,50-KD GN	89
30023.1	PKB 1551/3/3,50-F GN	103	30150.1	PKBZ 950/10/5,08-HC GN	113	30263.1	PFB 4551/3/3,50-KD GN	89
30024.1	PKB 1551/4/3,50-F GN	103	30151.1	PKBZ 950/11/5,08-HC GN	113	30264.1	PFB 4551/4/3,50-KD GN	89
30025.1	PKB 1551/5/3,50-F GN	103	30152.1	PKBZ 950/12/5,08-HC GN	113	30265.1	PFB 4551/5/3,50-KD GN	89
30026.1	PKB 1551/6/3,50-F GN	103	3016.0	BK 3,50/2,8 FW 1-10	187	30266.1	PFB 4551/6/3,50-KD GN	89
30027.1	PKB 1551/7/3,50-F GN	103	30162.1	PKB 950/2/5,00-F-HC GN	109	30267.1	PFB 4551/7/3,50-KD GN	89
30028.1	PKB 1551/8/3,50-F GN	103	30163.1	PKB 950/3/5,00-F-HC GN	109	30268.1	PFB 4551/8/3,50-KD GN	89
30029.1	PKB 1551/9/3,50-F GN	103	30164.1	PKB 950/4/5,00-F-HC GN	109	30269.1	PFB 4551/9/3,50-KD GN	89
30030.1	PKB 1551/10/3,50-F GN	103	30165.1	PKB 950/5/5,00-F-HC GN	109	30270.1	PFB 4551/10/3,50-KD GN	89
30031.1	PKB 1551/11/3,50-F GN	103	30166.1	PKB 950/6/5,00-F-HC GN	109	30271.1	PFB 4551/11/3,50-KD GN	89
30032.1	PKB 1551/12/3,50-F GN	103	30167.1	PKB 950/7/5,00-F-HC GN	109	30272.1	PFB 4551/12/3,50-KD GN	89
30033.1	PKB 1551/13/3,50-F GN	103	30168.1	PKB 950/8/5,00-F-HC GN	109	30273.1	PFB 4551/13/3,50-KD GN	89
30034.1	PKB 1551/14/3,50-F GN	103	30169.1	PKB 950/9/5,00-F-HC GN	109	30274.1	PFB 4551/14/3,50-KD GN	89
30035.1	PKB 1551/15/3,50-F GN	103	3017.0	BK 3,50/2,8 FW 11-20	187	30275.1	PFB 4551/15/3,50-KD GN	89
30036.1	PKB 1551/16/3,50-F GN	103	30170.1	PKB 950/10/5,00-F-HC GN	109	30276.1	PFB 4551/16/3,50-KD GN	89
30037.1	PKB 1551/17/3,50-F GN	103	30171.1	PKB 950/11/5,00-F-HC GN	109	30277.1	PFB 4551/17/3,50-KD GN	89
30038.1	PKB 1551/18/3,50-F GN	103	30172.1	PKB 950/12/5,00-F-HC GN	109	30278.1	PFB 4551/18/3,50-KD GN	89
30039.1	PKB 1551/19/3,50-F GN	103	3018.0	BK 3,50/2,8 FW 21-30	187	30279.1	PFB 4551/19/3,50-KD GN	89
30040.1	PKB 1551/20/3,50-F GN	103	30182.1	PKBZ 950/2/5,08-F-HC GN	113	30280.1	PFB 4551/20/3,50-KD GN	89
30062.1	PKB 1552/2/3,50 GN	104	30183.1	PKBZ 950/3/5,08-F-HC GN	113	30282.1	PFB 4551/2/3,50-FKD GN	89
30063.1	PKB 1552/3/3,50 GN	104	30184.1	PKBZ 950/4/5,08-F-HC GN	113	30283.1	PFB 4551/3/3,50-FKD GN	89
30064.1	PKB 1552/4/3,50 GN	104	30185.1	PKBZ 950/5/5,08-F-HC GN	113	30284.1	PFB 4551/4/3,50-FKD GN	89
30065.1	PKB 1552/5/3,50 GN	104	30186.1	PKBZ 950/6/5,08-F-HC GN	113	30285.1	PFB 4551/5/3,50-FKD GN	89
30066.1	PKB 1552/6/3,50 GN	104	30187.1	PKBZ 950/7/5,08-F-HC GN	113	30286.1	PFB 4551/6/3,50-FKD GN	89
30067.1	PKB 1552/7/3,50 GN	104	30188.1	PKBZ 950/8/5,08-F-HC GN	113	30287.1	PFB 4551/7/3,50-FKD GN	89
30068.1	PKB 1552/8/3,50 GN	104	30189.1	PKBZ 950/9/5,08-F-HC GN	113	30288.1	PFB 4551/8/3,50-FKD GN	89
30069.1	PKB 1552/9/3,50 GN	104	3019.0	BK 3,50/2,8 FW 31-40	187	30289.1	PFB 4551/9/3,50-FKD GN	89
30070.1	PKB 1552/10/3,50 GN	104	30190.1	PKBZ 950/10/5,08-F-HC GN	113	30290.1	PFB 4551/10/3,50-FKD GN	89
30071.1	PKB 1552/11/3,50 GN	104	30191.1	PKBZ 950/11/5,08-F-HC GN	113	30291.1	PFB 4551/11/3,50-FKD GN	89
30072.1	PKB 1552/12/3,50 GN	104	30192.1	PKBZ 950/12/5,08-F-HC GN	113	30292.1	PFB 4551/12/3,50-FKD GN	89
30073.1	PKB 1552/13/3,50 GN	104	30202.1	PKB 955/2/5,00 GN	110	30293.1	PFB 4551/13/3,50-FKD GN	89
30074.1	PKB 1552/14/3,50 GN	104	30203.1	PKB 955/3/5,00 GN	110	30294.1	PFB 4551/14/3,50-FKD GN	89
30075.1	PKB 1552/15/3,50 GN	104	30204.1	PKB 955/4/5,00 GN	110	30295.1	PFB 4551/15/3,50-FKD GN	89
30076.1	PKB 1552/16/3,50 GN	104	30205.1	PKB 955/5/5,00 GN	110	30296.1	PFB 4551/16/3,50-FKD GN	89
30077.1	PKB 1552/17/3,50 GN	104	30206.1	PKB 955/6/5,00 GN	110	30297.1	PFB 4551/17/3,50-FKD GN	89
30078.1	PKB 1552/18/3,50 GN	104	30207.1	PKB 955/7/5,00 GN	110	30298.1	PFB 4551/18/3,50-FKD GN	89
30079.1	PKB 1552/19/3,50 GN	104	30208.1	PKB 955/8/5,00 GN	110	30299.1	PFB 4551/19/3,50-FKD GN	89
30080.1	PKB 1552/20/3,50 GN	104	30209.1	PKB 955/9/5,00 GN	110	30300.1	PFB 4551/20/3,50-FKD GN	89
30082.1	PKB 1552/2/3,50-F GN	104	30210.1	PKB 955/10/5,00 GN	110	30302.1	PFB 4561/2/3,50-KD GN	90
30083.1	PKB 1552/3/3,50-F GN	104	30211.1	PKB 955/11/5,00 GN	110	30303.1	PFB 4561/3/3,50-KD GN	90
30084.1	PKB 1552/4/3,50-F GN	104	30212.1	PKB 955/12/5,00 GN	110	30304.1	PFB 4561/4/3,50-KD GN	90
30085.1	PKB 1552/5/3,50-F GN	104	30213.1	PKB 955/13/5,00 GN	110	30305.1	PFB 4561/5/3,50-KD GN	90
30086.1	PKB 1552/6/3,50-F GN	104	30214.1	PKB 955/14/5,00 GN	110	30306.1	PFB 4561/6/3,50-KD GN	90
30087.1	PKB 1552/7/3,50-F GN	104	30215.1	PKB 955/15/5,00 GN	110	30307.1	PFB 4561/7/3,50-KD GN	90
30088.1	PKB 1552/8/3,50-F GN	104	30216.1	PKB 955/16/5,00 GN	110	30308.1	PFB 4561/8/3,50-KD GN	90
30089.1	PKB 1552/9/3,50-F GN	104	30217.1	PKB 955/17/5,00 GN	110	30309.1	PFB 4561/9/3,50-KD GN	90
30090.1	PKB 1552/10/3,50-F GN	104	30218.1	PKB 955/18/5,00 GN	110	30310.1	PFB 4561/10/3,50-KD GN	90
30091.1	PKB 1552/11/3,50-F GN	104	30219.1	PKB 955/19/5,00 GN	110	30311.1	PFB 4561/11/3,50-KD GN	90
30092.1	PKB 1552/12/3,50-F GN	104	30220.1	PKB 955/20/5,00 GN	110	30312.1	PFB 4561/12/3,50-KD GN	90
30093.1	PKB 1552/13/3,50-F GN	104	30221.1	PKB 955/21/5,00 GN	110	30313.1	PFB 4561/13/3,50-KD GN	90
30094.1	PKB 1552/14/3,50-F GN	104	30222.1	PKB 955/22/5,00 GN	110	30314.1	PFB 4561/14/3,50-KD GN	90
30095.1	PKB 1552/15/3,50-F GN	104	30223.1	PKB 955/23/5,00 GN	110	30315.1	PFB 4561/15/3,50-KD GN	90
30096.1	PKB 1552/16/3,50-F GN	104	30224.1	PKB 955/24/5,00 GN	110	30316.1	PFB 4561/16/3,50-KD GN	90
30097.1	PKB 1552/17/3,50-F GN	104	30232.1	PKBZ 955/2/5,08 GN	114	30317.1	PFB 4561/17/3,50-KD GN	90
30098.1	PKB 1552/18/3,50-F GN	104	30233.1	PKBZ 955/3/5,08 GN	114	30318.1	PFB 4561/18/3,50-KD GN	90
30099.1	PKB 1552/19/3,50-F GN	104	30234.1	PKBZ 955/4/5,08 GN	114	30319.1	PFB 4561/19/3,50-KD GN	90
30100.1	PKB 1552/20/3,50-F GN	104	30235.1	PKBZ 955/5/5,08 GN	114	3032.0	BK 3,81/2,8 FW 0-9	187
30122.1	PKB 950/2/5,00-HC GN	109	30236.1	PKBZ 955/6/5,08 GN	114	30320.1	PFB 4561/20/3,50-KD GN	90
30123.1	PKB 950/3/5,00-HC GN	109	30237.1	PKBZ 955/7/5,08 GN	114	30322.1	PFB 4561/2/3,50-FKD GN	90
30124.1	PKB 950/4/5,00-HC GN	109	30238.1	PKBZ 955/8/5,08 GN	114	30323.1	PFB 4561/3/3,50-FKD GN	90
30125.1	PKB 950/5/5,00-HC GN	109	30239.1	PKBZ 955/9/5,08 GN	114	30324.1	PFB 4561/4/3,50-FKD GN	90
30126.1	PKB 950/6/5,00-HC GN	109	30240.1	PKBZ 955/10/5,08 GN	114	30325.1	PFB 4561/5/3,50-FKD GN	90
30127.1	PKB 950/7/5,00-HC GN	109	30241.1	PKBZ 955/11/5,08 GN	114	30326.1	PFB 4561/6/3,50-FKD GN	90
30128.1	PKB 950/8/5,00-HC GN	109	30242.1	PKBZ 955/12/5,08 GN	114	30327.1	PFB 4561/7/3,50-FKD GN	90
30129.1	PKB 950/9/5,00-HC GN	109	30243.1	PKBZ 955/13/5,08 GN	114	30328.1	PFB 4561/8/3,50-FKD GN	90
30130.1	PKB 950/10/5,00-HC GN	109	30244.1	PKBZ 955/14/5,08 GN	114	30329.1	PFB 4561/9/3,50-FKD GN	90
30131.1	PKB 950/11/5,00-HC GN	109	30245.1	PKBZ 955/15/5,08 GN	114	3033.0	BK 3,81/2,8 FW 1-10	187
30132.1	PKB 950/12/5,00-HC GN	109	30246.1	PKBZ 955/16/5,08 GN	114	30330.1	PFB 4561/10/3,50-FKD GN	90
30142.1	PKBZ 950/2/5,08-HC GN	113	30247.1	PKBZ 955/17/5,08 GN	114	30331.1	PFB 4561/11/3,50-FKD GN	90
30143.1	PKBZ 950/3/5,08-HC GN	113	30248.1	PKBZ 955/18/5,08 GN	114	30332.1	PFB 4561/12/3,50-FKD GN	90
30144.1	PKBZ 950/4/5,08-HC GN	113	30249.1	PKBZ 955/19/5,08 GN	114	30333.1	PFB 4561/13/3,50-FKD GN	90

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
30334.1	PFB 4561/14/3,50-FKD GN	90	30417.1	PFBZ 4951/7/5,08-KD GN	94	30510.1	STL 950/10/5,00-V-HC GN	144
30335.1	PFB 4561/15/3,50-FKD GN	90	30418.1	PFBZ 4951/8/5,08-KD GN	94	30511.1	STL 950/11/5,00-V-HC GN	144
30336.1	PFB 4561/16/3,50-FKD GN	90	30419.1	PFBZ 4951/9/5,08-KD GN	94	30512.1	STL 950/12/5,00-V-HC GN	144
30337.1	PFB 4561/17/3,50-FKD GN	90	30420.1	PFBZ 4951/10/5,08-KD GN	94	30522.1	STL 950/2/5,00-H-HC GN	144
30338.1	PFB 4561/18/3,50-FKD GN	90	30421.1	PFBZ 4951/11/5,08-KD GN	94	30523.1	STL 950/3/5,00-H-HC GN	144
30339.1	PFB 4561/19/3,50-FKD GN	90	30422.1	PFBZ 4951/12/5,08-KD GN	94	30524.1	STL 950/4/5,00-H-HC GN	144
3034.0	BK 3,81/2,8 FW 11-20	187	30423.1	PFBZ 4951/13/5,08-KD GN	94	30525.1	STL 950/5/5,00-H-HC GN	144
30340.1	PFB 4561/20/3,50-FKD GN	90	30424.1	PFBZ 4951/14/5,08-KD GN	94	30526.1	STL 950/6/5,00-H-HC GN	144
30342.1	PFBZ 4561/2/3,81-KD GN	92	30425.1	PFBZ 4951/15/5,08-KD GN	94	30527.1	STL 950/7/5,00-H-HC GN	144
30343.1	PFBZ 4561/3/3,81-KD GN	92	30426.1	PFBZ 4951/16/5,08-KD GN	94	30528.1	STL 950/8/5,00-H-HC GN	144
30344.1	PFBZ 4561/4/3,81-KD GN	92	30427.1	PFBZ 4951/17/5,08-KD GN	94	30529.1	STL 950/9/5,00-H-HC GN	144
30345.1	PFBZ 4561/5/3,81-KD GN	92	30428.1	PFBZ 4951/18/5,08-KD GN	94	30530.1	STL 950/10/5,00-H-HC GN	144
30346.1	PFBZ 4561/6/3,81-KD GN	92	30429.1	PFBZ 4951/19/5,08-KD GN	94	30531.1	STL 950/11/5,00-H-HC GN	144
30347.1	PFBZ 4561/7/3,81-KD GN	92	30430.1	PFBZ 4951/20/5,08-KD GN	94	30532.1	STL 950/12/5,00-H-HC GN	144
30348.1	PFBZ 4561/8/3,81-KD GN	92	30431.1	PFBZ 4951/21/5,08-KD GN	94	30542.1	STL 950/2/5,00-V-G-HC GN	146
30349.1	PFBZ 4561/9/3,81-KD GN	92	30432.1	PFBZ 4951/22/5,08-KD GN	94	30543.1	STL 950/3/5,00-V-G-HC GN	146
3035.0	BK 3,81/2,8 FW 21-30	187	30433.1	PFBZ 4951/23/5,08-KD GN	94	30544.1	STL 950/4/5,00-V-G-HC GN	146
30350.1	PFBZ 4561/10/3,81-KD GN	92	30434.1	PFBZ 4951/24/5,08-KD GN	94	30545.1	STL 950/5/5,00-V-G-HC GN	146
30351.1	PFBZ 4561/11/3,81-KD GN	92	30442.1	PFB 4951/2/5,00-FKD GN	93	30546.1	STL 950/6/5,00-V-G-HC GN	146
30352.1	PFBZ 4561/12/3,81-KD GN	92	30443.1	PFB 4951/3/5,00-FKD GN	93	30547.1	STL 950/7/5,00-V-G-HC GN	146
30353.1	PFBZ 4561/13/3,81-KD GN	92	30444.1	PFB 4951/4/5,00-FKD GN	93	30548.1	STL 950/8/5,00-V-G-HC GN	146
30354.1	PFBZ 4561/14/3,81-KD GN	92	30445.1	PFB 4951/5/5,00-FKD GN	93	30549.1	STL 950/9/5,00-V-G-HC GN	146
30355.1	PFBZ 4561/15/3,81-KD GN	92	30446.1	PFB 4951/6/5,00-FKD GN	93	30550.1	STL 950/10/5,00-V-G-HC GN	146
30356.1	PFBZ 4561/16/3,81-KD GN	92	30447.1	PFB 4951/7/5,00-FKD GN	93	30551.1	STL 950/11/5,00-V-G-HC GN	146
30357.1	PFBZ 4561/17/3,81-KD GN	92	30448.1	PFB 4951/8/5,00-FKD GN	93	30552.1	STL 950/12/5,00-V-G-HC GN	146
30358.1	PFBZ 4561/18/3,81-KD GN	92	30449.1	PFB 4951/9/5,00-FKD GN	93	30562.1	STL 950/2/5,00-H-G-HC GN	146
30359.1	PFBZ 4561/19/3,81-KD GN	92	30450.1	PFB 4951/10/5,00-FKD GN	93	30563.1	STL 950/3/5,00-H-G-HC GN	146
30360.1	PFBZ 4561/20/3,81-KD GN	92	30451.1	PFB 4951/11/5,00-FKD GN	93	30564.1	STL 950/4/5,00-H-G-HC GN	146
30362.1	PFBZ 4561/2/3,81-FKD GN	92	30452.1	PFB 4951/12/5,00-FKD GN	93	30565.1	STL 950/5/5,00-H-G-HC GN	146
30363.1	PFBZ 4561/3/3,81-FKD GN	92	30453.1	PFB 4951/13/5,00-FKD GN	93	30566.1	STL 950/6/5,00-H-G-HC GN	146
30364.1	PFBZ 4561/4/3,81-FKD GN	92	30454.1	PFB 4951/14/5,00-FKD GN	93	30567.1	STL 950/7/5,00-H-G-HC GN	146
30365.1	PFBZ 4561/5/3,81-FKD GN	92	30455.1	PFB 4951/15/5,00-FKD GN	93	30568.1	STL 950/8/5,00-H-G-HC GN	146
30366.1	PFBZ 4561/6/3,81-FKD GN	92	30456.1	PFB 4951/16/5,00-FKD GN	93	30569.1	STL 950/9/5,00-H-G-HC GN	146
30367.1	PFBZ 4561/7/3,81-FKD GN	92	30457.1	PFB 4951/17/5,00-FKD GN	93	30570.1	STL 950/10/5,00-H-G-HC GN	146
30368.1	PFBZ 4561/8/3,81-FKD GN	92	30458.1	PFB 4951/18/5,00-FKD GN	93	30571.1	STL 950/11/5,00-H-G-HC GN	146
30369.1	PFBZ 4561/9/3,81-FKD GN	92	30459.1	PFB 4951/19/5,00-FKD GN	93	30572.1	STL 950/12/5,00-H-G-HC GN	146
3036.0	BK 3,81/2,8 FW 31-40	187	30460.1	PFB 4951/20/5,00-FKD GN	93	30582.1	STL 950/2/5,00-V-F-HC GN	148
30370.1	PFBZ 4561/10/3,81-FKD GN	92	30461.1	PFB 4951/21/5,00-FKD GN	93	30583.1	STL 950/3/5,00-V-F-HC GN	148
30371.1	PFBZ 4561/11/3,81-FKD GN	92	30462.1	PFB 4951/22/5,00-FKD GN	93	30584.1	STL 950/4/5,00-V-F-HC GN	148
30372.1	PFBZ 4561/12/3,81-FKD GN	92	30463.1	PFB 4951/23/5,00-FKD GN	93	30585.1	STL 950/5/5,00-V-F-HC GN	148
30373.1	PFBZ 4561/13/3,81-FKD GN	92	30464.1	PFB 4951/24/5,00-FKD GN	93	30586.1	STL 950/6/5,00-V-F-HC GN	148
30374.1	PFBZ 4561/14/3,81-FKD GN	92	30472.1	PFBZ 4951/2/5,08-FKD GN	94	30587.1	STL 950/7/5,00-V-F-HC GN	148
30375.1	PFBZ 4561/15/3,81-FKD GN	92	30473.1	PFBZ 4951/3/5,08-FKD GN	94	30588.1	STL 950/8/5,00-V-F-HC GN	148
30376.1	PFBZ 4561/16/3,81-FKD GN	92	30474.1	PFBZ 4951/4/5,08-FKD GN	94	30589.1	STL 950/9/5,00-V-F-HC GN	148
30377.1	PFBZ 4561/17/3,81-FKD GN	92	30475.1	PFBZ 4951/11/5,08-FKD GN	94	30590.1	STL 950/10/5,00-V-F-HC GN	148
30378.1	PFBZ 4561/18/3,81-FKD GN	92	30476.1	PFBZ 4951/6/5,08-FKD GN	94	30591.1	STL 950/11/5,00-V-F-HC GN	148
30379.1	PFBZ 4561/19/3,81-FKD GN	92	30477.1	PFBZ 4951/7/5,08-FKD GN	94	30592.1	STL 950/12/5,00-V-F-HC GN	148
30380.1	PFBZ 4561/20/3,81-FKD GN	92	30478.1	PFBZ 4951/8/5,08-FKD GN	94	30602.1	STL 950/2/5,00-H-F-HC GN	148
30382.1	PFB 4951/2/5,00-KD GN	93	30479.1	PFBZ 4951/9/5,08-FKD GN	94	30603.1	STL 950/3/5,00-H-F-HC GN	148
30383.1	PFB 4951/3/5,00-KD GN	93	30480.1	PFBZ 4951/10/5,08-FKD GN	94	30604.1	STL 950/4/5,00-H-F-HC GN	148
30384.1	PFB 4951/4/5,00-KD GN	93	30481.1	PFBZ 4951/11/5,08-FKD GN	94	30605.1	STL 950/5/5,00-H-F-HC GN	148
30385.1	PFB 4951/5/5,00-KD GN	93	30482.1	PFBZ 4951/12/5,08-FKD GN	94	30606.1	STL 950/6/5,00-H-F-HC GN	148
30386.1	PFB 4951/6/5,00-KD GN	93	30483.1	PFBZ 4951/13/5,08-FKD GN	94	30607.1	STL 950/7/5,00-H-F-HC GN	148
30387.1	PFB 4951/7/5,00-KD GN	93	30484.1	PFBZ 4951/14/5,08-FKD GN	94	30608.1	STL 950/8/5,00-H-F-HC GN	148
30388.1	PFB 4951/8/5,00-KD GN	93	30485.1	PFBZ 4951/15/5,08-FKD GN	94	30609.1	STL 950/9/5,00-H-F-HC GN	148
30389.1	PFB 4951/9/5,00-KD GN	93	30486.1	PFBZ 4951/16/5,08-FKD GN	94	30610.1	STL 950/10/5,00-H-F-HC GN	148
30390.1	PFB 4951/10/5,00-KD GN	93	30487.1	PFBZ 4951/17/5,08-FKD GN	94	30611.1	STL 950/11/5,00-H-F-HC GN	148
30391.1	PFB 4951/11/5,00-KD GN	93	30488.1	PFBZ 4951/18/5,08-FKD GN	94	30612.1	STL 950/12/5,00-H-F-HC GN	148
30392.1	PFB 4951/12/5,00-KD GN	93	30489.1	PFBZ 4951/19/5,08-FKD GN	94	30622.1	STLZ 950/2/5,08-V-HC GN	152
30393.1	PFB 4951/13/5,00-KD GN	93	30490.1	PFBZ 4951/20/5,08-FKD GN	94	30623.1	STLZ 950/3/5,08-V-HC GN	152
30394.1	PFB 4951/14/5,00-KD GN	93	30491.1	PFBZ 4951/21/5,08-FKD GN	94	30624.1	STLZ 950/4/5,08-V-HC GN	152
30395.1	PFB 4951/15/5,00-KD GN	93	30492.1	PFBZ 4951/22/5,08-FKD GN	94	30625.1	STLZ 950/5/5,08-V-HC GN	152
30396.1	PFB 4951/16/5,00-KD GN	93	30493.1	PFBZ 4951/23/5,08-FKD GN	94	30626.1	STLZ 950/6/5,08-V-HC GN	152
30397.1	PFB 4951/17/5,00-KD GN	93	30494.1	PFBZ 4951/24/5,08-FKD GN	94	30627.1	STLZ 950/7/5,08-V-HC GN	152
30398.1	PFB 4951/18/5,00-KD GN	93	30499.1	BLS-STL 2 GN	134-157, 165, 166, 185	30628.1	STLZ 950/8/5,08-V-HC GN	152
30399.1	PFB 4951/19/5,00-KD GN	93				30629.1	STLZ 950/9/5,08-V-HC GN	152
30400.1	PFB 4951/20/5,00-KD GN	93				30630.1	STLZ 950/10/5,08-V-HC GN	152
30401.1	PFB 4951/21/5,00-KD GN	93	30502.1	STL 950/2/5,00-V-HC GN	144	30631.1	STLZ 950/11/5,08-V-HC GN	152
30402.1	PFB 4951/22/5,00-KD GN	93	30503.1	STL 950/3/5,00-V-HC GN	144	30632.1	STLZ 950/12/5,08-V-HC GN	152
30403.1	PFB 4951/23/5,00-KD GN	93	30504.1	STL 950/4/5,00-V-HC GN	144	30642.1	STLZ 950/2/5,08-H-HC GN	152
30404.1	PFB 4951/24/5,00-KD GN	93	30505.1	STL 950/5/5,00-V-HC GN	144	30643.1	STLZ 950/3/5,08-H-HC GN	152
30412.1	PFBZ 4951/2/5,08-KD GN	94	30506.1	STL 950/6/5,00-V-HC GN	144	30644.1	STLZ 950/4/5,08-H-HC GN	152
30413.1	PFBZ 4951/3/5,08-KD GN	94	30507.1	STL 950/7/5,00-V-HC GN	144	30645.1	STLZ 950/5/5,08-H-HC GN	152
30414.1	PFBZ 4951/4/5,08-KD GN	94	30508.1	STL 950/8/5,00-V-HC GN	144	30646.1	STLZ 950/6/5,08-H-HC GN	152
30415.1	PFBZ 4951/5/5,08-KD GN	94	30509.1	STL 950/9/5,00-V-HC GN	144	30647.1	STLZ 950/7/5,08-H-HC GN	152
30416.1	PFBZ 4951/6/5,08-KD GN	94				30648.1	STLZ 950/8/5,08-H-HC GN	152

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
30649.1	STLZ 950/9/5,08-H-HC GN	152	30778.1	PZK 3001/8/5,00/5,08-WD GN	28	31373.1	PBT 1200/13/5,08-F GN	121
30650.1	STLZ 950/10/5,08-H-HC GN	152	30779.1	PZK 3001/9/5,00/5,08-WD GN	28	31374.1	PBT 1200/14/5,08-F GN	121
30651.1	STLZ 950/11/5,08-H-HC GN	152	30780.1	PZK 3001/10/5,00/5,08-WD GN	28	31375.1	PBT 1200/15/5,08-F GN	121
30652.1	STLZ 950/12/5,08-H-HC GN	152	30781.1	PZK 3001/11/5,00/5,08-WD GN	28	31376.1	PBT 1200/16/5,08-F GN	121
30662.1	STLZ 950/2/5,08-V-G-HC GN	154	30782.1	PZK 3001/12/5,00/5,08-WD GN	28	31377.1	PBT 1200/17/5,08-F GN	121
30663.1	STLZ 950/3/5,08-V-G-HC GN	154	30783.1	PZK 3001/13/5,00/5,08-WD GN	28	31378.1	PBT 1200/18/5,08-F GN	121
30664.1	STLZ 950/4/5,08-V-G-HC GN	154	30784.1	PZK 3001/14/5,00/5,08-WD GN	28	31379.1	PBT 1200/19/5,08-F GN	121
30665.1	STLZ 950/5/5,08-V-G-HC GN	154	30785.1	PZK 3001/15/5,00/5,08-WD GN	28	31380.1	PBT 1200/20/5,08-F GN	121
30666.1	STLZ 950/6/5,08-V-G-HC GN	154	30786.1	PZK 3001/16/5,00/5,08-WD GN	28	31381.1	PBT 1200/21/5,08-F GN	121
30667.1	STLZ 950/7/5,08-V-G-HC GN	154	30787.1	PZK 3001/17/5,00/5,08-WD GN	28	31382.1	PBT 1200/22/5,08-F GN	121
30668.1	STLZ 950/8/5,08-V-G-HC GN	154	30788.1	PZK 3001/18/5,00/5,08-WD GN	28	31383.1	PBT 1200/23/5,08-F GN	121
30669.1	STLZ 950/9/5,08-V-G-HC GN	154	30789.1	PZK 3001/19/5,00/5,08-WD GN	28	31384.1	PBT 1200/24/5,08-F GN	121
30670.1	STLZ 950/10/5,08-V-G-HC GN	154	30790.1	PZK 3001/20/5,00/5,08-WD GN	28	31392.1	PBT 1200/2/5,0-F GN	120
30671.1	STLZ 950/11/5,08-V-G-HC GN	154	30791.1	PZK 3001/21/5,00/5,08-WD GN	28	31393.1	PBT 1200/3/5,0-F GN	120
30672.1	STLZ 950/12/5,08-V-G-HC GN	154	30792.1	PZK 3001/22/5,00/5,08-WD GN	28	31394.1	PBT 1200/4/5,0-F GN	120
30682.1	STLZ 950/2/5,08-H-G-HC GN	154	30793.1	PZK 3001/23/5,00/5,08-WD GN	28	31395.1	PBT 1200/5/5,0-F GN	120
30683.1	STLZ 950/3/5,08-H-G-HC GN	154	30794.1	PZK 3001/24/5,00/5,08-WD GN	28	31396.1	PBT 1200/6/5,0-F GN	120
30684.1	STLZ 950/4/5,08-H-G-HC GN	154				31397.1	PBT 1200/7/5,0-F GN	120
30685.1	STLZ 950/5/5,08-H-G-HC GN	154				31398.1	PBT 1200/8/5,0-F GN	120
30686.1	STLZ 950/6/5,08-H-G-HC GN	154				31399.1	PBT 1200/9/5,0-F GN	120
30687.1	STLZ 950/7/5,08-H-G-HC GN	154				31400.1	PBT 1200/10/5,0-F GN	120
30688.1	STLZ 950/8/5,08-H-G-HC GN	154				31401.1	PBT 1200/11/5,0-F GN	120
30689.1	STLZ 950/9/5,08-H-G-HC GN	154				31402.1	PBT 1200/12/5,0-F GN	120
30690.1	STLZ 950/10/5,08-H-G-HC GN	154				31403.1	PBT 1200/13/5,0-F GN	120
30691.1	STLZ 950/11/5,08-H-G-HC GN	154				31404.1	PBT 1200/14/5,0-F GN	120
30692.1	STLZ 950/12/5,08-H-G-HC GN	154				31405.1	PBT 1200/15/5,0-F GN	120
30702.1	STLZ 950/2/5,08-V-F-HC GN	156				31406.1	PBT 1200/16/5,0-F GN	120
30703.1	STLZ 950/3/5,08-V-F-HC GN	156				31407.1	PBT 1200/17/5,0-F GN	120
30704.1	STLZ 950/4/5,08-V-F-HC GN	156				31408.1	PBT 1200/18/5,0-F GN	120
30705.1	STLZ 950/5/5,08-V-F-HC GN	156				31409.1	PBT 1200/19/5,0-F GN	120
30706.1	STLZ 950/6/5,08-V-F-HC GN	156				31410.1	PBT 1200/20/5,0-F GN	120
30707.1	STLZ 950/7/5,08-V-F-HC GN	156				31411.1	PBT 1200/21/5,0-F GN	120
30708.1	STLZ 950/8/5,08-V-F-HC GN	156				31412.1	PBT 1200/22/5,0-F GN	120
30709.1	STLZ 950/9/5,08-V-F-HC GN	156				31413.1	PBT 1200/23/5,0-F GN	120
30710.1	STLZ 950/10/5,08-V-F-HC GN	156				31414.1	PBT 1200/24/5,0-F GN	120
30711.1	STLZ 950/11/5,08-V-F-HC GN	156				31422.1	PBT 1200/2/5,0 GN	120
30712.1	STLZ 950/12/5,08-V-F-HC GN	156				31423.1	PBT 1200/3/5,0 GN	120
30722.1	STLZ 950/2/5,08-H-F-HC GN	156				31424.1	PBT 1200/4/5,0 GN	120
30723.1	STLZ 950/3/5,08-H-F-HC GN	156				31425.1	PBT 1200/5/5,0 GN	120
30724.1	STLZ 950/4/5,08-H-F-HC GN	156				31426.1	PBT 1200/6/5,0 GN	120
30725.1	STLZ 950/5/5,08-H-F-HC GN	156				31427.1	PBT 1200/7/5,0 GN	120
30726.1	STLZ 950/6/5,08-H-F-HC GN	156				31428.1	PBT 1200/8/5,0 GN	120
30727.1	STLZ 950/7/5,08-H-F-HC GN	156				31429.1	PBT 1200/9/5,0 GN	120
30728.1	STLZ 950/8/5,08-H-F-HC GN	156				31430.1	PBT 1200/10/5,0 GN	120
30729.1	STLZ 950/9/5,08-H-F-HC GN	156				31431.1	PBT 1200/11/5,0 GN	120
30730.1	STLZ 950/10/5,08-H-F-HC GN	156				31432.1	PBT 1200/12/5,0 GN	120
30731.1	STLZ 950/11/5,08-H-F-HC GN	156				31433.1	PBT 1200/13/5,0 GN	120
30732.1	STLZ 950/12/5,08-H-F-HC GN	156				31434.1	PBT 1200/14/5,0 GN	120
30741.7	PBK 4091/1/KD 4,0-SMD WH	22				31435.1	PBT 1200/15/5,0 GN	120
30742.7	PBK 4091/2/KD 4,0-SMD WH	22				31436.1	PBT 1200/16/5,0 GN	120
30743.7	PBK 4091/3/KD 4,0-SMD WH	22				31437.1	PBT 1200/17/5,0 GN	120
30744.7	PBK 4091/4/KD 4,0-SMD WH	22				31438.1	PBT 1200/18/5,0 GN	120
30752.1	PFBZ 4551/2/7,62-KD GN	96				31439.1	PBT 1200/19/5,0 GN	120
30753.1	PFBZ 4551/3/7,62-KD GN	96				31440.1	PBT 1200/20/5,0 GN	120
30754.1	PFBZ 4551/4/7,62-KD GN	96				31441.1	PBT 1200/21/5,0 GN	120
30755.1	PFBZ 4551/5/7,62-KD GN	96				31442.1	PBT 1200/22/5,0 GN	120
30756.1	PFBZ 4551/6/7,62-KD GN	96				31443.1	PBT 1200/23/5,0 GN	120
30757.1	PFBZ 4551/7/7,62-KD GN	96				31444.1	PBT 1200/24/5,0 GN	120
30758.1	PFBZ 4551/8/7,62-KD GN	96				31452.1	PKZ 601/2/3,81-V GN	40
30759.1	PFBZ 4551/9/7,62-KD GN	96				31453.1	PKZ 601/3/3,81-V GN	40
30760.1	PFBZ 4551/10/7,62-KD GN	96				31454.1	PKZ 601/4/3,81-V GN	40
30762.1	PFBZ 4551/2/7,62-FKD GN	96				31455.1	PKZ 601/5/3,81-V GN	40
30763.1	PFBZ 4551/3/7,62-FKD GN	96				31456.1	PKZ 601/6/3,81-V GN	40
30764.1	PFBZ 4551/4/7,62-FKD GN	96				31457.1	PKZ 601/7/3,81-V GN	40
30765.1	PFBZ 4551/5/7,62-FKD GN	96				31458.1	PKZ 601/8/3,81-V GN	40
30766.1	PFBZ 4551/6/7,62-FKD GN	96				31459.1	PKZ 601/9/3,81-V GN	40
30767.1	PFBZ 4551/7/7,62-FKD GN	96				31460.1	PKZ 601/10/3,81-V GN	40
30768.1	PFBZ 4551/8/7,62-FKD GN	96				31461.1	PKZ 601/11/3,81-V GN	40
30769.1	PFBZ 4551/9/7,62-FKD GN	96				31462.1	PKZ 601/12/3,81-V GN	40
30770.1	PFBZ 4551/10/7,62-FKD GN	96				31463.1	PKZ 601/13/3,81-V GN	40
30772.1	PZK 3001/2/5,00/5,08-WD GN	28				31464.1	PKZ 601/14/3,81-V GN	40
30773.1	PZK 3001/3/5,00/5,08-WD GN	28				31465.1	PKZ 601/15/3,81-V GN	40
30774.1	PZK 3001/4/5,00/5,08-WD GN	28				31466.1	PKZ 601/16/3,81-V GN	40
30775.1	PZK 3001/5/5,00/5,08-WD GN	28				31467.1	PKZ 601/17/3,81-V GN	40
30776.1	PZK 3001/6/5,00/5,08-WD GN	28				31468.1	PKZ 601/18/3,81-V GN	40
30777.1	PZK 3001/7/5,00/5,08-WD GN	28				31469.1	PKZ 601/19/3,81-V GN	40

31


31302.1	PZK 3021/2/10,00/10,16-WD GN	36
31303.1	PZK 3021/3/10,00/10,16-WD GN	36
31304.1	PZK 3021/4/10,00/10,16-WD GN	36
31305.1	PZK 3021/5/10,00/10,16-WD GN	36
31306.1	PZK 3021/6/10,00/10,16-WD GN	36
31307.1	PZK 3021/7/10,00/10,16-WD GN	36
31308.1	PZK 3021/8/10,00/10,16-WD GN	36
31309.1	PZK 3021/9/10,00/10,16-WD GN	36
31310.1	PZK 3021/10/10,00/10,16-WD GN	36
31311.1	PZK 3021/11/10,00/10,16-WD GN	36
31312.1	PZK 3021/12/10,00/10,16-WD GN	36
31313.1	PZK 3021/13/10,00/10,16-WD GN	36
31314.1	PZK 3021/14/10,00/10,16-WD GN	36
31315.1	PZK 3021/15/10,00/10,16-WD GN	36
31316.1	PZK 3021/16/10,00/10,16-WD GN	36
31317.1	PZK 3021/17/10,00/10,16-WD GN	36
31318.1	PZK 3021/18/10,00/10,16-WD GN	36
31319.1	PZK 3021/19/10,00/10,16-WD GN	36
31320.1	PZK 3021/20/10,00/10,16-WD GN	36
31321.1	PZK 3021/21/10,00/10,16-WD GN	36
31322.1	PZK 3021/22/10,00/10,16-WD GN	36
31323.1	PZK 3021/23/10,00/10,16-WD GN	36
31324.1	PZK 3021/24/10,00/10,16-WD GN	36
31332.1	PZK 3011/2/7,50/7,62-WD GN	34
31333.1	PZK 3011/3/7,50/7,62-WD GN	34
31334.1	PZK 3011/4/7,50/7,62-WD GN	34
31335.1	PZK 3011/5/7,50/7,62-WD GN	34
31336.1	PZK 3011/6/7,50/7,62-WD GN	34
31337.1	PZK 3011/7/7,50/7,62-WD GN	34
31338.1	PZK 3011/8/7,50/7,62-WD GN	34
31339.1	PZK 3011/9/7,50/7,62-WD GN	34
31340.1	PZK 3011/10/7,50/7,62-WD GN	34
31341.1	PZK 3011/11/7,50/7,62-WD GN	34
31342.1	PZK 3011/12/7,50/7,62-WD GN	34
31343.1	PZK 3011/13/7,50/7,62-WD GN	34
31344.1	PZK 3011/14/7,50/7,62-WD GN	34
31345.1	PZK 3011/15/7,50/7,62-WD GN	34
31346.1	PZK 3011/16/7,50/7,62-WD GN	34
31347.1	PZK 3011/17/7,50/7,62-WD GN	34
31348.1	PZK 3011/18/7,50/7,62-WD GN	34
31349.1	PZK 3011/19/7,50/7,62-WD GN	34
31350.1	PZK 3011/20/7,50/7,62-WD GN	34
31351.1	PZK 3011/21/7,50/7,62-WD GN	34
31352.1	PZK 3011/22/7,50/7,62-WD GN	34
31353.1	PZK 3011/23/7,50/7,62-WD GN	34
31354.1	PZK 3011/24/7,50/7,62-WD GN	34
31362.1	PBT 1200/2/5,08-F GN	121
31363.1	PBT 1200/3/5,08-F GN	121
31364.1	PBT 1200/4/5,08-F GN	121
31365.1	PBT 1200/5/5,08-F GN	121
31366.1	PBT 1200/6/5,08-F GN	121
31367.1	PBT 1200/7/5,08-F GN	121
31368.1	PBT 1200/8/5,08-F GN	121
31369.1	PBT 1200/9/5,08-F GN	121
31370.1	PBT 1200/10/5,08-F GN	121
31371.1	PBT 1200/11/5,08-F GN	121
31372.1	PBT 1200/12/5,08-F GN	121

Cat. no.	Type	Page	Cat. no.	Type	Page	Cat. no.	Type	Page
31470.1	PKZ 601/20/3,81-V GN	40	31673.1	STL 1541/13/3,50-V-G GN	136	31753.1	STL 1550/13/3,50-V-FR GN	137
31471.1	PKZ 601/21/3,81-V GN	40	31674.1	STL 1541/14/3,50-V-G GN	136	31754.1	STL 1550/14/3,50-V-FR GN	137
31472.1	PKZ 601/22/3,81-V GN	40	31675.1	STL 1541/15/3,50-V-G GN	136	31755.1	STL 1550/15/3,50-V-FR GN	137
31473.1	PKZ 601/23/3,81-V GN	40	31676.1	STL 1541/16/3,50-V-G GN	136	31756.1	STL 1550/16/3,50-V-FR GN	137
31474.1	PKZ 601/24/3,81-V GN	40	31677.1	STL 1541/17/3,50-V-G GN	136	31757.1	STL 1550/17/3,50-V-FR GN	137
31483.1	PK 700/3/5,0-V-BR GN	44	31678.1	STL 1541/18/3,50-V-G GN	136	31758.1	STL 1550/18/3,50-V-FR GN	137
31492.1	PK 350/2/5,0-V-BR GN	42	31679.1	STL 1541/19/3,50-V-G GN	136	31759.1	STL 1550/19/3,50-V-FR GN	137
31493.1	PK 350/3/5,0-V-BR GN	42	31680.1	STL 1541/20/3,50-V-G GN	136	31760.1	STL 1550/20/3,50-V-FR GN	137
31494.1	PK 350/4/5,0-V-BR GN	42	31682.1	STL 1541/2/3,50-H-G GN	136	31762.1	STL 1550/2/3,50-H-FR GN	137
31502.1	PFBZ 4961/2/7,62-KD GN	95	31683.1	STL 1541/3/3,50-H-G GN	136	31763.1	STL 1550/3/3,50-H-FR GN	137
31503.1	PFBZ 4961/3/7,62-KD GN	95	31684.1	STL 1541/4/3,50-H-G GN	136	31764.1	STL 1550/4/3,50-H-FR GN	137
31504.1	PFBZ 4961/4/7,62-KD GN	95	31685.1	STL 1541/5/3,50-H-G GN	136	31765.1	STL 1550/5/3,50-H-FR GN	137
31505.1	PFBZ 4961/5/7,62-KD GN	95	31686.1	STL 1541/6/3,50-H-G GN	136	31766.1	STL 1550/6/3,50-H-FR GN	137
31506.1	PFBZ 4961/6/7,62-KD GN	95	31687.1	STL 1541/7/3,50-H-G GN	136	31767.1	STL 1550/7/3,50-H-FR GN	137
31507.1	PFBZ 4961/7/7,62-KD GN	95	31688.1	STL 1541/8/3,50-H-G GN	136	31768.1	STL 1550/8/3,50-H-FR GN	137
31508.1	PFBZ 4961/8/7,62-KD GN	95	31689.1	STL 1541/9/3,50-H-G GN	136	31769.1	STL 1550/9/3,50-H-FR GN	137
31509.1	PFBZ 4961/9/7,62-KD GN	95	31690.1	STL 1541/10/3,50-H-G GN	136	31770.1	STL 1550/10/3,50-H-FR GN	137
31510.1	PFBZ 4961/10/7,62-KD GN	95	31691.1	STL 1541/11/3,50-H-G GN	136	31771.1	STL 1550/11/3,50-H-FR GN	137
31511.1	PFBZ 4961/11/7,62-KD GN	95	31692.1	STL 1541/12/3,50-H-G GN	136	31772.1	STL 1550/12/3,50-H-FR GN	137
31512.1	PFBZ 4961/12/7,62-KD GN	95	31693.1	STL 1541/13/3,50-H-G GN	136	31773.1	STL 1550/13/3,50-H-FR GN	137
31602.1	PFBZ 4961/2/7,62-FKD GN	95	31694.1	STL 1541/14/3,50-H-G GN	136	31774.1	STL 1550/14/3,50-H-FR GN	137
31603.1	PFBZ 4961/3/7,62-FKD GN	95	31695.1	STL 1541/15/3,50-H-G GN	136	31775.1	STL 1550/15/3,50-H-FR GN	137
31604.1	PFBZ 4961/4/7,62-FKD GN	95	31696.1	STL 1541/16/3,50-H-G GN	136	31776.1	STL 1550/16/3,50-H-FR GN	137
31605.1	PFBZ 4961/5/7,62-FKD GN	95	31697.1	STL 1541/17/3,50-H-G GN	136	31777.1	STL 1550/17/3,50-H-FR GN	137
31606.1	PFBZ 4961/6/7,62-FKD GN	95	31698.1	STL 1541/18/3,50-H-G GN	136	31778.1	STL 1550/18/3,50-H-FR GN	137
31607.1	PFBZ 4961/7/7,62-FKD GN	95	31699.1	STL 1541/19/3,50-H-G GN	136	31779.1	STL 1550/19/3,50-H-FR GN	137
31608.1	PFBZ 4961/8/7,62-FKD GN	95	31700.1	STL 1541/20/3,50-H-G GN	136	31780.1	STL 1550/20/3,50-H-FR GN	137
31609.1	PFBZ 4961/9/7,62-FKD GN	95	31702.1	STL 1541/2/3,50-V-FR GN	138	31782.1	STLZ 1520/2/5,08-V-G GN	150
31610.1	PFBZ 4961/10/7,62-FKD GN	95	31703.1	STL 1541/3/3,50-V-FR GN	138	31783.1	STLZ 1520/3/5,08-V-G GN	150
31611.1	PFBZ 4961/11/7,62-FKD GN	95	31704.1	STL 1541/4/3,50-V-FR GN	138	31784.1	STLZ 1520/4/5,08-V-G GN	150
31612.1	PFBZ 4961/12/7,62-FKD GN	95	31705.1	STL 1541/5/3,50-V-FR GN	138	31785.1	STLZ 1520/5/5,08-V-G GN	150
31622.1	PK 710/2/15,0-V GN	61	31706.1	STL 1541/6/3,50-V-FR GN	138	31786.1	STLZ 1520/6/5,08-V-G GN	150
31623.1	PK 710/3/15,0-V GN	61	31707.1	STL 1541/7/3,50-V-FR GN	138	31787.1	STLZ 1520/7/5,08-V-G GN	150
31624.1	PK 710/4/15,0-V GN	61	31708.1	STL 1541/8/3,50-V-FR GN	138	31788.1	STLZ 1520/8/5,08-V-G GN	150
31625.1	PK 710/5/15,0-V GN	61	31709.1	STL 1541/9/3,50-V-FR GN	138	31789.1	STLZ 1520/9/5,08-V-G GN	150
31626.1	PK 710/6/15,0-V GN	61	31710.1	STL 1541/10/3,50-V-FR GN	138	31790.1	STLZ 1520/10/5,08-V-G GN	150
31632.1	PFB 4541/2/3,50-KD GN	88	31711.1	STL 1541/11/3,50-V-FR GN	138	31791.1	STLZ 1520/11/5,08-V-G GN	150
31633.1	PFB 4541/3/3,50-KD GN	88	31712.1	STL 1541/12/3,50-V-FR GN	138	31792.1	STLZ 1520/12/5,08-V-G GN	150
31634.1	PFB 4541/4/3,50-KD GN	88	31713.1	STL 1541/13/3,50-V-FR GN	138	31802.1	STLZ 1520/2/5,08-H-G GN	150
31635.1	PFB 4541/5/3,50-KD GN	88	31714.1	STL 1541/14/3,50-V-FR GN	138	31803.1	STLZ 1520/3/5,08-H-G GN	150
31636.1	PFB 4541/6/3,50-KD GN	88	31715.1	STL 1541/15/3,50-V-FR GN	138	31804.1	STLZ 1520/4/5,08-H-G GN	150
31637.1	PFB 4541/7/3,50-KD GN	88	31716.1	STL 1541/16/3,50-V-FR GN	138	31805.1	STLZ 1520/5/5,08-H-G GN	150
31638.1	PFB 4541/8/3,50-KD GN	88	31717.1	STL 1541/17/3,50-V-FR GN	138	31806.1	STLZ 1520/6/5,08-H-G GN	150
31639.1	PFB 4541/9/3,50-KD GN	88	31718.1	STL 1541/18/3,50-V-FR GN	138	31807.1	STLZ 1520/7/5,08-H-G GN	150
31640.1	PFB 4541/10/3,50-KD GN	88	31719.1	STL 1541/19/3,50-V-FR GN	138	31808.1	STLZ 1520/8/5,08-H-G GN	150
31641.1	PFB 4541/11/3,50-KD GN	88	31720.1	STL 1541/20/3,50-V-FR GN	138	31809.1	STLZ 1520/9/5,08-H-G GN	150
31642.1	PFB 4541/12/3,50-KD GN	88	31722.1	STL 1541/2/3,50-H-FR GN	138	31810.1	STLZ 1520/10/5,08-H-G GN	150
31643.1	PFB 4541/13/3,50-KD GN	88	31723.1	STL 1541/3/3,50-H-FR GN	138	31811.1	STLZ 1520/11/5,08-H-G GN	150
31644.1	PFB 4541/14/3,50-KD GN	88	31724.1	STL 1541/4/3,50-H-FR GN	138	31812.1	STLZ 1520/12/5,08-H-G GN	150
31645.1	PFB 4541/15/3,50-KD GN	88	31725.1	STL 1541/5/3,50-H-FR GN	138	31822.1	STLZ 1550/2/7,62-V-G GN	165
31646.1	PFB 4541/16/3,50-KD GN	88	31726.1	STL 1541/6/3,50-H-FR GN	138	31823.1	STLZ 1550/3/7,62-V-G GN	165
31647.1	PFB 4541/17/3,50-KD GN	88	31727.1	STL 1541/7/3,50-H-FR GN	138	31824.1	STLZ 1550/4/7,62-V-G GN	165
31648.1	PFB 4541/18/3,50-KD GN	88	31728.1	STL 1541/8/3,50-H-FR GN	138	31825.1	STLZ 1550/5/7,62-V-G GN	165
31649.1	PFB 4541/19/3,50-KD GN	88	31729.1	STL 1541/9/3,50-H-FR GN	138	31826.1	STLZ 1550/6/7,62-V-G GN	165
31650.1	PFB 4541/20/3,50-KD GN	88	31730.1	STL 1541/10/3,50-H-FR GN	138	31827.1	STLZ 1550/7/7,62-V-G GN	165
31652.1	PFB 4541/2/3,50-FRKD GN	88	31731.1	STL 1541/11/3,50-H-FR GN	138	31828.1	STLZ 1550/8/7,62-V-G GN	165
31653.1	PFB 4541/3/3,50-FRKD GN	88	31732.1	STL 1541/12/3,50-H-FR GN	138	31829.1	STLZ 1550/9/7,62-V-G GN	165
31654.1	PFB 4541/4/3,50-FRKD GN	88	31733.1	STL 1541/13/3,50-H-FR GN	138	31830.1	STLZ 1550/10/7,62-V-G GN	165
31655.1	PFB 4541/5/3,50-FRKD GN	88	31734.1	STL 1541/14/3,50-H-FR GN	138	31832.1	STLZ 1550/2/7,62-H-G GN	165
31656.1	PFB 4541/6/3,50-FRKD GN	88	31735.1	STL 1541/15/3,50-H-FR GN	138	31833.1	STLZ 1550/3/7,62-H-G GN	165
31657.1	PFB 4541/7/3,50-FRKD GN	88	31736.1	STL 1541/16/3,50-H-FR GN	138	31834.1	STLZ 1550/4/7,62-H-G GN	165
31658.1	PFB 4541/8/3,50-FRKD GN	88	31737.1	STL 1541/17/3,50-H-FR GN	138	31835.1	STLZ 1550/5/7,62-H-G GN	165
31659.1	PFB 4541/9/3,50-FRKD GN	88	31738.1	STL 1541/18/3,50-H-FR GN	138	31836.1	STLZ 1550/6/7,62-H-G GN	165
31660.1	PFB 4541/10/3,50-FRKD GN	88	31739.1	STL 1541/19/3,50-H-FR GN	138	31837.1	STLZ 1550/7/7,62-H-G GN	165
31661.1	PFB 4541/11/3,50-FRKD GN	88	31740.1	STL 1541/20/3,50-H-FR GN	138	31838.1	STLZ 1550/8/7,62-H-G GN	165
31662.1	PFB 4541/12/3,50-FRKD GN	88	31742.1	STL 1550/2/3,50-V-FR GN	137	31839.1	STLZ 1550/9/7,62-H-G GN	165
31663.1	PFB 4541/13/3,50-FRKD GN	88	31743.1	STL 1550/3/3,50-V-FR GN	137	31840.1	STLZ 1550/10/7,62-H-G GN	165
31664.1	PFB 4541/14/3,50-FRKD GN	88	31744.1	STL 1550/4/3,50-V-FR GN	137	31842.1	STLZ 1550/2/7,62-V-F GN	166
31665.1	PFB 4541/15/3,50-FRKD GN	88	31745.1	STL 1550/5/3,50-V-FR GN	137	31843.1	STLZ 1550/3/7,62-V-F GN	166
31666.1	PFB 4541/16/3,50-FRKD GN	88	31746.1	STL 1550/6/3,50-V-FR GN	137	31844.1	STLZ 1550/4/7,62-V-F GN	166
31667.1	PFB 4541/17/3,50-FRKD GN	88	31747.1	STL 1550/7/3,50-V-FR GN	137	31845.1	STLZ 1550/5/7,62-V-F GN	166
31668.1	PFB 4541/18/3,50-FRKD GN	88	31748.1	STL 1550/8/3,50-V-FR GN	137	31846.1	STLZ 1550/6/7,62-V-F GN	166
31669.1	PFB 4541/19/3,50-FRKD GN	88	31749.1	STL 1550/9/3,50-V-FR GN	137	31847.1	STLZ 1550/7/7,62-V-F GN	166
31670.1	PFB 4541/20/3,50-FRKD GN	88	31750.1	STL 1550/10/3,50-V-FR GN	137	31848.1	STLZ 1550/8/7,62-V-F GN	166
31671.1	STL 1541/11/3,50-V-G GN	136	31751.1	STL 1550/11/3,50-V-FR GN	137	31849.1	STLZ 1550/9/7,62-V-F GN	166
31672.1	STL 1541/12/3,50-V-G GN	136	31752.1	STL 1550/12/3,50-V-FR GN	137	31850.1	STLZ 1550/10/7,62-V-F	166

Otto-Hahn-Str. 7
D-33161 Hövelhof,
Germany

Phone +49 (0) 5257 9833-0
Fax +49 (0) 5257 9833-33

info@conta-clip.com
www.conta-clip.com



Our products for your challenges:

01 CONTA-CONNECT
Terminal blocks
with push-in connection system
Cat. no. 98070.2

02 CONTA-CONNECT
Terminal blocks with screw connection
system and special purpose terminals
Cat. no. 98071.2

03 CONTA-CONNECT
Terminal blocks with tension-spring
connection system
Cat. no. 98072.2

04 CONTA-CONNECT
Installation materials and
other accessories for terminal blocks
Cat. no. 98073.2

05 CONTA-LABEL
Marking components
for thermal-transfer marking systems
Cat. no. 98074.2

06 CONTA-LABEL
Marking components
for ink-based marking systems
Cat. no. 98075.2

07 CONTA-BOX
Housings
Cat. no. 98076.2

08 CONTA-CABLE
KDS cable entries, KES cable entries,
SAB|SSAB|SABK shielding solutions
Cat. no. 98077.2

09 CONTA-ELECTRONICS
Electrical and electronic cabinet components
Cat. no. 98078.2

10 CONTA-CON
PCB terminals and connectors
Cat. no. 98079.2